

Standards for Technology in Automotive Retail

Implementation Guidelines Change Repair Order Repository Version Rev4.5.4

Table of Contents

<u>Overview</u>	
Schema Field Usage	1
Business Scenario	2
Relationship Diagram	3
Schema Document Properties	4
Components and Data Types	5
Address	5
AddressBase	6
AlternatePartyId	7
<u>Amount</u>	7
ApplicationArea	
AuthorizationPayMaximum	9
AuthorizationPayPercent	9
BatteryProration	10
BatteryVoltage	10
BrandedInfo	
BrandingStateCode	
BusinessObjectDocument	
CampaignBulletinId	
CampaignDescription	
CarrierId	
<u>CASE</u>	
<u>CaseReasonDescription</u>	
CauseDescription	
<u>Change</u>	
<u>ChangeRepairOrder</u>	
<u>ChangeRepairOrderDataArea</u>	
ClaimSubmissionCount	
<u>CodesAndComments</u>	
CodesAndCommentsBase	
CodesAndCommentsExpanded	
CodeType	23

<u>ComplaintDescription</u>	23
Confirmable Verb	24
ContactBase	24
ContractDeductible	
ContractId	26
ContractPlanDescription	26
ContractStartMileage	
ContractTermMileage	27
CorrectionDescription	28
Count	28
<u>Coupon</u>	28
CouponDescription	29
CouponDiscountAmount	30
Couponld	30
CustomerMaximumAmount	30
CustomerPercent	31
<u>DailyRate</u>	31
<u>Damage</u>	32
DealerPartyBase	32
DeductibleAmount	33
<u>DeliveryMileage</u>	33
DepartmentDescription	34
Description	34
Destination	35
Diagnostics	36
DocumentId	38
DoorsQuantity	39
EngineDescription	39
ExpenseHours	39
FailureCodeDescription	
FleetVehicleId	
FullServiceContract	41
Goodwill	43

HandlingAmount	44
HeaderBase	45
<u>Hours</u>	45
<u>ld</u>	46
IndividualOwnerParty	46
IndividualOwnerPartyExtended	47
IndividualOwnerPartyExtendedRO	48
IndividualPartyAddress	
IndividualPartyAlternatePartyId	50
IndividualPartyBase	_
IndividualPartyContact	
IndividualPartyContactEMail	53
IndividualPartyContactFax	
IndividualPartyContactTelephoneNumber	
IndividualPartyPersonName	
InternalMaximumAmount	
InternalPay	
InternalPercent	
<u>ltemId</u>	
ItemIdDescription	
<u>ItemQuantity</u>	
<u>Job</u>	
<u>JobDenialDescription</u>	
<u>JobLaborRate</u>	
JobReferback	
LaborActualHours	
<u>LaborAdditionalHours</u>	
<u>LaborAllowanceHours</u>	
<u>LaborCostPercent</u>	
<u>LaborNarrative</u>	
<u>LaborOperationDescription</u>	
<u>LaborOperationId</u>	
LaborOperationQuantity	67

LaborRate	67
LocationId	68
MarkupPercentage	68
MaximumRentalAmount	68
Measurement	69
Mileage	69
MileageIn	70
MileageOut	70
MinimalDemographics	71
NonTaxableAmount	71
OperationId	72
OperationName	72
<u>OptionBase</u>	72
<u>OptionType</u>	
OrganizationAddress	74
OrganizationalOwnerParty	
OrganizationalOwnerPartyExtended	
OrganizationalOwnerPartyExtendedRO	
OrganizationalPartyAlternatePartyId	
OrganizationContact	
OrganizationContactExtended	
OrganizationContactPersonName	
OrganizationPartyBase	
OrganizationPartyEmail	
OrganizationPartyFax	
OrganizationPartyTelephone	
PartDealerNumer	
PartMaximumAmount	_
PartNameCode	
PartNameCodeDescription	
PartsCostPercent	
PartyBase	
Partyld	86

Percent	
PreAdjustmentAmount	87
Price	
Quantity	88
RentalAllowance	89
RentDaysQuantity	89
RentLoaner	90
RentLoanerBase	91
RentLoanerHours	92
RepairOrder	93
RepairOrderHeader	94
ReplacementSerialNumbers	
RestrictionDescription	99
ROServiceDealerParty	99
SecondaryDealerNumber	100
Sender Sender	101
SenderBase	
ServiceAdvisor	105
ServiceCampaign	106
ServiceCampaignExtended	107
ServiceComponents	108
ServiceContractBase	109
ServiceContractStatus	111
ServiceDealerParty	
ServiceDescription	112
Serviceld	113
ServiceLabor ServiceLabor	113
ServiceLaborBase	116
ServiceOption	117
ServiceParts	118
ServicePartsBase	
ServiceTechnician	120
ServiceVehicle	

SeverityCode	
Signature	124
SparePartMileage	125
SplitPercent	. 126
Splits	126
<u>SubDealerNumber</u>	. 127
<u>Sublet</u>	
SubletLaborCostPercent	
SubletPartsCostPercent	130
SubletWorkDescription	131
SymptomCodeDescription	131
<u>「ax</u>	
<u>FaxableAmount</u>	133
<u> </u>	133
<u>FaxDescription</u>	
<u>FaxRate</u>	
<u>FechnicianBase</u>	134
<u> Term </u>	
<u>FireTreadDepth</u>	
<u>FotalAmount</u>	
FotalContractAmount	
FotalCost	_
<u>FotalTaxableAmount</u>	
<u>FowingAllowance</u>	138
<u>Fransportation</u>	
<u>JnitCost</u>	
<u>JnitPrice</u>	
<u>JnitSalesTaxAmount</u>	140
<u>/ehicle</u>	141
<u>VehicleBase</u>	. 141
VehicleConcernQuestionAnswer	
<u>/erb</u>	
<u>Warranty</u>	144

<u>WarrantyAdditional</u>	146
<u>WarrantyBase</u>	148
WarrantyClaim	149
WarrantyClaimBase	153
WarrantyClaimDeductible	
WarrantyClaimHistory	155
<u>WarrantyEndMileage</u>	
WarrantyPercent	157
WarrantyStartMileage	157
WarrantyTypeDescription	
AccessoryClaimType	158
ACCompressorSerialNumber	158
AdditionalHoursLaborComment	159
AddOnRepairInd	
AddressLine	159
AddressQualifier	159
AppealActionCode	
AppealReasonCode	160
AreaCode	161
AssigningOrganizationPartyId	161
AssigningPartyId	
AuthorizationCode	162
AuthorizationNumber	163
AuthorizationPayType	163
AxleCode	163
BatteryWarrantyCode	163
BirthDate	
BodyStyle	
BrandedTitleDate	
BrandedTitleInd	164

<u>BrandingSource</u>	165
BrandingStateReference	165
BusinessCenter	165
CampaignDispositionCode	166
CampaignNotes	166
<u>CampaignNumber</u>	166
<u>CampaignOptionCode</u>	
CampaignReimbursementCode	167
<u>CaseNumber</u>	167
CaseOpenDate	167
<u>CaseOwner</u>	168
CaseReasonNarrative	168
CaseType	168
CauseCode	169
CertifiedPreownedInd	169
<u>City</u>	169
<u>ClaimCategory</u>	170
ClaimContinuationCode	170
<u>ClaimNumber</u>	
<u>ClaimType</u>	170
Code	171
CompanyName	171
ComplaintCode	171
ComplaintCodeType	171
ComplaintPriority	172
CompleteIncomplete	172
ComponentType	172
ConcernAnswer	173
ConcernQuestion	173
Condition	
ConfirmType	174
ContactTelephoneNumberDescription	
ContactTelephoneNumberOrganizationDescription	175

<u>ContactTime</u>	175
ContractCompanyName	175
ContractEffectiveDate	
ContractExpirationDate	176
ContractNote	176
ContractOwnerName	176
ContractPlanCode	177
ContractPlanStates	177
ContractStartDate	177
ContractTransferInd	177
ContractTransferredInd	178
ContractTripInterruptInd	
ContractType	
Country	179
County	191
CouponComment	191
Currency	191
CustomerChangeInd	199
DamageCode	199
DataCollectionStatus	199
<u>Date</u>	200
Date Time	200
DBAName	200
DealerInstallationInd	201
DealerName	201
DeductibleType	201
DeductibleWaiverInd	202
DefectCode	202
DelayedInspectionCode	202
DeliveryDate	202
Department	
DepartmentType	203
<u>DiagnosticCodes</u>	203

<u>DiagnosticProcessCode</u>	203
DiagnosticResultType	204
<u>DiagnosticResultValue</u>	204
<u>DistrictCode</u>	204
DocumentDateTime	204
<u>DriverAction</u>	205
EngineDisplacement	205
EngineLightInd	206
EngineNumber	206
ESCFranchiseInd	206
ExpirationDate	207
ExteriorColor	
ExternalReferenceNumber	207
FailureCode	207
<u>FamilyName</u>	208
FirstDayRentalInd	
FleetAccount	208
FleetPurchaseOrderNumber	208
FormattedName	209
FreightClaimNumber	209
<u>Gender</u>	209
<u> GivenName</u>	210
GroupNumber	210
HazmatInd	210
HomeWork	211
gnitionKeyNumber	211
ndicator	211
nsuranceCompanyName	212
nteriorColor	212
ssuingState	212
JobDenialCode	212
JobGoodwillInd	213
JobNumber	213

<u>JobReferbackNumber</u>	213
<u>JobStatus</u>	213
<u>JobType</u>	214
LaborActionCode	214
LaborOperationComment	214
LaborOperationIdType	214
LaborOperationLocation	215
<u>LaborOperationPolicyCode</u>	215
Language	
<u>LicenseNumber</u>	222
<u>ListNumber</u>	222
LoanerVehicleInd	223
LocationDescription	223
MainOperationCode	223
MajorDamageCode	
<u>Make</u>	224
ManualReviewCode	224
Manufacturer	224
MarketCode	
MarketingMailInd	225
<u>MarkupType</u>	225
MasterShieldInd	
<u>MiddleName</u>	226
MileageMeasure	_
MiscellaneousNotes	
<u>Model</u>	
ModelDescription	
<u>ModelYear</u>	227
<u>Name</u>	228
Narrative	
NarrativeType	
NoChargeLaborCode	228
NonUSVehicleInd	229

Note	229
NotificationDate	229
NotificationReason	
OdometerStatus	230
OEMClaimNumber	230
OEMVehicleInd	230
OptionName	231
OptionSecurityCode	231
<u>OptionStockNumber</u>	
OrderInternalNotes	
OrderNotes	232
OriginalRepairOrderNumber	232
OriginalSerialNumber	232
OriginCode	232
PackageCode	233
PartAccessoryInd	233
PartDealerName	233
PartSourceCode	233
<u>PartType</u>	
PCMFailureCode	234
PostalCode	234
PreferredContactMethod	235
PreferredContactMethodOrganization	
PreferredLanguagePreferredLanguage	236
PriceExplanation	242
<u>PriceType</u>	243
PrimaryContactInd	244
PrimaryDriverInd	244
PriorClaimNumber	245
Priority	
ProviderName	245
ReceiptNumber	246
Reference	246

ReferenceNumber	246
RegisteredMailReceiptNumber	246
RelationshipCode	247
RentInDate RentInDate	247
RentLoan	247
RentLoanerCode	247
RentLoanerInvoiceNumber	248
RentLoanerReasonCode	248
RentNotes	248
RentOutDate	
RepairOrderCompletedDate	249
RepairOrderInvoiceDate	249
RepairOrderOpenedDate	249
RepeatRepairInd	250
ReplacementSerialNumber	250
RestrictionInd	250
RoadHazardInd	251
RoadsideAssistanceInd	251
<u>SaleClass</u>	251
Salutation	252
SecondaryPassword	252
SecondaryReferenceNumber	253
SerialNumber	253
ServiceAdvisorName	253
ServiceCode	253
ShortMfg	254
SortName	254
SparePartDate	254
SparePartInvoiceNumber	254
SplitsType	
StateOrProvince	255
StatusCode	256
StatusText	

StatusType	257
SubletCode	258
SubletInvoiceNumber	258
<u>Suffix</u>	259
SupplementalCampaignInd	259
SymptomCode	259
SystemVersion	259
<u>TaxabilityInd</u>	
TaxType	260
TaxTypeld	
<u>TeamName</u>	263
TechnicianName	264
TechnicianNotes	264
TechnicianSkillArea	264
TechnicianSkillLevel	264
TelematicsServiceInd	265
TermLength	265
<u>Text</u>	266
TowedInInd	266
TransmissionCode	266
TransmissionType	
TransportationCarrier	268
TreadActInd	268
<u>TrimCode</u>	268
<u>Type</u>	269
<u>UOM</u>	
<u>UrbanizationCode</u>	270
<u>URI</u>	270
VehicleArrivalDate	271
VehicleDemoInd	
VehicleNote	271
VehicleStock	272
<u>VIN</u>	272

WarrantyAppealInd	272
WarrantyExpirationDate	
WarrantyNotes	273
WarrantyProgramCode	273
WarrantyRemaining	273
WarrantyStartDate	273
WarrantyStatus	274
WarrantyTransferInd	274
<u>Year</u>	274
ZoneCode	275
Fields and Global Attributes	276
ApplicationArea	276
<u>Change</u>	276
ChangeRepairOrder	277
Header	278
InternalPay	279
<u>Job</u>	280
<u>JobReferback</u>	281
RepairOrder	281
<u>Verb</u>	282
WarrantyClaim	282

Change Repair Order Guidelines

Overview

This document is a guideline on how to use the Change Repair Order Business Object Document (BOD). Change Repair Order has been defined in the context of STAR for the Automotive Retail Industry. The scope of this BOD is to define the Change Repair Order process for individual consumers who service their automobiles through their OEM's authorized Dealers. The focus is on Dealer and OEM interactions, not third party organizations. NOTE: Although this is the traditional use of the Change Repair Order, this BOD could be used to send Change Repair Order information between any two business parties.

Implementation Guidelines provide detailed information regarding the structure and meaning of the Change Repair Order BOD and corresponds directly to the Change Repair Order schema. In addition to structure and meaning, the Implementation Guidelines identify various business rules for specific fields/components that due to their nature, i.e. field interdependence, are not possible to express using schema. Please note that although these business rules are not included in the schema, they <u>MUST</u> be followed to be STAR Compliant. Therefore, the Change Repair Order Implementation Guidelines must be used in concert with the Change Repair Order schema during development and should <u>NOT</u> be considered a supplement or substitution to the schema. For more information regarding STAR XML Data Compliance, please review the STAR Data Compliance Guidelines document located on the STAR Web site.

For a copy of the corresponding Change Repair Order schema, please download the appropriate STAR schema repository from the XML portion of the STAR website (www.starstandard.org). Prior to downloading the schema, users are encouraged to download the STAR XML Reference/Implementation document also located on the XML portion of the STAR website. This document provides an overview of the STAR BOD development methodology, how to download and read STAR schema, and various frequently asked questions related to the implementation of STAR BODs.

STAR has followed the Open Application Group's Business Object Document methodology to develop the Change Repair Order BOD. Where possible, STAR has mapped to existing OAGI fields and components. Note however that the STAR Change Repair Order BOD is unique to the Retail Automotive industry and is not an extension of any existing OAGIS BODs.

For more information on the Open Applications Group's BODs and related documentation please refer to the Open Applications Group's Web site at (www.openapplications.org).

Schema Field Usage


STAR uses the same Noun in the schema for all the Noun/Verb combinations of the Change Repair Order except the Get verb. Please refer to each Noun/Verb combination within this document to understand the requirements for each specific BOD. Although the Noun will always have every field defined for the Noun in the schema, each Noun/Verb combination may not use all of the fields. If a field is not used by a BOD, it will be noted in the business rules.

Business Scenario

The Repair Order Binary Collaboration starts with the sending of Vehicle Service information from the Dealer to the OEM. This process occurs on demand as is needed. Note: This scenario is an example of how the Financial Statement BOD can be used. Implementations may vary.

Relationship Diagram

The following is a representation of the Noun for this BOD. It is a high level overview provided to give an idea of the hierarchy of the Noun's components.

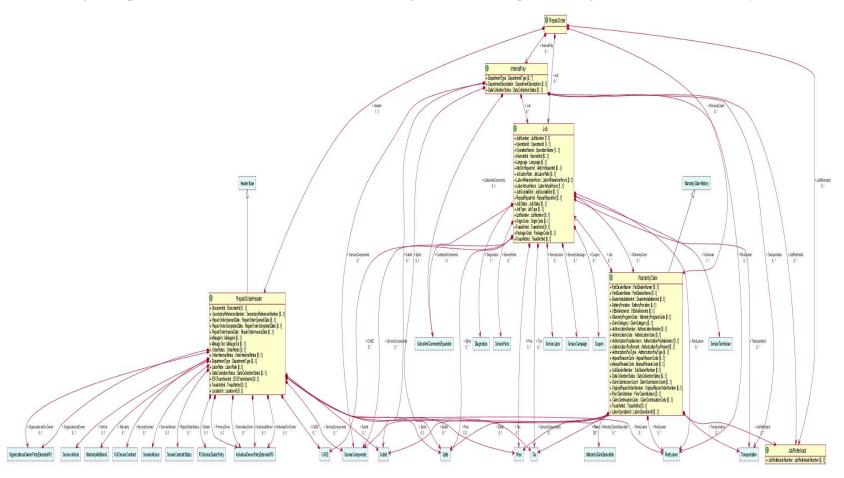

Schema Document Properties

Declared Namespaces

A schema can contain more than one namespace. According to Whatis.com, "In general, a namespace uniquely identifies a set of names so that there is no ambiguity when objects having different origins but the same names are mixed together." An example would be two namespaces that both defined an element called ID, without a namespace it would be impossible to determine which definition was being used.

Prefix	Namespace
Default namespace	http://www.starstandards.org/STAR
xml	http://www.w3.org/XML/1998/namespace
xsd	http://www.w3.org/2001/XMLSchema

Components and Data Types

Global definitions include components, code lists, and data types. Components are used to build the data structures that make up a Noun and it's requirements. Data types specify the type of data that a component's fields may contain. Not all definitions are included in this documentation. Please see either the STAR Code List guideline or Data Type Guidelines for further information.

Address

Name	Address
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
qualifier		R	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
AddressLine	Indicates the multiple lines of an address. The first line is typically the street name and number.	R	
City	Is the City of the Address.	R	
County	County in which the Address is in.	O	
StateOrProvince	Is the State or Province of a given Address.	R	
Country	Country in which the Address is in.	R	
PostalCode	Postal Code of the Address.	R	

<		
qualifier="AddressQualifier [01]">		

```
<AddressLine> AddressLine </AddressLine> [1..*]

<City> City </City> [1]

<County> County </County> [0..1]

<StateOrProvince> StateOrProvince </StateOrProvince> [1]

<Country> Country </Country> [1]

<PostalCode> PostalCode </PostalCode> [1]

</...>
```

AddressBase

Name	AddressBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
AddressLine	Indicates the multiple lines of an address. The first line is typically the street name and number.	R	
City	Is the City of the Address.	R	
County	County in which the Address is in.	O	
StateOrProvince	Is the State or Province of a given Address.	R	
Country	Country in which the Address is in.	R	
PostalCode	Postal Code of the Address.	R	

```
<...>
    <AddressLine> AddressLine </AddressLine> [1..*]
    <City> City </City> [1]
    <County> County </County> [0..1]
    <StateOrProvince> StateOrProvince </StateOrProvince> [1]
    <Country> Country </Country> [1]
    <PostalCode> PostalCode </PostalCode> [1]
```

</...>

AlternatePartyld

Name	AlternatePartyId	
Abstract	no no	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Id	Alternate Party Identification	R	

XML Instance Representation

Amount

Based on OAGI Amount. Simple content with the currency as an attrbute

Name	Amount
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
currency		R	

```
<...
currency="Currency [1]">
    xsd:decimal
```



ApplicationArea

These field(s) use this type: **ApplicationArea.**

Name	ApplicationArea
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Sender	Identifies characteristics and control identifiers that relate to the application that created the Business Object Document. The sender area can indicate the logical location of the application and/or database server the application, and the task that was processing to create the BOD.	R r,	
CreationDateTime	is the date time stamp that the given instance of the Business Object Document was created. This date must not be modified during the life of the Business Object Document.	R	DateTime fields must be formatted as XML Schema Datetimes in UTC/GMT format without offsets. Example: 2003-11-05T13:15:30Z
Signature	If the BOD is to be signed the signature element is included, otherwise it is not. Signature supports any digital signature that maybe used by an implementation of OAGIS. The qualifying Agency identifies the agency that provided the format for the signature. This element supports any digital signature specification that is available today and in the future. This is accomplished by not actually defining the content but by allowing the implementation to specify the digital signature to be used via an external XML Schema namespace declaration. The Signature element is defined to have any content from any other namespace. This allows the user to carry a digital signature in the xml instance of a BOD. The choice of which digital signature to use is left up to the user and their integration needs.	g	Optional. "qualifyingAgency" attribute.

Field / Component	Description	R/O	Business Rule
BODId	The BODId provides a place to carry a Globally Unique Identifier (GUID) that will make each Business Object Document instance uniquely identifiable. This is a critical success factor to enable software developers to use the Globally Unique Identifier (GUID) to build the following services or capabilities: 1. Legally binding transactions, 2. Transaction logging, 3. Exception handling, 4. Re-sending, 5. Reporting 6. Confirmations, 7. Security.	0	
Destination	Information related to the receiver of the BOD	R	

XML Instance Representation

AuthorizationPayMaximum

These field(s) use this type: **AuthorizationPayMaximum.**

Maximum Price covered by Authorization

Name	AuthorizationPayMaximum
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

AuthorizationPayPercent

These field(s) use this type: **AuthorizationPayPercent.**

Payment Percentage covered by Authorization

Name AuthorizationPayPercent

Abstract no

XML Instance Representation

<...>
 Percent </...>

BatteryProration

These field(s) use this type: **BatteryProration.**

Denotes life of the new battery in months

Name BatteryProration

Abstract no

XML Instance Representation

<...> Count </...>

BatteryVoltage

These field(s) use this type: **BatteryVoltage.**

Reading from a battery check service

Name BatteryVoltage

Abstract no

XML Instance Representation



BrandedInfo

These field(s) use this type: **BrandedInfo.**

Name	BrandedInfo
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
BrandedTitleInd	This tag indicates if a vehicle's title has been branded. (i.e., vehicle totaled and state registration title branded as such)	О	Values: 1 - Yes, 0 - No
BrandedTitleDate	Branding Date	О	In YYYY-MM-DD format.
BrandingStateCode	Branding State Code	О	
BrandingStateReference	Branding State Reference Number	О	
BrandingSource	Branding source $\tilde{A}\#\hat{A}\phi\hat{A}\#\hat{A}$ (i.e., source who says that the vehicle is branded)	О	

BrandingStateCode

These field(s) use this type: **BrandingStateCode.**

Branding State Code

Na	ame	BrandingStateCode
Ak	ostract	no

XML Instance Representation



BusinessObjectDocument

Name	BusinessObjectDocument
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
revision	This should contain the STAR repository version in the following recommended format. 4.2.1_M20080416. Where the first part indicates the version of the STAR repository and anything after the _ indicates the Milestone build that is being used. If referring to an official published version then only the STAR Repository version is required.	O :	
release	Indicates the OAGIS release that this BOD belongs.	О	
environment	Indicates whether this BOD is being sent in a "Test" or a "Production" mode. If the BOD is being sent in a test mode, it's information should no affect the business operation. However, if the BOD is sent in "Production" mode it is assumed that all test has been complete and the contents of the BOD are to affect the operation of the receiving business application(s).	t	

Field / Component	Description	R/O	Business Rule
lang	Indicates the language that the contents of the BOD is in unless otherwise stated.	О	
bodVersion	Deprecated as of STAR 4.2.2. It is recommended to use the revision attribute to identify the repository and the noun. May be removed in a new major version of the STAR repository. Indicates the version number of the BOD.	O r	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ApplicationArea	Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of. Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.		

XML Instance Representation

CampaignBulletinId

These field(s) use this type: **CampaignBulletinId.**

Identification of the service bulletin associated with a particular campaign

Name	CampaignBulletinId
Abstract	no

XML Instance Representation

<...> Id </...>

CampaignDescription

These field(s) use this type: **CampaignDescription.**

Service Campaign Description

Name	CampaignDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

CarrierId

These field(s) use this type: **CarrierId.**

Carrier Code

Name	CarrierId
Abstract	no

<>
Id

CASE

These field(s) use this type: **CASE,CASE.**

Name	CASE
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
CaseType	Type of Customer Arbitration Intervention or legal action	R	
CaseNumber	Case number	О	
CaseOpenDate	Case open date	0	In YYYY-MM-DD format
CaseReasonDescription	Case Reason Description	О	
CaseReasonNarrative	Case Reason Narrative	0	Examples: After Market, OEM, PrePaid
CaseOwner	Case Owner	О	

CaseReasonDescription

These field(s) use this type: **CaseReasonDescription.**

Case Reason Description

Name	CaseReasonDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

CauseDescription

These field(s) use this type: **CauseDescription.**

Dealer explanation of vehicle malfunction cause

Name	CauseDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

Change

These field(s) use this type: **Change.**

Name	Change
------	--------

Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Verb		R	

XML Instance Representation

<...
confirm="ConfirmTy

confirm="ConfirmType [0..1]"/>

ChangeRepairOrder

These field(s) use this type: **ChangeRepairOrder.**

Name	ChangeRepairOrder
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ApplicationArea	Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of. Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.	;	
DataArea		R	

ChangeRepairOrderDataArea

These field(s) use this type: **DataArea**.

Name	ChangeRepairOrderDataArea
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Change	The Change verb is used when the sender of the BOD is not the owner of the data, but is sending a request for the document to be changed. An example of this is Change REQUISITN, where the original document needs to be changed based on a specific business event.	fR	
RepairOrder		R	

XML Instance Representation

ClaimSubmissionCount

These field(s) use this type: **ClaimSubmissionCount.**

Tracks number of times claim has been submitted to manufacturer (i.e., Value will be 0 or null if claim is not ready to be sent

Name ClaimSubmissionCount

Abstract no

XML Instance Representation



CodesAndComments

These field(s) use this type: **CodesAndComments.**

Name CodesAndComments

Abstract no

Field / Component	Description	R/O	Business Rule
CauseCode	Manufacturer assigned reason the part failed	О	
CauseDescription	Dealer explanation of vehicle malfunction cause	O	
ComplaintCode	Customer complaint category	О	
ComplaintDescription	Customer explanation of vehicle malfunction	O	
CorrectionDescription	Dealer explanation of vehicle repair	О	
TechnicianNotes	Free form technician comments	O	
MiscellaneousNotes	Free form miscellaneous comments	O	
JobDenialCode	Dealer / Manufacturer defined code identifying the reason the customer denied service on a repair order line	0	

Field / Component	Description	R/O	Business Rule
JobDenialDescription	Text description of the reason a customer denied service on a repair ordeline	erO	

XML Instance Representation

CodesAndCommentsBase

Name	CodesAndCommentsBase
Abstract	no

Field / Component	Description	R/O	Business Rule
CauseCode	Manufacturer assigned reason the part failed	О	
CauseDescription	Dealer explanation of vehicle malfunction cause	О	
ComplaintCode	Customer complaint category	О	
ComplaintDescription	Customer explanation of vehicle malfunction	О	
CorrectionDescription	Dealer explanation of vehicle repair	O	
TechnicianNotes	Free form technician comments	О	

Field / Component	Description	R/O	Business Rule
MiscellaneousNotes	Free form miscellaneous comments	О	
JobDenialCode	Dealer / Manufacturer defined code identifying the reason the customer denied service on a repair order line	О	
JobDenialDescription	Text description of the reason a customer denied service on a repair orde line	rO	

XML Instance Representation

CodesAndCommentsExpanded

 $These \ field (s) \ use \ this \ type: \ \underline{\textbf{CodesAndComments,CodesAndComments.}}$

Name	CodesAndCommentsExpanded
Abstract	no

Field / Component	Description	R/O	Business Rule
CauseCode	Manufacturer assigned reason the part failed	О	
CauseDescription	Dealer explanation of vehicle malfunction cause	О	
ComplaintCode	Customer complaint category	О	

Field / Component	Description	R/O	Business Rule
ComplaintDescription	Customer explanation of vehicle malfunction	О	
CorrectionDescription	Dealer explanation of vehicle repair	O	
TechnicianNotes	Free form technician comments	O	
MiscellaneousNotes	Free form miscellaneous comments	О	
JobDenialCode	Dealer / Manufacturer defined code identifying the reason the customer denied service on a repair order line	О	
JobDenialDescription	Text description of the reason a customer denied service on a repair orde line	erO	
ComplaintPriority	Priority from customer's view for specific complaint.	O	
ComplaintCodeType	Type of problem as related to the CustomerComplaintCode.	О	
VehicleConcernQuestionAnswer	Questions and Answers related to Service Appointment	О	
DefectCode	Manufacturer assigned code that defines failed component that caused the claim	О	

XML Instance Representation

CodeType

Unique code name

Name	CodeType
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
listID		O	
listName		О	
listAgencyID		O	
listAgencyName		О	
listVersionID		О	
listURI		О	

XML Instance Representation

ComplaintDescription

These field(s) use this type: $\underline{\textbf{ComplaintDescription.}}$

Customer explanation of vehicle malfunction

Name	ComplaintDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

ConfirmableVerb

r	lame	ConfirmableVerb
4	Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
confirm		R	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Verb		R	

XML Instance Representation

```
<...
confirm="ConfirmType [0..1]"/>
```

ContactBase

Name	ContactBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Telephone	Contact telephone numbers	О	Values: Evening Phone, Day Phone, Cell Phone, Pager
			If North America telephone number, the the number must be a minum of 10 digits.
EMailAddress	Contact Email addresses	О	
Fax	Contact Fax numbers	О	Values: Home, Work
			If North America telephone number, the the number must be a minum of 10 digits.
PreferredContactMethod	Preferred contact method	O	Values: Day Phone, Evening Phone, Cell Phone, Work Fax, Home Fax, Pager, Work Email, Home Email, US Mail
ContactTime	Preferred contact time (i.e. Best day/time to reach the contact.	О	
PrimaryContactInd	Indicates if contact is primary contact	О	

XML Instance Representation

ContractDeductible

These field(s) use this type: **ContractDeductible.**

Amount of Contract Deductible

Name	ContractDeductible
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

ContractId

These field(s) use this type: **ContractId.**

Identification of Contract

Name	ContractId
Abstract	no

XML Instance Representation

```
<...>
Id
</...>
```

ContractPlanDescription

These field(s) use this type: $\underline{\textbf{ContractPlanDescription.}}$

Description of contract plan. Example: 36 MONTH/36000 MILE"

Name ContractPlanDescription	
------------------------------	--

Abstract

no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

ContractStartMileage

These field(s) use this type: **ContractStartMileage.**

Odometer reading when contract becomes effective

Abstract no

XML Instance Representation

```
<....
uom="MileageMeasure [0..1]">
Mileage
</...>
```

ContractTermMileage

These field(s) use this type: **ContractTermMileage.**

Mileage allowed under terms of contract

Name ContractTermMileage

Abstract no

XML Instance Representation

```
<...
uom="MileageMeasure [0..1]">
```

Mileage </...>

CorrectionDescription

These field(s) use this type: **CorrectionDescription.**

Dealer explanation of vehicle repair

Name CorrectionDescription
Abstract no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

Count

Simple quantity type with no attributes

Name Count
Abstract no

XML Instance Representation

```
<...>
    xsd:integer
</...>
```

Coupon

These field(s) use this type: **Coupon, Coupon.**

Name

Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
CouponId	Identification of Coupon dealership service application	О	
CouponDescription	Text identification of Coupon	О	
CouponDiscountAmount	Credit Price for coupons	О	
CouponComment	Comments associated with the coupon (e.g., Please rotate tire to front left).	О	

XML Instance Representation

CouponDescription

These field(s) use this type: **CouponDescription.**

Text identification of Coupon

Name	CouponDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

CouponDiscountAmount

These field(s) use this type: **CouponDiscountAmount.**

Credit Price for coupons

Name CouponDiscountAmount

Abstract no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

CouponId

These field(s) use this type: **CouponId.**

Identification of Coupon dealership service application

Name CouponId

Abstract no

XML Instance Representation

<...> Id </...>

CustomerMaximumAmount

These field(s) use this type: **CustomerMaximumAmount.**

Maximum Price paid by customer

Name CustomerMaximumAmount

Abstract

no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

CustomerPercent

These field(s) use this type: **CustomerPercent.**

Percentage paid by customer

Name CustomerPercent

Abstract no

XML Instance Representation

<...>
 Percent </...>

DailyRate

These field(s) use this type: **DailyRate.**

Daily rate

Name DailyRate

Abstract no

XML Instance Representation

<... currency="Currency [1]">
Amount

</...>

Damage

These field(s) use this type: **Damage.**

Name	Damage
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
AreaCode	Physical location of damage on the vehicle	O	
DamageCode	Type of damage that occurred (Ex: scratched, dented, etc)	O	
SeverityCode	Degree of damage expressed in inches	O	

XML Instance Representation

```
<...>
    <AreaCode> AreaCode </AreaCode> [0..1]
    <DamageCode> DamageCode </DamageCode> [0..1]
    <SeverityCode> SeverityCode </SeverityCode> [0..1]
    </...>
```

DealerPartyBase

Name	DealerPartyBase
Abstract	no

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	О	

Field / Component	Description	R/O	Business Rule
DealerName	Dealer name	O	
DistrictCode	Manufacturer Assigned District Code	О	
URI	Dealer URI	О	
ZoneCode	Manufacturer Assigned Zone Code	О	

XML Instance Representation

```
<...>
<PartyId> PartyId </PartyId> [0..1]
<DealerName> DealerName </DealerName> [0..1]
<DistrictCode> DistrictCode </DistrictCode> [0..1]
<URI> URI </URI> [0..1]
<ZoneCode> ZoneCode </ZoneCode> [0..1]
</...>
```

DeductibleAmount

These field(s) use this type: **DeductibleAmount.**

The Customer Deductible and/or Co/pay amount Amount. Eg:\$50.00

Name	DeductibleAmount
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

DeliveryMileage

These field(s) use this type: **DeliveryMileage.**

Odometer reading of vehicle at time of delivery

Nar	ne	DeliveryMileage
Abs	stract	no

XML Instance Representation

```
<...
uom="MileageMeasure [0..1]">
Mileage
</...>
```

DepartmentDescription

These field(s) use this type: **DepartmentDescription.**

Department Description

Name	DepartmentDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

Description

Description

Name	Description	
Abstract	no no	

Attributes

Field / Component	Description	R/O	Business Rule
language	The ISO language code that the description is written.	О	

XML Instance Representation

```
<...
language="Language [0..1]">
    xsd:string
</...>
```

Destination

These field(s) use this type: **Destination.**

Name	Destination
Abstract	no

Field / Component	Description	R/O	Business Rule
DestinationNameCode	Code for destination of file (i.e.Short Manufacturer or DSP code)	0	Must use a valid code from the ShortMfg/RSP list on http://www.starstandards.org
DestinationURI	Physical address of the destination	О	
DestinationSoftwareCode	Additional information about the destination application	О	
DestinationSoftware	For which software destination file is intended (may not be known).	О	
DealerNumber	Target Dealer Code receiving information	О	
StoreNumber	Dealer code store number (DMS assigned)	О	
AreaNumber	Dealer code area number (DMS vendor assigned)	О	
DealerCountry	Target Dealer country location	О	

Field / Component	Description	R/O	Business Rule
PartyId	The Party Id field uniquely identifies the Receiver of the message. This element can be used for parties within the Automotive Community as well as external parties. Party Id is not intended as a replacement for the Dealer Number. Suggested formats for OEMs or other large institutions include: DUNs Number, ShortMfgCode + DUNs, or ShortMfgCode. The suggested format for Dealers is: ShortMfgCode+Dealer Number.		
LocationId	The Location Id field uniquely identifies the location of the Receiver of a message. This Id may be aligned with a physical address or data centers. This field provides an additional level of granularity beyond the usage of the Party Id for additional routing and deliver of data.		
ServiceId	The Service Id field identifies the particular service to which a message is being sent, e.g., an inventory service.	О	

XML Instance Representation

Diagnostics

These field(s) use this type: **Diagnostics, Diagnostics.**

Name	Diagnostics
Abstract	no

Field / Component	Description	R/O	Business Rule
DiagnosticCodes	One or more Manufacturer Diagnostics Codes taken during the Repair Process for this job	О	
BatteryVoltage	Reading from a battery check service	0	This field is required to be populated when Warranty Coverage for Battery repair or Charging is needed.
EngineLightInd	Check engine light indicator	О	Values: 1 - Yes, 0 - No
PCMFailureCode	Powertrain Control Model failure code	О	
DiagnosticProcessCode	Specifies what diagnostic process was followed by technician	О	(INACTIVE)
DiagnosticResultType	Identifies specific result that was obtained from the diagnostic process	О	(INACTIVE)
DiagnosticResultValue	Identifies the value of the diagnostic process	О	(INACTIVE)
SymptomCode	Manufacturer-assigned code to describe how customer experiences problem	0	Please note that although the Schema shows this as an Optional field, in this BOD usage, it should be Required.
SymptomCodeDescription	Description of symptom code	0	Please note that although the Schema shows this as an Optional field, in this BOD usage, it should be Required
FailureCode	Manufacturer-assigned code to describe the reason that a fault or symptom occurred	0	Please note that although the Schema shows this as an Optional field, in this BOD usage, it should be Required
FailureCodeDescription	Description of trouble failure code	O	Please note that although the Schema shows this as an Optional field, in this BOD usage, it should be Required

Field / Component	Description	R/O	Business Rule
BatteryWarrantyCode	Warranty code generated by battery tester to define the failure type of the battery (i.e., Midtronics)	neO	
ACCompressorSerialNumber	Serial number of the AC Compressor	O	
TireTreadDepth	Depth of vehicle's tire tread	O	Please note that although the Schema shows this as an Optional field, in this BOD usage, it should be Required.

XML Instance Representation

DocumentId

These field(s) use this type: **<u>DocumentId</u>**, **<u>DocumentId</u>**.

Is the identifier for the document.

Name	DocumentId
Abstract	no

XML Instance Representation

```
<...>
    Id
</...>
```

DoorsQuantity

These field(s) use this type: **DoorsQuantity.**

Number of doors on vehicle

Name	DoorsQuantity
Abstract	no

XML Instance Representation

```
<...>
    Count
</...>
```

EngineDescription

These field(s) use this type: **EngineDescription.**

Text description of engine (e.g. dohc, 32 valves)

Name	EngineDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

ExpenseHours

These field(s) use this type: **ExpenseHours.**

Time allotted for administrative work

Name	ExpenseHours
Abstract	no

XML Instance Representation

```
<...>
Hours
</...>
```

FailureCodeDescription

These field(s) use this type: **FailureCodeDescription.**

Description of trouble failure code

Name	FailureCodeDescription
Abstract	no

XML Instance Representation

```
<... language="Language [0..1]">
    Description
</...>
```

FleetVehicleId

These field(s) use this type: **FleetVehicleId.**

Uniquely identifies the vehicle as part of a fleet company

Name	FleetVehicleId
Abstract	no

XML Instance Representation



FullServiceContract

These field(s) use this type: **ServiceContract.**

Nam	е	FullServiceContract
Abst	ract	no

Field / Component	Description	R/O	Business Rule
ContractCompanyName	Service contract company name	О	
ContractId	Identification of Service Contract	O	
ContractPlanCode	Service Contract Plan Code	О	
ContractType	Service contract type and/or area of coverage	О	
ContractPlanDescription	Description of service plan. Example: 36 MONTH/36000 MILE"	О	
Term	Number of months in contract plan	О	
ContractStartDate	Service Contract sale Date	О	
ContractDeductible	Amount of Deductible at time of service Eg:\$50.00	О	
ContractExpirationDate	Date the Service contract expires	О	
ContractStartMileage	Odometer reading when contract becomes effective	О	
ContractTermMileage	Mileage allowed under terms of service contract	О	
ContractOwnerName	Name on service Contract (i.e., full name - First Last)	О	
InsuranceCompanyName	Memo Field for carrier covering extended service contract	О	

Field / Component	Description	R/O	Business Rule
TotalContractAmount	Total amount of the service contract.	О	
ContractNote	Free form comments that relate to the contract	О	
ContractEffectiveDate	Start Date of Service Contract	О	In YYYY-MM-DD format
ContractPlanStates	States where the plan is valid	О	May occur multiple times.
ContractTransferInd	Indicates if the contract is transferable	О	Values: 1 - Yes, 0 - No
ContractTransferredInd	Indicates if the contract has been transferred	О	Values: 1 - Yes, 0 - No
ContractTripInterruptInd	Indicates if the contract allows for trip interruption	О	Values: 1 - Yes, 0 - No
LoanerVehicleInd	Service contract loaner vehicle indicator	О	Values: 1 - Yes, 0 - No
RoadsideAssistanceInd	Indicates whether coverage includes roadside assistance	О	Values: 1 - Yes, 0 - No
RoadHazardInd	Indicates whether Roadside hazard is covered in the contract	О	
FirstDayRentalInd	If first day rental for service is covered in contract	О	Values: 1 - Yes, 0 - No
RentalAllowance	Limit for Rental Allowance per day	О	Requires currency attribute
MaximumRentalAmount	Max Rental Allowance per occurrence	О	Requires currency attribute
TowingAllowance	Amount allowed for towing of RENTAL car	О	Requires currency attribute

XML Instance Representation

<...>

- </

```
<ContractType> ContractType </ContractType> [0..1]
 <ContractPlanDescription> ContractPlanDescription </ContractPlanDescription> [0..1]
 <Term> Term </Term> [0..1]
 <ContractStartDate> ContractStartDate </ContractStartDate> [0..1]
 <ContractDeductible> ContractDeductible </ContractDeductible> [0..1]
 <ContractExpirationDate> ContractExpirationDate </ContractExpirationDate> [0..1]
 <ContractStartMileage> ContractStartMileage </ContractStartMileage> [0..1]
 <ContractTermMileage> ContractTermMileage> [0..1]
 <ContractOwnerName> ContractOwnerName </ContractOwnerName> [0..1]
 <InsuranceCompanyName> InsuranceCompanyName </InsuranceCompanyName> [0..1]
 <TotalContractAmount> TotalContractAmount </TotalContractAmount> [0..1]
 <ContractNote> ContractNote </ContractNote> [0..1]
 <ContractEffectiveDate> ContractEffectiveDate /ContractEffectiveDate> [0..1]
 <ContractPlanStates> ContractPlanStates </ContractPlanStates> [0..*]
 <ContractTransferInd> ContractTransferInd </ContractTransferInd> [0..1]
 <ContractTransferredInd> ContractTransferredInd </ContractTransferredInd> [0..1]
 <ContractTripInterruptInd> ContractTripInterruptInd 
 <LoanerVehicleInd> LoanerVehicleInd </LoanerVehicleInd> [0..1]
 <RoadsideAssistanceInd> RoadsideAssistanceInd </RoadsideAssistanceInd> [0..1]
 <RoadHazardInd>RoadHazardInd</RoadHazardInd>[0..1]
 <FirstDayRentalInd> FirstDayRentalInd /FirstDayRentalInd> [0..1]
 <RentalAllowance> RentalAllowance </RentalAllowance> [0..1]
 <MaximumRentalAmount> MaximumRentalAmount /MaximumRentalAmount> [0..1]
 <TowingAllowance> TowingAllowance </TowingAllowance> [0..1]
</...>
```

Goodwill

These field(s) use this type: **Goodwill.**

Represents the good will re-embursement percentages allowed.

Name	Goodwill
Abstract	no

Field / Component	Description	R/O	Business Rule
PartsCostPercent	Percentage of part cost to be paid by manufacturer as goodwill for this job.	О	
LaborCostPercent	Percentage of labor cost to be paid by manufacturer as goodwill for this job.	0	
SubletPartsCostPercent	Percentage of sublet parts cost to be paid by manufacturer as goodwill for this job.	0	
SubletLaborCostPercent	Percentage of sublet labor cost to be paid by manufacturer as goodwill for this job.	0	

XML Instance Representation

HandlingAmount

These field(s) use this type: **HandlingAmount.**

Handling Amount

Name	HandlingAmount
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

HeaderBase

Used on all STAR BODs

Name	HeaderBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
DocumentDateTime	Is the date and time the document was last created. This is not the date and time that the BOD message instance was created.	О	
SecondaryPassword	Secondary password used to validate access to the dealer information	O	
SecondaryDealerNumber	Identifies secondary dealer number if different than primary "Dealer Number"	О	

XML Instance Representation

Hours

Hours

Name	Hours
Abstract	no

XML Instance Representation

```
<...>
    xsd:decimal
</...>
```

ld

These field(s) use this type: **AuthorizationId,Id.**

Party Identification number

Name Id
Abstract no

XML Instance Representation

<...>
xsd:string
</...>

IndividualOwnerParty

Name	IndividualOwnerParty
Abstract	no

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	O	
AlternatePartyIds	Individual party alternate party Identification	O	
PersonName	Individual party name	O	
Address	Individual party address	O	
Contact	Individual party contact information	O	
RelationshipCode	Indicates the Business PartyÃ#¢Â#Â#s relationship to the primary Party (e.g., mother, father, husband, etc.)l	О	

XML Instance Representation

IndividualOwnerPartyExtended

Name	IndividualOwnerPartyExtended
Abstract	no

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	О	
AlternatePartyIds	Individual party alternate party Identification	О	
PersonName	Individual party name	O	
Address	Individual party address	O	
Contact	Individual party contact information	О	
RelationshipCode	Indicates the Business PartyÃ#¢Â#Â#s relationship to the primary Party (e.g., mother, father, husband, etc.)l	О	
Demographics	Individual party demographic information	O	
MarketingMailInd	Indicates customers whom have requested no marketing mail	О	
PrimaryDriverInd	Identifies customer as primary driver	О	
DriverAction	Driver action (Ex: Drop-Off, Pick-Up, etc)	О	

XML Instance Representation

IndividualOwnerPartyExtendedRO

These field(s) use this type: <u>IndividualOwner,IndividualCo-Owner,PrimaryDriver,SecondaryDriver</u>.

Name	IndividualOwnerPartyExtendedRO
Abstract	no

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	О	
AlternatePartyIds	Individual party alternate party Identification	О	
PersonName	Individual party name	О	
Address	Individual party address	О	
Contact	Individual party contact information	О	
RelationshipCode	Indicates the Business Party \tilde{A} # \hat{A} ¢ \hat{A} # \hat{A} #s relationship to the primary Party (e.g., mother, father, husband, etc.)l	О	
Demographics	Individual party demographic information	О	

Field / Component	Description	R/O	Business Rule
MarketingMailInd	Indicates customers whom have requested no marketing mail	О	
PrimaryDriverInd	Identifies customer as primary driver	О	
DriverAction	Driver action (Ex: Drop-Off, Pick-Up, etc)	О	
CustomerChangeInd	Indicates whether customer information has changed	0	(INACTIVE)
DataCollectionStatus	Indicates status of data for the record it appears on , either complete or incomplete	О	(INACTIVE)

XML Instance Representation

IndividualPartyAddress

These field(s) use this type: **Address.**

Name	IndividualPartyAddress
Abstract	no

Field / Component	Description	R/O	Business Rule
AddressLine	Indicates the multiple lines of an address. The first line is typically the street name and number.	R	
City	Is the City of the Address.	R	
County	County in which the Address is in.	O	
StateOrProvince	Is the State or Province of a given Address.	R	
Country	Country in which the Address is in.	R	
PostalCode	Postal Code of the Address.	R	
UrbanizationCode	Geographic definition of a metropolitan or suburban area	0	

XML Instance Representation

IndividualPartyAlternatePartyId

These field(s) use this type: **AlternatePartyIds.**

Name	IndividualPartyAlternatePartyId
Abstract	no

Field / Component	Description	R/O	Business Rule
Id	Alternate Party Identification	R	
AssigningPartyId	Agency or entity that validates the Party Id	R	
IssuingState	Indicates that State where the license was issued.	O	
ExpirationDate	Expiration date of the alternate party id (e.g., Driver's License expiration date).	О.	

XML Instance Representation

```
<...>
<Id> Id </Id> [1]
<AssigningPartyId > AssigningPartyId </AssigningPartyId> [1]
<IssuingState> IssuingState </IssuingState> [0..1]
<ExpirationDate> ExpirationDate </ExpirationDate> [0..1]
</...>
```

IndividualPartyBase

Name	IndividualPartyBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	О	
AlternatePartyIds	Individual party alternate party Identification	O	
PersonName	Individual party name	O	
Address	Individual party address	0	

XML Instance Representation



```
<PartyId> PartyId </PartyId> [0..1]
  <AlternatePartyIds> IndividualPartyAlternatePartyId </AlternatePartyIds> [0..*]
  <PersonName> IndividualPartyPersonName </PersonName> [0..1]
  <Address> IndividualPartyAddress </Address> [0..*]
  </...>
```

IndividualPartyContact

These field(s) use this type: **Contact.**

N	ame	IndividualPartyContact
Δ	bstract	no

Field / Component	Description	R/O	Business Rule
Telephone	Contact telephone numbers	О	Values: Evening Phone, Day Phone, Cell Phone, Pager
			If North America telephone number, the the number must be a minum of 10 digits.
EMailAddress	Contact Email addresses	О	
Fax	Contact Fax numbers	О	Values: Home, Work
			If North America telephone number, the the number must be a minum of 10 digits.
PreferredContactMethod	Preferred contact method	O	Values: Day Phone, Evening Phone, Cell Phone, Work Fax, Home Fax, Pager, Work Email, Home Email, US Mail
ContactTime	Preferred contact time (i.e. Best day/time to reach the contact.	О	
PrimaryContactInd	Indicates if contact is primary contact	О	
PersonName	Contact name	О	
Published by Standards for Tochnole	aguin Automotivo Potail @ 2006		50

XML Instance Representation

IndividualPartyContactEMail

These field(s) use this type: **EMailAddress**.

Individual Party email

Name	IndividualPartyContactEMail
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
desc		R	

XML Instance Representation

```
<...
desc="HomeWork [0..1]">
        xsd:string
</...>
```

IndividualPartyContactFax

These field(s) use this type: \underline{Fax} .

Individual Party Fax number

Na	ime	IndividualPartyContactFax
Ab	stract	no

Attributes

Field / Component	Description	R/O	Business Rule
desc		R	

XML Instance Representation

Individual Party Contact Telephone Number

These field(s) use this type: **Telephone.**

IndividualParty telephone number

Name	IndividualPartyContactTelephoneNumber
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
desc		R	
exten		R	

XML Instance Representation

<....

```
desc="ContactTelephoneNumberDescription [0..1]"
exten="Note [0..1]">
    xsd:string
</...>
```

IndividualPartyPersonName

These field(s) use this type: **PersonName,PersonName.**

Name	IndividualPartyPersonName
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Salutation	Title or greeting of business party	О	
GivenName	First Name of business party	R	
MiddleName	Middle Initial of business party	О	
FamilyName	Last Name of business party	R	
Suffix	Business Party name suffix designation if individual Ex: Sr, Jr, III, etc.	O	
FormattedName	Full Name of business party. Format for name should be "First Last" with no commas between first and last name	О	
SortName	Index name used as a sort for report purposes	0	

```
<...>
    <Salutation> Salutation </Salutation> [0..1]
    <GivenName> GivenName </GivenName> [1]
    <MiddleName> MiddleName </MiddleName> [0..1]
    <FamilyName> FamilyName </FamilyName> [1]
    <Suffix> Suffix </Suffix> [0..1]
    <FormattedName> FormattedName </FormattedName> [0..1]
```

```
<SortName> SortName </SortName> [0..1] </...>
```

InternalMaximumAmount

These field(s) use this type: **InternalMaximumAmount.**

Maximum Price paid by internal (dealer)

Name	InternalMaximumAmount
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

InternalPay

These field(s) use this type: **InternalPay.**

Name	InternalPay
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
DepartmentType	Identifies the internal department who is paying for work	О	
DepartmentDescription	Description of the internal department(s) paying for work	O	
DataCollectionStatus	Indicates status of data for the record it appears on	О	(INACTIVE)
CodesAndComments	Codes and Comments related to Internal Pay	О	
Splits	Internal Pay Splits total	O	

Field / Component	Description	R/O	Business Rule
RentLoaner	Rent Loaner related to Internal Pay	О	(INACTIVE)
ServiceComponents	Service Components related to Internal Pay	О	
Transportation	Transportation related to Internal Pay	О	(INACTIVE)
Sublet	Sublet related to Internal Pay	O	
Job	Jobs related to Internal Pay	O	
JobReferback	Job Referback related to Internal Pay	О	(INACTIVE)

XML Instance Representation

InternalPercent

These field(s) use this type: **InternalPercent.**

Percentage paid by internal (dealer)

Name	InternalPercent
Abstract	no

XML Instance Representation

```
<...>
    Percent
</...>
```

ItemId

These field(s) use this type: **ItemId,ItemId.**

Item part number

Name	ItemId
Abstract	no

XML Instance Representation

```
<...>
    Id
</...>
```

ItemIdDescription

These field(s) use this type: **<u>ItemIdDescription.</u>**

Item part number detail description

Name	ItemIdDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

ItemQuantity

These field(s) use this type: <u>ItemQuantity,ItemQuantity.</u>

Quantity of Part number.

Name ItemQuantity

Abstract no

XML Instance Representation

```
<...
uom="UOM [1]">
Quantity
</...>
```

Job

These field(s) use this type: **Job,Job,Job.**

Name Job Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
JobNumber	DMS assigned job or line identification number	R	
OperationId	Dealer or DMS assigned operation code identifier	R	
OperationName	Dealer or DMS assigned operation description	R	
CodesAndComments	Codes and comments related to job	R	
Diagnostics	Diagnostics from vehicle service associated with job	R	
ServiceParts	Parts used on job	O	
ServiceLabor	Labor used on job	O	
CASE	Customer arbitration information associated with job	О	(INACTIVE)

Field / Component	Description	R/O	Business Rule
WarrantyClaim	Warranty Claim information related to job	O	You can use WarrantyClaim on Job or Job on WarrantyClaim but as a Best Practice you shouldn't use both on the same RepairOrder.
HazmatInd	Indicator that Hazmat Was Used and Disposed Of as Part of the Repair	О	Values: 1 - Hazmat was used. 0 - Hazmat was not used.
Language	This code is used to define the language of the data used in this transaction	0	(INACTIVE)
AddOnRepairInd	AddOnRepairInd	O	Values: 0 - not an add on, 1 - Add on Repair
JobLaborRate	The actual labor rate for this job only, typically the posted rate	О	
Price	The actual labor rate for this job only, typically the posted rate	О	See price component for values.
			Total sales portion based for the values specified for the Job. (i.e. GasOilGrease, Job, etc).
LaborAllowanceHours	Manufacturer approved billable flat rate hours	О	
LaborActualHours	Actual hours required to complete job	R	
JobGoodwillInd	Indicates if Dealer Goodwill has been applied to this job (complete or partial)	0	(INACTIVE)
RepeatRepairInd	Identifies repair as having been performed previously on the vehicle	O	(INACTIVE)
JobStatus	Status of Job (Ex: Complete, Incomplete)	О	(INACTIVE)
JobType	Type of service performed (special policy, warranty pay, etc)	О	
ListNumber	Identifies the weekly statement where the condition will be listed as paid	d.O	(INACTIVE)

Field / Component	Description	R/O	Business Rule
OriginCode	Indicates source of repair order- Examples: D - Dealer Entered; T $\tilde{A}\#\hat{A}\phi\hat{A}\#\hat{A}$ Teleservice; K - Key Reader	0	(INACTIVE)
RentLoaner	Rent Loaner associated with job	О	(INACTIVE)
ServiceCampaign	Service Campaign (Recall) associated with job	О	(INACTIVE)
Coupon	Coupons associated with job	О	(INACTIVE)
Technician	Technicians associated with job	R	
ServiceComponents	Service Components associated with job	O	
Splits	Splits associated with job	O	
Transportation	Transportation associated with job	О	(INACTIVE)
Тах	Tax associated with job	О	
TowedInInd	Indicates that this job led to the need to have this car towed in	О	
PackageCode	Indicates multiple labor operations within a package (e.g., 30k mileag drive train or emissions package).	ge O	
TreadActInd	Transportation Recall Enhancement, Accountability, and Documentat (TREAD) Act (i.e., - Indicates if there has been fire damage)	cion O	Values: 1 - Yes, 0 - No
Goodwill	Information regarding goodwill provided by the manufacturer	О	

```
<...>

<JobNumber> JobNumber 
JobNumber> [1]
<OperationId> OperationId </OperationName> [1]
<OperationName> OperationName </OperationName> [1]
<CodesAndComments> CodesAndCommentsExpanded </CodesAndComments> [1]
<Diagnostics> Diagnostics </Diagnostics> [1..*]
<ServiceParts> ServiceParts </ServiceParts> [0..*]
```

```
<ServiceLabor> ServiceLabor [0..*]
 <CASE> CASE </CASE> [0..*]
 < Warranty Claim > Warranty Claim > [0..*]
 < HazmatInd > HazmatInd < / HazmatInd > [0..1]
 <Language> Language </Language> [0..1]
 <AddOnRepairInd> AddOnRepairInd </AddOnRepairInd> [0..1]
 <JobLaborRate> JobLaborRate </JobLaborRate> [0..1]
 <Price> Price </Price> [0..*]
 <LaborAllowanceHours> LaborAllowanceHours </LaborAllowanceHours> [0..1]
 <LaborActualHours> LaborActualHours </LaborActualHours> [1]
 <JobGoodwillInd> JobGoodwillInd </JobGoodwillInd> [0..1]
 <RepeatRepairInd> RepeatRepairInd </RepeatRepairInd> [0..1]
 <JobStatus> JobStatus </JobStatus> [0..1]
 <JobType> JobType </JobType> [0..1]
 <ListNumber> ListNumber </ListNumber> [0..1]
 <OriginCode> OriginCode </OriginCode> [0..1]
 <RentLoaner> RentLoaner </RentLoaner> [0..*]
 <ServiceCampaign> ServiceCampaign </ServiceCampaign> [0..*]
 <Coupon> Coupon </Coupon> [0..*]
 <Technician> ServiceTechnician </Technician> [1..*]
 <ServiceComponents> ServiceComponents </ServiceComponents> [0..*]
 <Splits> Splits </Splits> [0..*]
 <Transportation> Transportation </Transportation> [0..*]
 <Tax> Tax</Tax> [0..*]
 <TowedInInd> TowedInInd </TowedInInd> [0..1]
 <PackageCode> PackageCode </PackageCode> [0..1]
 <TreadActInd> TreadActInd </TreadActInd> [0..1]
 <Goodwill> Goodwill </Goodwill> [0..1]
</...>
```

JobDenialDescription

These field(s) use this type: **JobDenialDescription**.

Text description of the reason a customer denied service on a repair order line

Name	JobDenialDescription
------	----------------------

Abstract no

XML Instance Representation

```
<...
language="Language [0..1]">
    Description
</...>
```

JobLaborRate

These field(s) use this type: **JobLaborRate.**

The actual labor rate for this job only, typically the posted rate

Name JobLaborRate

Abstract no

XML Instance Representation

```
<...
currency="Currency [1]">
    LaborRate
</...>
```

JobReferback

These field(s) use this type: $\underline{\textbf{JobReferback,JobReferback,JobReferback.}}$


Name JobReferback

Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
JobReferbackNumber	Refer-back to a job that has already appeared within the same "pay-group" presently being processed (Customer, Claims or Internal Pay)	O	

XML Instance Representation



LaborActualHours

These field(s) use this type: **LaborActualHours,LaborActualHours.**

Actual hours required to complete job

Name	LaborActualHours
Abstract	no

XML Instance Representation



LaborAdditionalHours

These field(s) use this type: $\underline{\textbf{LaborAdditionalHours.}}$

Additional labor hours above flat rate allowance

Name	LaborAdditionalHours
Abstract	no



Hours </...>

LaborAllowanceHours

These field(s) use this type: <u>LaborAllowanceHours</u>,<u>LaborAllowanceHours</u>.

Flat rate labor hour allowance for this operation

Name LaborAllowanceHours

Abstract no

XML Instance Representation



LaborCostPercent

These field(s) use this type: **LaborCostPercent.**

Percentage of labor cost to be paid by manufacturer as goodwill for this job.

Name LaborCostPercent

Abstract no

XML Instance Representation

<...>
 Percent </...>

LaborNarrative

These field(s) use this type: **LaborNarrative.**

Name LaborNarrative

Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
NarrativeType	Defines the Type of Labor Narrative/Comment like 'RL' - Recall comment, 'ML' etc.,	О	
Narrative	Labor Comment/Narrative can occur multiple times for each Labor depending on LaborNarrative type	О	May occur multiple times

XML Instance Representation

```
<...>
    <NarrativeType> NarrativeType </NarrativeType> [0..1]
    <Narrative> Narrative </Narrative> [0..*]
    </...>
```

LaborOperationDescription

These field(s) use this type: **<u>LaborOperationDescription.</u>**

Description of a particular operation code

Name	LaborOperationDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

LaborOperationId

These field(s) use this type: **<u>LaborOperationId</u>**.

Currently assigned code for this operation (preferably manufacturer code)

Name LaborOperationId

Abstract no

XML Instance Representation

<...> Id </...>

LaborOperationQuantity

These field(s) use this type: **LaborOperationQuantity.**

Number of times this operation was performed for this labor line

Name LaborOperationQuantity

Abstract no

XML Instance Representation

<...> Count </...>

LaborRate

These field(s) use this type: <u>LaborRate,LaborRate,LaborRate</u>.

Dealer Posted Hourly Retail Labor Rate

Name LaborRate

Abstract no

XML Instance Representation

<...

```
currency="Currency [1]">
Amount
</...>
```

LocationId

These field(s) use this type: **LocationId,LocationId.**

Code identifying a physical location

Name	LocationId
Abstract	no

XML Instance Representation



MarkupPercentage

These field(s) use this type: **MarkupPercentage.**

Dealer submitted part markup percentage

Name	MarkupPercentage
Abstract	no

XML Instance Representation



MaximumRentalAmount

These field(s) use this type: **MaximumRentalAmount.**

Max Rental Allowance per occurrence

Name	MaximumRentalAmount
------	---------------------

Abstract no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

Measurement

Decimal measurement

Abstract no

XML Instance Representation

```
<...>
xsd:decimal
</...>
```

Mileage

Mileage definition

Name	Mileage
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
uom		O	

XML Instance Representation

```
<...
uom="MileageMeasure [0..1]">
Count
</...>
```

MileageIn

These field(s) use this type: MileageIn.

Odometer reading of vehicle when repair order was opened

Name	Mileageln
Abstract	no

XML Instance Representation

```
<...
uom="MileageMeasure [0..1]">
Mileage
</...>
```

MileageOut

These field(s) use this type: MileageOut.

Odometer reading of vehicle when repair order was closed

Name	MileageOut
Abstract	no

```
<...
uom="MileageMeasure [0..1]">
Mileage
</...>
```

MinimalDemographics

These field(s) use this type: **Demographics.**

Name	MinimalDemographics
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Gender	Gender of party	O	Values: M - Male, F - Female
Language	Business party native language	O	Reference Language Enumerator
BirthDate	Birth date of party	О	In YYYY-MM-DD format

XML Instance Representation

```
<...>
<Gender> Gender </Gender> [0..1]
<Language> Language </Language> [0..1]
<BirthDate> BirthDate </BirthDate> [0..1]
</...>
```

NonTaxableAmount

These field(s) use this type: **NonTaxableAmount, NonTaxableAmount.**

Total non-taxable price.

Name	NonTaxableAmount
Abstract	no

```
<...
currency="Currency [1]">
Amount
</...>
```

OperationId

These field(s) use this type: **OperationId.**

Dealer or DMS assigned operation code identifier

Name	OperationId
Abstract	no

XML Instance Representation

```
<...>
    Id
</...>
```

OperationName

These field(s) use this type: **OperationName.**

Dealer or DMS assigned operation description

Name	OperationName
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
   Description
</...>
```

OptionBase

Name	OptionBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
OptionType	An option type for a vehicle or other component. Usually references an OEM supplied list of codes.	О	
OptionName	Name of vehicle option	О	
OptionStockNumber	Stock Number of Vehicle Option	O	
Manufacturer	Manufacturer of Vehicle Option	O	

XML Instance Representation

OptionType

These field(s) use this type: **OptionType.**

Option Type from an OEM or other sources list of codes.

Name	OptionType
Abstract	no

```
<...
listID="xsd:token [0..1]"
listName="xsd:string [0..1]"
```

```
listAgencyID="xsd:token [0..1]"
listAgencyName="xsd:string [0..1]"
listVersionID="xsd:token [0..1]"
listURI="xsd:anyURI [0..1]">
CodeType
</...>
```

OrganizationAddress

These field(s) use this type: **Address.**

Name	OrganizationAddress
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
AddressLine	Indicates the multiple lines of an address. The first line is typically the street name and number.	R	
City	Is the City of the Address.	R	
County	County in which the Address is in.	О	
StateOrProvince	Is the State or Province of a given Address.	R	
Country	Country in which the Address is in.	R	
PostalCode	Postal Code of the Address.	R	
UrbanizationCode	Geographic definition of a metropolitan or suburban area	О	

```
<...>
    <AddressLine> AddressLine </AddressLine> [1..*]
    <City> City </City> [1]
    <County> County </County> [0..1]
```

```
<StateOrProvince> StateOrProvince </StateOrProvince> [1]
  <Country> Country </Country> [1]
  <PostalCode> PostalCode </PostalCode> [1]
  <UrbanizationCode> UrbanizationCode </UrbanizationCode> [0..1]
  </...>
```

OrganizationalOwnerParty

Name	OrganizationalOwnerParty
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	O	
AlternatePartyIds	Alternate organizational party Identification	O	
Name	Company name of organizational party	O	
Address	Organizational Party address	О	
DBAName	Doing Business As name.	О	
Contact	Organizational Party contact information	O	
RelationshipCode	Indicates the Business Party \tilde{A} # \hat{A} ¢ \hat{A} # \hat{A} #s relationship to the primary Party (e.g., mother, father, husband, etc.)l	О	

```
<...>
    <PartyId> PartyId </PartyId> [0..1]
    <AlternatePartyIds> OrganizationalPartyAlternatePartyId </AlternatePartyIds> [0..*]
    <Name> CompanyName </Name> [0..1]
    <Address> OrganizationAddress </Address> [0..1]
    <DBAName> DBAName </DBAName> [0..1]
    <Contact> OrganizationContactExtended </Contact> [0..1]
```

```
<RelationshipCode> RelationshipCode </RelationshipCode> [0..1] </...>
```

${\bf Organizational Owner Party Extended}$

Name	OrganizationalOwnerPartyExtended
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	O	
AlternatePartyIds	Alternate organizational party Identification	O	
Name	Company name of organizational party	О	
Address	Organizational Party address	О	
DBAName	Doing Business As name.	О	
Contact	Organizational Party contact information	О	
RelationshipCode	Indicates the Business Party \tilde{A} # \hat{A} ¢ \hat{A} # \hat{A} #s relationship to the primary Party (e.g., mother, father, husband, etc.)l	О	
MarketingMailInd	Indicates customers whom have requested no marketing mail	O	
PrimaryDriverInd	Identifies customer as primary driver	O	
DriverAction	Driver action (Ex: Drop-Off, Pick-Up, etc)	О	

```
<...>
    <PartyId> PartyId </PartyId> [0..1]
    <AlternatePartyIds> OrganizationalPartyAlternatePartyId </AlternatePartyIds> [0..*]
    <Name> CompanyName </Name> [0..1]
    <Address> OrganizationAddress </Address> [0..1]
```

```
<DBAName> DBAName </DBAName> [0..1]
  <Contact> OrganizationContactExtended </Contact> [0..1]
  <RelationshipCode> RelationshipCode </RelationshipCode> [0..1]
  <MarketingMailInd> MarketingMailInd </MarketingMailInd> [0..1]
  <PrimaryDriverInd> PrimaryDriverInd </PrimaryDriverInd> [0..1]
  <DriverAction> DriverAction </DriverAction> [0..1]
</...>
```

OrganizationalOwnerPartyExtendedRO

These field(s) use this type: **OrganizationalOwner,OrganizationalCo-Owner.**

Name	OrganizationalOwnerPartyExtendedRO
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	О	
AlternatePartyIds	Alternate organizational party Identification	О	
Name	Company name of organizational party	О	
Address	Organizational Party address	О	
DBAName	Doing Business As name.	О	
Contact	Organizational Party contact information	О	
RelationshipCode	Indicates the Business PartyÃ#¢Â#Â#s relationship to the primary Party (e.g., mother, father, husband, etc.)l	О	
MarketingMailInd	Indicates customers whom have requested no marketing mail	О	
PrimaryDriverInd	Identifies customer as primary driver	О	
DriverAction	Driver action (Ex: Drop-Off, Pick-Up, etc)	О	
CustomerChangeInd	Indicates whether customer information has changed	0	(INACTIVE)

Field / Component	Description	R/O	Business Rule
DataCollectionStatus	Indicates status of data for the record it appears on , either complete or incomplete	О	(INACTIVE)

XML Instance Representation

OrganizationalPartyAlternatePartyId

These field(s) use this type: <u>AlternatePartyIds,AlternatePartyIds</u>.

Name	OrganizationalPartyAlternatePartyId
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Id	Alternate Party Identification	R	
AssigningPartyId	Agency or entity that validates the Party Id	R	
IssuingState	Indicates that State where the license was issued.	О	

Field / Component	Description	R/O	Business Rule
ExpirationDate	Expiration date of the alternate party id (e.g., Driver's License expiration date).	ı O	

XML Instance Representation

```
<...>
    <Id> Id </Id> [1]
    <AssigningPartyId> AssigningOrganizationPartyId </AssigningPartyId> [1]
    <IssuingState> IssuingState </IssuingState> [0..1]
    <ExpirationDate> ExpirationDate </ExpirationDate> [0..1]
    </...>
```

OrganizationContact

Nan	ne	OrganizationContact
Abs	stract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PersonName	Contact name	О	
Telephone	Contact telephone numbers	O	
EMailAddress	Contact Email address	O	
Fax	Contact Fax number	O	
PreferredContactMethod	Preferred contact method	O	
ContactTime	Preferred contact time (i.e. Best day/time to reach the contact.	О	

```
<...>
<PersonName> OrganizationContactPersonName </PersonName> [0..1]
<Telephone> OrganizationPartyTelephone </Telephone> [0..*]
```

```
<EMailAddress> OrganizationPartyEmail </EMailAddress> [0..*]
<Fax> OrganizationPartyFax </Fax> [0..*]
<PreferredContactMethod> PreferredContactMethodOrganization </PreferredContactMethod> [0..1]
<ContactTime> ContactTime </ContactTime> [0..1]
</...>
```

OrganizationContactExtended

These field(s) use this type: **Contact.**

Name	OrganizationContactExtended
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PersonName	Contact name	О	
Telephone	Contact telephone numbers	O	
EMailAddress	Contact Email address	O	
Fax	Contact Fax number	O	
PreferredContactMethod	Preferred contact method	О	
ContactTime	Preferred contact time (i.e. Best day/time to reach the contact.	O	
PreferredLanguage	Organization's preferred language	О	

```
<ContactTime> ContactTime </ContactTime> [0..1]
<PreferredLanguage> PreferredLanguage </PreferredLanguage> [0..1]
</...>
```

OrganizationContactPersonName

These field(s) use this type: **PersonName.**

Derived from oa:PersonName

Name	OrganizationContactPersonName
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
GivenName	First Name of business party	R	
FamilyName	Last Name of business party	R	
FormattedName	Full Name of business party. Format for name should be "First Last" with no commas between first and last name	О	

XML Instance Representation

```
<...>
    <GivenName> Name </GivenName> [1]
    <FamilyName> Name </FamilyName> [1]
    <FormattedName> Name </FormattedName> [0..1]
    </...>
```

OrganizationPartyBase

Name	OrganizationPartyBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O Business Rule
PartyId	Party Identification Number	O
AlternatePartyIds	Alternate organizational party Identification	0
Name	Company name of organizational party	0
Address	Organizational Party address	0
DBAName	Doing Business As name.	0

XML Instance Representation

```
<-...>
    <PartyId> PartyId </PartyId> [0..1]
    <AlternatePartyIds> OrganizationalPartyAlternatePartyId </AlternatePartyIds> [0..*]
    <Name> CompanyName </Name> [0..1]
    <Address> OrganizationAddress </Address> [0..1]
    <DBAName> DBAName </DBAName> [0..1]
    </...>
```

OrganizationPartyEmail

These field(s) use this type: **EMailAddress.**

Organization email

Name	OrganizationPartyEmail
Abstract	no

XML Instance Representation

```
<...>
    xsd:string
</...>
```

OrganizationPartyFax

These field(s) use this type: **Fax.**

OrganizationFax number

OrganizationPartyFax
(

Abstract no

XML Instance Representation

```
<...>
xsd:string
</...>
```

OrganizationPartyTelephone

These field(s) use this type: **Telephone.**

OrganizationParty telephone number

Name	OrganizationPartyTelephone
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
desc		R	
exten		R	

```
<...

desc="ContactTelephoneNumberOrganizationDescription [0..1]"

exten="Note [0..1]">
    xsd:string

</...>
```

PartDealerNumer

These field(s) use this type: **PartDealerNumer.**

Identification number for party that installed part

Name	PartDealerNumer PartDealerNumer
Abstract	no

XML Instance Representation

```
<...>
Id
</...>
```

PartMaximumAmount

These field(s) use this type: **PartMaximumAmount.**

Total Amount of part allowance

ı	Name	PartMaximumAmount PartMaximumAmount
/	Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

PartNameCode

These field(s) use this type: **PartNameCode.**

Part identifier which is comprised of a system and component code

Name	PartNameCode PartNameCode
------	---------------------------

Abstract no

XML Instance Representation

<...> Id </...>

PartNameCodeDescription

These field(s) use this type: **PartNameCodeDescription.**

Description of Part identifier (PNC) that caused the failure

Name PartNameCodeDescription
Abstract no

XML Instance Representation

<... language="Language [0..1]">
 Description
</...>

PartsCostPercent

These field(s) use this type: **PartsCostPercent.**

Percentage of part cost to be paid by manufacturer as goodwill for this job.

Name PartsCostPercent
Abstract no

XML Instance Representation

<...>
 Percent
</...>

PartyBase

Derived from oa:Party

Nar	me	PartyBase
Abs	stract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	О	

XML Instance Representation

```
<...>
<PartyId> PartyId </PartyId> [0..1]
</...>
```

Partyld

These field(s) use this type: **<u>DealerNumber,PartyId,DealerNumber,PartyId,PartyId.</u>**

Party Identification Number

Name	Partyld
Abstract	no

XML Instance Representation



Percent

Percent

Name Percent
Abstract no

XML Instance Representation

PreAdjustmentAmount

These field(s) use this type: **PreAdjustmentAmount.**

Total amount derived before the application of tax. (i.e., Dealership's Part Adjustment Amount)

Name PreAdjustmentAmount
Abstract no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

Price

These field(s) use this type: **Price,Price,Price,Price,Price,Price,Price,Price,Price**

Name Price
Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PriceType	Identifies the price type	R	

Field / Component	Description	R/O	Business Rule
TaxableAmount	Total Taxable Price	O	
NonTaxableAmount	Total non-taxable price.	O	
TotalAmount	Total price (cost + markup)	O	
UnitPrice	UnitPrice	O	
TotalCost	Value at unit cost times quantity	O	
UnitCost	Cost at inventory value	O	
PriceExplanation	Explanatory Note for Pricing	O	

XML Instance Representation

Quantity

A decimal value with uom

Name	Quantity
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
uom		R	

XML Instance Representation

RentalAllowance

These field(s) use this type: **RentalAllowance.**

Limit for Rental Allowance per day

Name	RentalAllowance
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

RentDaysQuantity

These field(s) use this type: **RentDaysQuantity.**

Number of days rental/loaner was out

Name	RentDaysQuantity
Abstract	no



RentLoaner

These field(s) use this type: **RentLoaner,RentLoaner,RentLoaner,RentLoaner,RentLoaner**.

Na	ime	RentLoaner
Ak	stract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
VIN	Rental Loaner Vehicle Identification Number	O	
RentDaysQuantity	Number of days rental/loaner was out	O	
RentOutDate	Date rental/loaner vehicle provided to customer	O	
RentInDate	Date rental/loaner vehicle turned in by customer	О	
Model	Model description of rental/loaner vehicle	О	
RentNotes	Rent Loaner Comments	O	
RentLoanerCode	Identifies rental/loaner vehicle	0	Values: L - Loaner, R - Rental
RentLoanerInvoiceNumber	Rental/loaner accounting identifier - the Rental Loaner Invoice # from either the DMS or rental company	О	
Price	Total Price paid for rental/loaner Including tax	О	Values: RentLoaner
RentLoanerHours	Number of hours the rental loaner was used by the customer	О	
Make	Vehicle make code - Usually available in the VIN number (use NCIC code).	О	(INACTIVE)
DailyRate	Actual Daily rate paid for the vehicle	О	(INACTIVE)

Field / Component	Description	R/O	Business Rule
RentLoanerReasonCode	The reason code identifying the reason a rental loaner was provided	О	(INACTIVE)
Tax	Actual amount of tax paid on rentalLoaner	О	
ProviderName	Party that provided the service or vehicle	О	(INACTIVE)

XML Instance Representation

```
<...>
 <VIN> VIN </VIN> [0..1]
 <RentDaysQuantity> RentDaysQuantity </RentDaysQuantity> [0..1]
 <RentOutDate> RentOutDate </RentOutDate> [0..1]
 <RentInDate> RentInDate </RentInDate> [0..1]
 <Model> Model </Model> [0..1]
 <RentNotes> RentNotes </RentNotes> [0..1]
 <RentLoanerCode> RentLoanerCode </RentLoanerCode> [0..1]
 <RentLoanerInvoiceNumber> RentLoanerInvoiceNumber /RentLoanerInvoiceNumber> [0..1]
 <Price> Price </Price> [0..1]
 <RentLoanerHours> RentLoanerHours </RentLoanerHours> [0..1]
 <Make> Make </Make> [0..1]
 <DailyRate> DailyRate DailyRate> [0..1]
 <RentLoanerReasonCode> RentLoanerReasonCode </RentLoanerReasonCode> [0..1]
 <Tax> Tax</Tax> [0..*]
 <ProviderName> ProviderName [0..1]
</...>
```

RentLoanerBase

Name	RentLoanerBase
Abstract	no

Field / Component	Description	R/O	Business Rule
VIN	Rental Loaner Vehicle Identification Number	О	
RentDaysQuantity	Number of days rental/loaner was out	О	
RentOutDate	Date rental/loaner vehicle provided to customer	О	
RentInDate	Date rental/loaner vehicle turned in by customer	О	
Model	Model description of rental/loaner vehicle	О	
RentNotes	Rent Loaner Comments	О	

XML Instance Representation

```
<...>
    <VIN> VIN </VIN> [0..1]
    <RentDaysQuantity> RentDaysQuantity </RentDaysQuantity> [0..1]
    <RentOutDate> RentOutDate </RentOutDate> [0..1]
    <RentInDate> RentInDate </RentInDate> [0..1]
    <Model> Model </Model> [0..1]
    <RentNotes> RentNotes </RentNotes> [0..1]
```

RentLoanerHours

These field(s) use this type: **RentLoanerHours.**

Number of hours the rental loaner was used by the customer.

Name	RentLoanerHours
Abstract	no



RepairOrder

These field(s) use this type: **RepairOrder**.

STAR Version 3.0 - Draft

STAR Version 2.1, STAR approved 04/20/2005; effective date 07/04/2005

STAR Version 2.0, STAR approved 05/07/2004; effective date 07/04/2004

STAR Version 1.1 STAR approved 04/09/2003; OAGI approved 8/16/2002 effective date 07/04/2003

STAR Version 1.0, STAR approved 8/6/2002; OAGI approved 8/16/2002; effective date 1/01/2003

Name	RepairOrder
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Header		R	
Job	Jobs related to Warranty Claim Jobs related to Internal Pay	O	
JobReferback	Job Referback related to Warranty Claim Job Referback related to Internal Pay	О	
WarrantyClaim	Warranty Claim information related to job	O	
InternalPay		О	

```
<...>
    <Header> ... </Header> [1]
    <Job> ... </Job> [0..*]
    <JobReferback> ... </JobReferback> [0..*]
    <WarrantyClaim> ... </WarrantyClaim> [0..*]
    <InternalPay> ... </InternalPay> [0..*]
    </...>
```

RepairOrderHeader

These field(s) use this type: **Header.**

.

Name	RepairOrderHeader
Abstract	no

Field / Component	Description	R/O	Business Rule
DocumentDateTime	Is the date and time the document was last created. This is not the date and time that the BOD message instance was created.	О	
SecondaryPassword	Secondary password used to validate access to the dealer information	О	
SecondaryDealerNumber	Identifies secondary dealer number if different than primary "Dealer Number"	О	
DocumentId	Repair Order Number	R	
SecondaryReferenceNumber	Secondary Repair Order reference number	0	(INACTIVE)
Dealer	Dealer that Repair Order is being processed for	О	(INACTIVE)
			Dealer that Repair Order is being processed.
IndividualOwner	Individual who owns the vehicle	0	Either the IndividualOwner or OrganizationalOwner component can be used but not both.
OrganizationalOwner	Organization that owns the vehicle	О	
IndividualCo-Owner	Individual who co-owns the vehicle	0	Can only be used if the IndividualOwner component is used

Field / Component	Description	R/O	Business Rule
OrganizationalCo-Owner	Organization that co-owns the vehicle	О	Can only be used if the OrganizationalOwner component is used.
PrimaryDriver	Primary driver of the vehicle	0	(INACTIVE)
SecondaryDriver	Secondary driver(s) of the vehicle	0	(INACTIVE)
Vehicle	Static information on vehicle	О	Please note that although the Schema shows this as an Optional component, in this BOD usage, it should be Required
Warranty	Vehicle warranty information	О	
ServiceContract	Vehicle Servcie Contract(s)	0	(INACTIVE)
CASE	Customer arbitration information	0	(INACTIVE)
RepairOrderOpenedDate	System date when Repair Order was opened	О	In YYYY-MM-DD format
RepairOrderCompletedDate	The date the last line was closed on the repair order	О	
RepairOrderInvoiceDate	The date the repair order transaction moves to accounting	О	In YYYY-MM-DD format
			Whenever the Repair Order has Customer Pay, this field needs to be populated.
ServiceAdvisor	Service Advisor for repair order	O	Please note that although the Schema shows this as an Optional component, in this BOD usage, it should be Required
MileageIn	Odometer reading of vehicle when repair order was opened	О	Requires "uom" attribute for mileage type
			K-Kilometers, M-Miles
			Please note that although the Schema shows this as an Optional field in this BOD usage, it should be Required
Published by Standards for Technolog	ry in Automotive Retail © 2006		95

Field / Component	Description	R/O	Business Rule
MileageOut	Odometer reading of vehicle when repair order was opened	О	Requires "uom" attribute for mileage type
			K-Kilometers, M-Miles
			Please note that although the Schema shows this as an Optional field in this BOD usage, it should be Required
OrderNotes	Free form text for general repair order comment which will be printed the invoice	on O	
OrderInternalNotes	Free form text for internal repair order remarks that will NOT be print on the invoice	ed O	(INACTIVE)
DepartmentType	Identifies the internal department	О	If an Internal Pay Repair Order, this field needs to be populated
RentLoaner	Rental or Loaner verhicles associated with Repair Order	О	
ServiceComponents	Service Components associated with Repair Order (Miscellaneous, GasOilGrease, PaintMaterials, ShopSupplies and Freight	О	Values: Miscellaneous, GasOilGrease, PaintMaterials, ShopSupplies, Freight
			Required if any of the Values listed are used.
Sublet	Service Components associated with Repair Order (Miscellaneous, GasOilGrease, PaintMaterials, ShopSupplies and Freight	О	
LaborRate	Dealer Posted Hourly Retail Labor Rate	О	Requires "currency" attibute
Price	Customer Pay, Warranty and Internal Pay totals	О	Values: Customer, Claim, Internal
			Please note that although the Schema shows this as an Optional component, at least one Price component needs to be sent – either the 'Customer" 'Claim" or "Internal
Тах	Total Repair Order taxes	О	

Field / Component	Description	R/O	Business Rule
DataCollectionStatus	Indicates status of data for the record it appears on , either complete or incomplete	О	Values: C - Complete, I - Incomplete
ESCFranchiseInd	Extended Service Competitive (ESC) flag indicates if dealer has	О	(INACTIVE)
	franchise for Extended Service Program (ESP) repair for competitive make		Values: 1 - Yes, 0 - No
Splits	Splits total for Repair Order	О	Value: Total
TreadActInd	Indicates if there has been fire damage (i.e., could indicate any tread related repair)	О	Values: 1 - Yes, 0 - No
LocationId	Code identifying the physical location of a dealer.	О	
RepairOrderStatus	Status of the repair order.	О	

```
<...>
 <DocumentDateTime> DocumentDateTime </DocumentDateTime> [0..1]
 <SecondaryPassword> SecondaryPassword </SecondaryPassword> [0..1]
 <SecondaryDealerNumber> SecondaryDealerNumber </secondaryDealerNumber> [0..1]
 <DocumentId> DocumentId </DocumentId> [1]
 <SecondaryReferenceNumber> SecondaryReferenceNumber /SecondaryReferenceNumber> [0..1]
 <Dealer> ROServiceDealerParty /Dealer> [0..1]
 <IndividualOwner> IndividualOwnerPartyExtendedRO </IndividualOwner> [0..1]
 <OrganizationalOwner> OrganizationalOwnerPartyExtendedRO 
 <IndividualCo-Owner> IndividualOwnerPartyExtendedRO </IndividualCo-Owner> [0..1]
 <OrganizationalCo-Owner> OrganizationalOwnerPartyExtendedRO </OrganizationalCo-Owner> [0..1]
 <PrimaryDriver> IndividualOwnerPartyExtendedRO </primaryDriver> [0..1]
 <SecondaryDriver> IndividualOwnerPartyExtendedRO </SecondaryDriver> [0..*]
 < Vehicle > Service Vehicle < / Vehicle > [0..1]
 <Warranty> WarrantyAdditional </Warranty> [0..*]
 <ServiceContract> FullServiceContract </ServiceContract> [0..*]
 <CASE> CASE </CASE> [0..*]
 <RepairOrderOpenedDate> RepairOrderOpenedDate </RepairOrderOpenedDate> [0..1]
 <RepairOrderCompletedDate> RepairOrderCompletedDate
```

```
<RepairOrderInvoiceDate> RepairOrderInvoiceDate 
 <ServiceAdvisor> ServiceAdvisor </ServiceAdvisor> [0..1]
 <MileageIn> MileageIn </MileageIn> [0..1]
 <MileageOut> MileageOut </MileageOut> [0..1]
 <OrderNotes> OrderNotes> [0..1]
 <OrderInternalNotes> OrderInternalNotes> (0..1)
 <DepartmentType> DepartmentType </DepartmentType> [0..1]
 <RentLoaner> RentLoaner </RentLoaner> [0..*]
 <ServiceComponents> ServiceComponents </ ServiceComponents> [0..*]
 <Sublet> Sublet </Sublet> [0..*]
 <LaborRate> LaborRate </LaborRate> [0..1]
 <Price> Price </Price> [0..3]
 <Tax> Tax</Tax> [0..*]
 <DataCollectionStatus> DataCollectionStatus </DataCollectionStatus> [0..1]
 < ESCFranchiseInd > ESCFranchiseInd > [0..1]
 <Splits> Splits </Splits> [0..1]
 <TreadActInd> TreadActInd </TreadActInd> [0..1]
 <LocationId> LocationId </LocationId> [0..1]
 <RepairOrderStatus> ServiceContractStatus </RepairOrderStatus> [0..*]
</...>
```

ReplacementSerialNumbers

These field(s) use this type: **ReplacementSerialNumbers.**

represents information about the parts replaced on the job

Name	ReplacementSerialNumbers
Abstract	no

Field / Component	Description	R/O	Business Rule
OriginalSerialNumber	The serial number of the part that is being replaced	О	
ReplacementSerialNumber	The serial number of the part that is used to replace another part	О	

Field / Component	Description	R/O	Business Rule
ItemId	The Part Number or Manufacturer Code of the part used to replace another part>	О	
PartType	Specifies whether the parts are indicated by manufacturer part code or Part Number	0	Values: H - Manufacturer Part Code, P - Part number is used

XML Instance Representation

```
<...>
    <OriginalSerialNumber> OriginalSerialNumber </OriginalSerialNumber> [0..1]
    <ReplacementSerialNumber> ReplacementSerialNumber </ReplacementSerialNumber> [0..1]
    <ItemId> ItemId </ItemId> [0..1]
    <PartType> PartType </PartType> [0..1]
    </...>
```

RestrictionDescription

These field(s) use this type: **RestrictionDescription.**

Description of vehicle use restrictions

Name	RestrictionDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

ROServiceDealerParty

These field(s) use this type: **Dealer.**

Name ROServiceDealerParty

Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	О	
DealerName	Dealer name	О	
DistrictCode	Manufacturer Assigned District Code	O	
URI	Dealer URI	O	
ZoneCode	Manufacturer Assigned Zone Code	O	
BusinessCenter	Identification of business area. Example: grouping of zones	О	
MarketCode	A market code that designates the market area.	О	

XML Instance Representation

SecondaryDealerNumber

These field(s) use this type: **SecondaryDealerNumber.**

Identifies secondary dealer number if different than primary "Dealer Number"

Name	SecondaryDealerNumber
Abstract	no

XML Instance Representation



Sender

These field(s) use this type: **Sender.**

Name	Sender
Abstract	no

Field / Component	Description	R/O	Business Rule
LogicalId	Provides the logical location of the server and applications from which the Business Object Document originated. It can be used to establish a logical to physical mapping, however its use is optional. Each system or combination of systems should maintain an external central reference table containing the logical names or logical addresses of the application systems in the integration configuration. This enables the logical names to be mapped to the physical network addresses of the resources needed on the network. Note: The technical implementation of this Domain Naming Service is not dictated by this specification. This logical to physical mapping may be done at execution time by the application itself or by a middleware transport mechanism, depending on the integration architecture used. This provides for a simple but effective directory access capability while maintaining application independence from the physical location of those resources on the network		
Component	Provides a finer level of control than Logical Identifier and represents the business application that issued the Business Object Document. Its use is optional. For STAR's use this is the DCS Software code name		
Task	Describes the business event that initiated the need for the Business Object Document to be created. For STAR, the task is defined in the Implementation Guidelines for each BOD. It is usually a short description of the BOD. Ex: SalesLead, CreditDecision, etc.	R	

Field / Component	Description	R/O	Business Rule
ReferenceId	Enables the sending application to indicate the instance identifier of the event or task that caused the BOD to be created. This is used to correlate a response BOD to an originating BOD		
AuthorizationId	Identifyies the authorization level of the user or application that is sending the Business Object Document Message. This authorization leve being recognized be the receiving system indicates what can be done on the receiving system. For STAR, this is the User ID.		
CreatorNameCode	DCS Software Creator Code	R	
SenderNameCode	Additional information about the sending platform (i.e., Short MFG or DSP code).	R	Must use a valid code from the ShortMfg/RSP list on http://www.starstandards.org
SenderURI	Physical address of the sender	О	
DealerNumber	Dealer Code of source of information	О	
StoreNumber	Dealer code store number (DMS assigned)	О	
AreaNumber	Dealer code area number (DMS vendor assigned)	О	
DealerCountry	Source Dealer country location	О	
Language	This code is used to define the language of the data used in this transaction	0	
DeliverPendingMailInd	Indicates if the user requests to receive pending mail that has been stored and has yet not been delivered yet. By selecting 0, the user will only receive the response for the current transaction the user is performing.	d O	1 - Receive Pending Mail. 0 - Do not receive pending mail.
Password	Token for application specific authentication. Used to authenticate dealership/users through application specific security	О	
SystemVersion	The sender's software version number.	О	

Field / Component	Description	R/O	Business Rule
PartyId	The Party Id field uniquely identifies the Sender of the message. This element can be used for parties within the Automotive Community as well as external parties. Party Id is not intended as a replacement for the Dealer Number. Suggested formats for OEMs or other large institutions include: DUNs Number, ShortMfgCode + DUNs, or ShortMfgCode. The suggested format for Dealers is: ShortMfgCode+Dealer Number.		
LocationId	The Location Id field uniquely identifies the location of the Sender of a message. This Id may be aligned with a physical address or data centers. This field provides an additional level of granularity beyond the usage of the Party Id for additional routing and deliver of data.		
ServiceId	The Service Id field identifies the particular service from which a message is being sent, e.g., an inventory service.	О	

```
<...>
 <LogicalId> Text </LogicalId> [0..1]
 <Component> Text </Component> [1]
 <Task> Text </Task> [1]
 <ReferenceId> Reference </ReferenceId> [0..1]
 < AuthorizationId > Id < / AuthorizationId > [0..1]
 <CreatorNameCode> Text </CreatorNameCode> [1]
 <SenderNameCode> ShortMfg </SenderNameCode> [1]
 <SenderURI> URI </SenderURI> [0..1]
 <DealerNumber> PartyId /DealerNumber> [0..1]
 <StoreNumber> Text </StoreNumber> [0..1]
 <AreaNumber> Text </AreaNumber> [0..1]
 <DealerCountry> Country /DealerCountry> [0..1]
 <Language> Language </Language> [0..1]
 <DeliverPendingMailInd> Indicator </DeliverPendingMailInd> [0..1]
 <Password> Text </Password> [0..1]
 <SystemVersion> SystemVersion </SystemVersion> [0..1]
 <PartyId> PartyId </PartyId> [0..1]
 <LocationId> LocationId </LocationId> [0..1]
 <ServiceId> ServiceId </serviceId> [0..1]
```



SenderBase

Name	SenderBase
Abstract	no

Field / Component	Description	R/O	Business Rule
LogicalId	Provides the logical location of the server and applications from which the Business Object Document originated. It can be used to establish logical to physical mapping, however its use is optional. Each system combination of systems should maintain an external central reference table containing the logical names or logical addresses of the applical systems in the integration configuration. This enables the logical name to be mapped to the physical network addresses of the resources need on the network. Note: The technical implementation of this Domain Naming Service is not dictated by this specification. This logical to physical mapping may be done at execution time by the application in or by a middleware transport mechanism, depending on the integration architecture used. This provides for a simple but effective directory access capability while maintaining application independence from the physical location of those resources on the network	a or estion nesseled	
Component	Provides a finer level of control than Logical Identifier and represent business application that issued the Business Object Document. Its u optional. For STAR's use this is the DCS Software code name		
Task	Describes the business event that initiated the need for the Business Object Document to be created. For STAR, the task is defined in the Implementation Guidelines for each BOD. It is usually a short description of the BOD. Ex: SalesLead, CreditDecision, etc.	R	
ReferenceId	Enables the sending application to indicate the instance identifier of event or task that caused the BOD to be created. This is used to corre a response BOD to an originating BOD		

Field / Component	Description	R/O	Business Rule
AuthorizationId	Identifyies the authorization level of the user or application that is sending the Business Object Document Message. This authorization level being recognized be the receiving system indicates what can be done on the receiving system. For STAR, this is the User ID.		

XML Instance Representation

```
<...>
<LogicalId> Text </LogicalId> [0..1]
<Component> Text </Component> [1]
<Task> Text </Task> [1]
<ReferenceId> Reference </ReferenceId> [0..1]
<AuthorizationId> Id </AuthorizationId> [0..1]
</...>
```

ServiceAdvisor

These field(s) use this type: **ServiceAdvisor.**

Name	ServiceAdvisor
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	O	
AlternatePartyIds	Social security number or other legal document Id of service advisor assigned to Repair Order	О	
ServiceAdvisorName	Name of service advisor	0	Please note that although the Schema shows this as an Optional field, in this BOD usage, it should be Required.

```
<...>
    <PartyId> PartyId </PartyId> [0..1]
    <AlternatePartyIds> OrganizationalPartyAlternatePartyId </AlternatePartyIds> [0..*]
    <ServiceAdvisorName> ServiceAdvisorName </ServiceAdvisorName> [0..1]
    </...>
```

ServiceCampaign

These field(s) use this type: **ServiceCampaign, ServiceCampaign.**

Name	ServiceCampaign ServiceCampaign
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
CampaignNumber	Manufacturer assigned campaign number	O	
CampaignOptionCode	Manufacturer assigned Campaign Option Code	O	
CampaignReimbursementCode	A campaign related field specifying the reimbursement code for a campaign service. Reimbursement codes denote the mix of part and labor operations the dealer used to perform the service. Ex: Numeric value between 1 and 9	O or	
CampaignDescription	Service Campaign Description	О	
CampaignDispositionCode	A campaign related field specifying the disposition of a campaign Excompleted, open, etc.	О	
SupplementalCampaignInd	Denotes whether claim is actual campaign service or additional service, but still related to the campaign	О	
CampaignNotes	Free form comments related to campaign	О	

```
<...>
<CampaignNumber> CampaignNumber </CampaignNumber> [0..1]
```

- <CampaignOptionCode> CampaignOptionCode </CampaignOptionCode> [0..1]
- <CampaignReimbursementCode> CampaignReimbursementCode </CampaignReimbursementCode> [0..1]
- <CampaignDescription> CampaignDescription </CampaignDescription> [0..1]
- <CampaignDispositionCode> CampaignDispositionCode </CampaignDispositionCode> [0..1]
- <SupplementalCampaignInd> SupplementalCampaignInd </SupplementalCampaignInd> [0..1]
- <CampaignNotes> CampaignNotes </CampaignNotes> [0..1]

</...>

ServiceCampaignExtended

These field(s) use this type: **ServiceCampaign.**

Name	ServiceCampaignExtended
Abstract	no

Field / Component	Description	R/O	Business Rule
CampaignNumber	Manufacturer assigned campaign number	О	
CampaignOptionCode	Manufacturer assigned Campaign Option Code	О	
CampaignReimbursementCode	A campaign related field specifying the reimbursement code for a campaign service. Reimbursement codes denote the mix of part and labor operations the dealer used to perform the service. Ex: Numeric value between 1 and 9	O or	
CampaignDescription	Service Campaign Description	О	
CampaignDispositionCode	A campaign related field specifying the disposition of a campaign Excompleted, open, etc.	О	
SupplementalCampaignInd	Denotes whether claim is actual campaign service or additional service, but still related to the campaign	О	
CampaignNotes	Free form comments related to campaign	О	
CampaignBulletinId	Identification of the service bulletin associated with a particular campaign	0	

XML Instance Representation

ServiceComponents

These field(s) use this type: <u>ServiceComponents,ServiceComponents,ServiceComponents,ServiceComponents</u>.

Name	ServiceComponents
Abstract	no

Field / Component	Description	R/O	Business Rule
ComponentType	Identifies the type of ServiceComponent	R	
ServiceCode	Manufacturer assigned code for service component associated with job	О	
ServiceDescription	Free form text description of service component associated with job	О	
Price	Price and cost information assoicated with service component	О	
ItemQuantity	Quantity used for service component	О	
ExpenseHours	Time allotted for administrative work	0	(INACTIVE)
AppealActionCode	Defines action to be taken on appeal	О	(INACTIVE)

Field / Component	Description	R/O	Business Rule
DocumentId	Free form entry for document associated with service component (i.e., Shipper, BOL, Invoice, etc.)	О	
Splits	Splits assoicated with service component	О	
Тах	Tax assoicated with service component	O	
CarrierId	Carrier code related to service component	О	

XML Instance Representation

ServiceContractBase

Name	ServiceContractBase
Abstract	no

Field / Component	Description	R/O	Business Rule
ContractCompanyName	Service contract company name	О	
ContractId	Identification of Service Contract	О	

Field / Component	Description	R/O	Business Rule
ContractPlanCode	Service Contract Plan Code	О	
ContractType	Service contract type and/or area of coverage	О	
ContractPlanDescription	Description of service plan. Example: 36 MONTH/36000 MILE"	О	
Term	Number of months in contract plan	O	
ContractStartDate	Service Contract sale Date	O	
ContractDeductible	Amount of Deductible at time of service Eg:\$50.00	O	
ContractExpirationDate	Date the Service contract expires	О	
ContractStartMileage	Odometer reading when contract becomes effective	О	
ContractTermMileage	Mileage allowed under terms of service contract	O	
ContractOwnerName	Name on service Contract (i.e., full name - First Last)	O	
InsuranceCompanyName	Memo Field for carrier covering extended service contract	O	
TotalContractAmount	Total amount of the service contract.	О	
ContractNote	Free form comments that relate to the contract	О	

<>
<contractcompanyname> ContractCompanyName </contractcompanyname> [01]
<contractid> ContractId </contractid> [01]
<contractplancode> ContractPlanCode </contractplancode> [01]
<contracttype> ContractType </contracttype> [01]
<contractplandescription> ContractPlanDescription </contractplandescription> [01]
<term> Term </term> [01]
<contractstartdate> ContractStartDate </contractstartdate> [01]
<contractdeductible> ContractDeductible </contractdeductible> [01]
<pre><contractexpirationdate> ContractExpirationDate </contractexpirationdate> [01]</pre>
<contractstartmileage> ContractStartMileage </contractstartmileage> [01]
<contracttermmileage> ContractTermMileage </contracttermmileage> [01]
<contractownername> ContractOwnerName </contractownername> [01]

```
<InsuranceCompanyName> InsuranceCompanyName </InsuranceCompanyName> [0..1]
<TotalContractAmount> TotalContractAmount </TotalContractAmount> [0..1]
<ContractNote> ContractNote </ContractNote> [0..1]
</...>
```

ServiceContractStatus

These field(s) use this type: **RepairOrderStatus.**

Status of the service contract

Name	ServiceContractStatus
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
StatusType	Defines the type of status that occured.	O	
StatusCode	A code identifying the reason for a status message.	O	
StatusText	Descriptive status text.	О	

XML Instance Representation

ServiceDealerParty

Name	ServiceDealerParty
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	О	
DealerName	Dealer name	О	
DistrictCode	Manufacturer Assigned District Code	О	
URI	Dealer URI	О	
ZoneCode	Manufacturer Assigned Zone Code	О	
BusinessCenter	Identification of business area. Example: grouping of zones	O	

XML Instance Representation

```
<...>
<PartyId> PartyId </PartyId> [0..1]
<DealerName> DealerName </DealerName> [0..1]
<DistrictCode> DistrictCode </DistrictCode> [0..1]
<URI> URI </URI> [0..1]
<ZoneCode> ZoneCode </ZoneCode> [0..1]
<BusinessCenter> BusinessCenter </BusinessCenter> [0..1]
</...>
```

ServiceDescription

These field(s) use this type: **ServiceDescription.**

Free form text description of service component

Name	ServiceDescription
Abstract	no

```
<...
language="Language [0..1]">
```

Description

</...>

Serviceld

These field(s) use this type: **ServiceId**.

The Service Id field identifies the particular service to or from which a message is being sent, e.g., an inventory service.

Name Serviceld

Abstract no

XML Instance Representation



ServiceLabor

These field(s) use this type: $\underline{ServiceLabor, ServiceLabor.}$

Name ServiceLabor

Abstract no

Field / Component	Description	R/O	Business Rule
LaborOperationId	Currently assigned code for this operation (preferably manufacturer code)	О	
LaborOperationIdType	Labor operation category code	О	
LaborOperationDescription	Description of a particular operation code	O	
PartNameCodeDescription	Description of Part identifier (PNC) that caused the failure	О	

Field / Component	Description	R/O	Business Rule
LaborOperationLocation	Code Indicating Position/Location on Vehicle where labor was performed	О	
LaborActionCode	Manufacturer-assigned code to describe type of labor performed	О	
LaborAllowanceHours	Flat rate labor hour allowance for this operation	О	
LaborAdditionalHours	Additional labor hours above flat rate allowance	O	
LaborOperationQuantity	Number of times this operation was performed for this labor line	О	
Diagnostics	Diagnostics from vehicle service associated with labor	О	
AdditionalHoursLaborComment	Explanation for the need for the additional labor hours	О	(INACTIVE)
PartNameCode	Part identifier which is comprised of a system and component code that caused the failure	0	
LaborRate	Labor Rate for this operation code	О	
Price	Labor Price for labor operation code	0	Please note that although the Schema shows this as an Optional component, in this BOD usage, it should be Required.
AppealActionCode	Defines action to be taken on appeal	О	(INACTIVE)
MainOperationCode	Identifies the primary laborline or "main operator" that caused the vehicle to be serviced in the first place	0	(INACTIVE)
LaborActualHours	Actual labor hours spent by the technician to complete this labor operation	О	
NoChargeLaborCode	Indicates this labor operation is a no-charge (e.g, NC=Nop Charge; OL=Overlapping)	0	
LaborOperationPolicyCode	Dealer assigned Policy code for the labor operation	О	(INACTIVE)
LaborNarrative	Labor Narrative related to Labor	О	
LaborOperationComment	Free form comment regarding the labor operation.	0	(INACTIVE)
Published by Standards for Technology	' A		11/

Field / Component	Description	R/O	Business Rule
Technician	Technicians related to labor operation	O	
Тах	Actual amount of tax paid on parts	O	
Splits	Part Adjustment	O	
ServiceParts	Parts related to labor operation	O	
Sublet	Sublet related to labor operation	O	

```
<...>
 <LaborOperationId> LaborOperationId </LaborOperationId> [0..1]
 <LaborOperationIdType> LaborOperationIdType </LaborOperationIdType> [0..1]
 <LaborOperationDescription> LaborOperationDescription </LaborOperationDescription> [0..1]
 <PartNameCodeDescription> PartNameCodeDescription 
 <LaborOperationLocation> LaborOperationLocation </LaborOperationLocation> [0..1]
 <LaborActionCode> LaborActionCode </LaborActionCode> [0..1]
 <LaborAllowanceHours> LaborAllowanceHours </LaborAllowanceHours> [0..1]
 <LaborAdditionalHours> LaborAdditionalHours </LaborAdditionalHours> [0..1]
 <LaborOperationQuantity> LaborOperationQuantity </LaborOperationQuantity> [0..1]
 <Diagnostics> Diagnostics </Diagnostics> [0..*]
 < Additional Hours Labor Comment > Additional Hours Labor Comment > [0..1]
 <PartNameCode> PartNameCode </PartNameCode> [0..1]
 <LaborRate> LaborRate </LaborRate> [0..1]
 <Price> Price </Price> [0..1]
 <AppealActionCode> AppealActionCode </AppealActionCode> [0..1]
 <MainOperationCode> MainOperationCode </MainOperationCode> [0..1]
 <LaborActualHours> LaborActualHours </LaborActualHours> [0..1]
 <NoChargeLaborCode> NoChargeLaborCode </NoChargeLaborCode> [0..1]
 <LaborOperationPolicyCode> LaborOperationPolicyCode </LaborOperationPolicyCode> [0..1]
 <LaborNarrative> LaborNarrative </LaborNarrative> [0..*]
 <LaborOperationComment> LaborOperationComment </LaborOperationComment> [0..1]
 <Technician> ServiceTechnician </Technician> [0..*]
 < Tax > Tax < / Tax > [0..*]
 <Splits> Splits </Splits> [0..1]
```

```
<ServiceParts> ServiceParts </ServiceParts> [0..*]
<Sublet> Sublet </Sublet> [0..*]
</...>
```

ServiceLaborBase

Name	ServiceLaborBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
LaborOperationId	Currently assigned code for this operation (preferably manufacturer code)	О	
LaborOperationIdType	Labor operation category code	О	
LaborOperationDescription	Description of a particular operation code	О	
PartNameCodeDescription	Description of Part identifier (PNC) that caused the failure	O	
LaborOperationLocation	Code Indicating Position/Location on Vehicle where labor was performed	О	
LaborActionCode	Manufacturer-assigned code to describe type of labor performed	О	
LaborAllowanceHours	Flat rate labor hour allowance for this operation	О	
LaborAdditionalHours	Additional labor hours above flat rate allowance	O	
LaborOperationQuantity	Number of times this operation was performed for this labor line	О	_
Diagnostics	Diagnostics from vehicle service associated with labor	О	

XML Instance Representation

<...>

- <LaborOperationId> LaborOperationId </LaborOperationId> [0..1]
- <LaborOperationIdType> LaborOperationIdType </LaborOperationIdType> [0..1]
- <LaborOperationDescription> LaborOperationDescription </LaborOperationDescription> [0..1]

```
<PartNameCodeDescription> PartNameCodeDescription </PartNameCodeDescription> [0..1]
<LaborOperationLocation> LaborOperationLocation </LaborOperationLocation> [0..1]
<LaborActionCode> LaborActionCode </LaborActionCode> [0..1]
<LaborAllowanceHours> LaborAllowanceHours </LaborAllowanceHours> [0..1]
<LaborAdditionalHours> LaborAdditionalHours </LaborAdditionalHours> [0..1]
<LaborOperationQuantity> LaborOperationQuantity </LaborOperationQuantity> [0..1]
<Diagnostics> Diagnostics </Diagnostics> [0..*]
```

ServiceOption

These field(s) use this type: **Option.**

Name	ServiceOption
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
OptionType	An option type for a vehicle or other component. Usually references an OEM supplied list of codes.	О	
OptionName	Name of vehicle option	О	
OptionStockNumber	Stock Number of Vehicle Option	О	
Manufacturer	Manufacturer of Vehicle Option	О	
OptionSecurityCode	Security code to unlock option. (i.e, radio code)	O	



ServiceParts

These field(s) use this type: **ServiceParts, ServiceParts.**

Nar	ne	ServiceParts
Abs	stract	no

Field / Component	Description	R/O	Business Rule
ItemId	Item part number identifier	О	
ItemIdDescription	Item part number detail description	О	
ItemQuantity	Quantity of Part number used on service	О	
GroupNumber	Group Number	О	
PartType	Specifies whether the parts are indicated by manufacturer part code or Part Number	О	
Price	Price and cost for parts and return core	О	Values: Parts, ReturnCore
			Please note that although the Schema shows this as an Optional component, in this BOD usage, it should be Required for this PriceType
AppealActionCoce	Defines action to be taken on appeal	О	
PartAccessoryInd	Indicates whether this is an accessory	0	Values: 1 - Yes, 0 - No
PartSourceCode	Indicates the source of the part (e.g. M - Manufacturer)	О	
MarkupPercentage	Dealer submitted part markup percentage	О	
MarkupType	Specifiies the markup applied by system or dealership input (e.g., S=System)	0	

Field / Component	Description	R/O	Business Rule
ReplacementSerialNumbers	ReplacementSerialNumber	O	
Тах	Actual amount of tax paid on parts	О	
Splits	Part Adjustment	O	

XML Instance Representation

ServicePartsBase

Name	ServicePartsBase
Abstract	no

Field / Component	Description	R/O	Business Rule
ItemId	Item part number identifier	О	
ItemIdDescription	Item part number detail description	O	

Field / Component	Description	R/O	Business Rule
ItemQuantity	Quantity of Part number used on service	О	
GroupNumber	Group Number	O	
PartType	Specifies whether the parts are indicated by manufacturer part code or Part Number	О	

XML Instance Representation

```
<...>
<ItemId> ItemId </ItemId> [0..1]
<ItemIdDescription> ItemIdDescription </ItemIdDescription> [0..1]
<ItemQuantity> ItemQuantity </ItemQuantity> [0..1]
<GroupNumber> GroupNumber </GroupNumber> [0..1]
<PartType> PartType </PartType> [0..1]
</...>
```

ServiceTechnician

These field(s) use this type: **Technician, Technician.**

Name	ServiceTechnician
Abstract	no

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	O	
AlternatePartyIds	Social security number or other legal document Id of technician	O	
TechnicianName	Name of technician assigned to RO	O	
TeamName	Team assigned to Repair Order	O	
TechnicianSkillArea	Type of training required to perform the labor operation	О	
TechnicianSkillLevel	Level of training required to perform the labor operation	О	

XML Instance Representation

ServiceVehicle

These field(s) use this type: **Vehicle.**

Name	ServiceVehicle ServiceVehicle
Abstract	no

Field / Component	Description	R/O	Business Rule
Model	Manufacturer-assigned model code of vehicle - Usually available in the VIN number (use NCIC code)	О	
ModelYear	Vehicle designated model year	О	
ModelDescription	Descriptive vehicle model name	О	
Make	Vehicle make code - Usually available in the VIN number (use NCIC code).	О	
SaleClass	Class of Sale	О	
Condition	Condition of Vehicle - Example: Excellent, Good, Fair, Poor, Unknown	O	
CertifiedPreownedInd	Identifies as a certified Pre-Owned Vehicle	О	
VehicleNote	Any vehicle related notes	О	
VIN	Federally defined 17 position vehicle identification number	О	

Field / Component	Description	R/O	Business Rule
DeliveryMileage	Odometer reading of vehicle at time of delivery	О	
VehicleStock	Dealer assigned vehicle stock number	О	
TrimCode	Manufacturer assigned trim code	О	
DoorsQuantity	Number of doors on vehicle	O	
BodyStyle	Manufacturer-assigned vehicle body style	O	
InteriorColor	Vehicle Interior Color(s)	О	
ExteriorColor	Vehicle Exterior Color(s)	О	
TransmissionType	Vehicle Transmission type	О	
OdometerStatus	Status of odometer at trade-in. Example:: Replaced, Tampered, Miles> 90,000, etc.	0	
NonUSVehicleInd	Indicates whether the vehicle was produced for the United States or not	О	
VehicleDemoInd	Indicates whether vehicle was ever a demo	О	
LicenseNumber	State License plate number of vehicle	O	
BrandedInfo	Vehicle Branding Information	О	
RestrictionInd	Indication that vehicle has restrictions on its use	О	
RestrictionDescription	Description of vehicle use restrictions	О	
TelematicsServiceInd	Indication whether Telematics Service Subscription is turned on	О	
Option	Service Vehicle Options	О	(INACTIVE)
TransmissionCode	Transmission Serial Number	О	(INACTIVE)
DeliveryDate	The date of original retail vehicle sale	О	IN YYYY-MM-DD format
EngineNumber	Serial number of the engine if vehicle not made for US sale	О	
IgnitionKeyNumber	Vehicle Ignition Key Number	О	(INACTIVE)

Field / Component	Description	R/O	Business Rule
AxleCode	The code on the axle of the vehicle.	О	(INACTIVE)
FleetAccount	Manufacturer defined fleet account number	О	(INACTIVE)
FleetVehicleId	Uniquely identifies the vehicle as part of a fleet company	0	(INACTIVE)
FleetPurchaseOrderNumber	Fleet Purchase Order Number vehicle was purchased under	О	(INACTIVE)
EngineDisplacement	The size of the engine. E.x 3.2L Displacement of engine (i.e., amo volume in the cylinders)	ount of O	
EngineDescription	The type of the engine. Ex. Hybrid, Electronic, Diesel, Gasoline Description of engine (e.g., 32 valves, hybrid, electronic) diesel, etc.)	O etronic,	

```
<...>
 <Model> Model </Model> [0..1]
 <ModelYear> ModelYear </ModelYear> [0..1]
 <ModelDescription> ModelDescription </ModelDescription> [0..1]
 <Make> Make </Make> [0..1]
 <SaleClass> SaleClass </SaleClass> [0..1]
 <Condition> Condition </Condition> [0..1]
 <CertifiedPreownedInd> CertifiedPreownedInd </CertifiedPreownedInd> [0..1]
 < VehicleNote > VehicleNote < / VehicleNote > [0..*]
 <VIN> VIN </VIN> [0..1]
 <DeliveryMileage> DeliveryMileage /DeliveryMileage> [0..1]
 < VehicleStock > VehicleStock < / VehicleStock > [0..1]
 <TrimCode> TrimCode </TrimCode> [0..1]
 <DoorsQuantity> DoorsQuantity </DoorsQuantity> [0..1]
 <BodyStyle> BodyStyle </BodyStyle> [0..1]
 <InteriorColor> InteriorColor </InteriorColor> [0..*]
 < Exterior Color > Exterior Color < / Exterior Color > [0..*]
 <TransmissionType> TransmissionType </TransmissionType> [0..1]
 <OdometerStatus> OdometerStatus </OdometerStatus> [0..1]
```

```
<NonUSVehicleInd> NonUSVehicleInd </NonUSVehicleInd> [0..1]
 <VehicleDemoInd> VehicleDemoInd </VehicleDemoInd> [0..1]
 <LicenseNumber> LicenseNumber </LicenseNumber> [0..1]
 <BrandedInfo> BrandedInfo </BrandedInfo> [0..1]
 <RestrictionInd> RestrictionInd </RestrictionInd> [0..1]
 <RestrictionDescription> RestrictionDescription 
 <TelematicsServiceInd> TelematicsServiceInd </TelematicsServiceInd> [0..1]
 <Option> ServiceOption </Option> [0..*]
 <TransmissionCode> TransmissionCode </TransmissionCode> [0..1]
 <DeliveryDate> DeliveryDate [0..1]
 <EngineNumber> EngineNumber </EngineNumber> [0..1]
 <IgnitionKeyNumber> IgnitionKeyNumber </IgnitionKeyNumber> [0..1]
 <AxleCode> AxleCode </AxleCode> [0..1]
 <FleetAccount> FleetAccount /FleetAccount> [0..1]
 <FleetVehicleId> FleetVehicleId /FleetVehicleId> [0..1]
 <FleetPurchaseOrderNumber> FleetPurchaseOrderNumber /FleetPurchaseOrderNumber> [0..1]
 < Engine Displacement > Engine Displacement < / Engine Displacement > [0..1]
 < Engine Description > Engine Description < / Engine Description > [0..1]
</...>
```

SeverityCode

These field(s) use this type: **SeverityCode**.

Degree of damage

Name	SeverityCode
Abstract	no

XML Instance Representation



Signature

These field(s) use this type: **Signature.**

Name	Signature
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
qualifyingAgency		О	

Data Elements and Components

XML Instance Representation

```
<...
qualifyingAgency="Text [0..1]">
Allow any elements from any namespace (strict validation). [0..1]
</...>
```

SparePartMileage

These field(s) use this type: **SparePartMileage.**

Mileage at which the failed part was originally installed

Name	SparePartMileage
Abstract	no

```
<...
uom="MileageMeasure [0..1]">
Mileage
</...>
```

SplitPercent

These field(s) use this type: **SplitPercent.**

Cost Split percentage

Name SplitPercent

Abstract no

XML Instance Representation

<...>
 Percent </...>

Splits

 $These \ field (s) \ use \ this \ type: {\color{blue} \underline{Splits,Splits$

Name Splits
Abstract no

Field / Component	Description	R/O	Business Rule
SplitsType	Identifies the type of ServiceComponent	R	
Price	Price and cost information assoicated with Splits	О	
SplitPercent	Cost Split percentage	О	
CustomerPercent	Percentage paid by customer	O	
InternalPercent	Percentage paid by internal (dealer)	О	
CustomerMaximumAmount	Maximum Price paid by customer	O	
InternalMaximumAmount	Maximum Price paid by internal (dealer)	О	

Field / Component	Description	R/O	Business Rule
WarrantyPercent	Percentage paid by OEM	О	
PartMaximumAmount	Total Amount of part allowance	O	
PreAdjustmentAmount	Total amount derived before the application of tax. (i.e., Dealership's Par Adjustment Amount)	rtO	

XML Instance Representation

SubDealerNumber

These field(s) use this type: **SubDealerNumber.**

International Dealer code used for distributor reference

Name	SubDealerNumber
Abstract	no



Sublet

These field(s) use this type: **Sublet, Sublet, Sublet.**

Name	Sublet
Abstract	no

Field / Component	Description	R/O	Business Rule
HandlingAmount	Sublet handling charges	O	
Price	Sublet Invoice Price	R	
AuthorizationNumber	Third party purchase order number for work	O	
SubletCode	Type of sublet work	R	If no value entered or defined for the SubletCode, value to be sent should be "N/A"
SubletWorkDescription	Free form text comments relating to sublet	R	
SubletInvoiceNumber	Third party invoice number for work	О	
AppealActionCode	Defines action to be taken on appeal	О	(INACTIVE)
ProviderName	Party that provided the service or vehicle	O	
LaborRate	Dealer Posted Hourly Retail Labor Rate	О	(INACTIVE)
CodesAndComments	Codes and comments related to Sublet	О	(INACTIVE)
Diagnostics	Diagnostics from vehicle service associated with sublet	О	
ServiceParts	Parts used on sublet	0	(INACTIVE)
ServiceCampaign	Service Campaign (Recall) associated with sublet	О	(INACTIVE)

Field / Component	Description	R/O	Business Rule
ServiceLabor	Labor used on sublet	О	
Coupon	Coupn used on sublet	0	(INACTIVE)
Technician	Technician associcated with sublet	О	(INACTIVE)
ServiceComponents	Service Components associated with sublet(Miscellaneous, GasOilGrease, PaintMaterials, ShopSupplies and Freight	О	(INACTIVE)
Splits	Splits assoicated with sublet	0	(INACTIVE)
Transportation	Transportation associcated with sublet	0	(INACTIVE)
Тах	Sublet tax price on associated parts and labor	О	
RentLoaner	Rental or Loaner verhicles associated with Repair Order	O	

```
<...>
 <HandlingAmount> HandlingAmount /HandlingAmount> [0..1]
 <Price> Price </Price> [1]
 <a href="AuthorizationNumber"></authorizationNumber</a> [0..1]
 <SubletCode > SubletCode </SubletCode> [1]
 <SubletWorkDescription> SubletWorkDescription </SubletWorkDescription> [1]
 <SubletInvoiceNumber> SubletInvoiceNumber SubletInvoiceNumber> [0..1]
 <AppealActionCode> AppealActionCode </AppealActionCode> [0..1]
 <ProviderName> ProviderName [0..1]
 <LaborRate> LaborRate </LaborRate> [0..1]
 <CodesAndComments> CodesAndCommentsExpanded </CodesAndComments> [0..1]
 <Diagnostics> Diagnostics </Diagnostics> [0..*]
 <ServiceParts> ServiceParts </ServiceParts> [0..*]
 <ServiceCampaign> ServiceCampaign </ServiceCampaign> [0..*]
 <ServiceLabor> ServiceLabor /ServiceLabor> [0..*]
 <Coupon> Coupon </Coupon> [0..*]
 <Technician> ServiceTechnician </Technician> [0..*]
```

```
<ServiceComponents> ServiceComponents </ServiceComponents> [0..*]
<Splits> Splits </Splits> [0..1]
<Transportation> Transportation </Transportation> [0..*]
<Tax> Tax </Tax> [0..*]
<RentLoaner> RentLoaner </RentLoaner> [0..*]
</...>
```

SubletLaborCostPercent

These field(s) use this type: **SubletLaborCostPercent.**

Percentage of sublet labor cost to be paid by manufacturer as goodwill for this job.

Name	SubletLaborCostPercent
Abstract	no

XML Instance Representation

```
<...>
Percent
</...>
```

SubletPartsCostPercent

These field(s) use this type: **SubletPartsCostPercent.**

Percentage of sublet parts cost to be paid by manufacturer as goodwill for this job.

Name	SubletPartsCostPercent
Abstract	no

```
<...>
Percent
</...>
```

SubletWorkDescription

These field(s) use this type: **SubletWorkDescription.**

Free form text comments relating to sublet

Name	SubletWorkDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

SymptomCodeDescription

These field(s) use this type: **SymptomCodeDescription.**

Description of symptom code

Name	SymptomCodeDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

Tax

These field(s) use this type: <u>Tax,Tax,Tax,Tax,Tax,Tax,Tax,Tax,Tax.</u>

Name

Abstract

no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ТахТуре	Identifies the type tax.	R	
TaxDescription	Free form text description of tax amount.	O	
TaxAmount	Actual amount of tax paid.	O	
UnitSalesTaxAmount	Unit amount of sales tax.	O	
TaxRate	Tax Percentage Rate	О	
TotalTaxableAmount	Total taxble price	O	
NonTaxableAmount	Total non-taxble price	O	
TaxTypeId	Tax type identification	0	Values: CS – City, CP – County, ST – State, OT – Other, EX – Excise, VAT – VAT, PST - Provincial Sales Tax, RT – Rental, GST - Goods and Services Tax, HST - Harmonized Tax, ART - Air Tax, QST - Quebec Sales Tax
TaxabilityInd	Determines whether the dealer wants to claim tax on the cost.	О	Values: 1 - Yes, 0 - No

```
<TaxabilityInd> TaxabilityInd </TaxabilityInd> [0..1] </...>
```

TaxableAmount

These field(s) use this type: **TaxableAmount.**

Total Taxable Price

Name	TaxableAmount
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

TaxAmount

These field(s) use this type: **TaxAmount.**

Actual amount of tax paid.

Name	TaxAmount
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

TaxDescription

These field(s) use this type: **TaxDescription.**

Free form text description of tax amount.

Name	TaxDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

TaxRate

These field(s) use this type: **TaxRate.**

Tax Percentage rate.

Name	TaxRate
Abstract	no

XML Instance Representation



TechnicianBase

Name	TechnicianBase
Abstract	no

Field / Component	Description	R/O	Business Rule
PartyId	Party Identification Number	O	

Field / Component	Description	R/O	Business Rule
AlternatePartyIds	Social security number or other legal document Id of technician	О	
TechnicianName	Name of technician assigned to RO	О	
TeamName	Team assigned to Repair Order	О	
TechnicianSkillArea	Type of training required to perform the labor operation	O	
TechnicianSkillLevel	Level of training required to perform the labor operation	O	

XML Instance Representation

Term

These field(s) use this type: $\underline{\textbf{Term.}}$

Number of months of contract term

Name	Term
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
length		R	

```
<...
length="TermLength [0..1]">
        Count
        </...>
```

${\bf Tire Tread Depth}$

These field(s) use this type: **TireTreadDepth.**

Depth of vehicle's tire tread

Name	TireTreadDepth
Abstract	no

XML Instance Representation

```
<...>
Measurement
</...>
```

TotalAmount

These field(s) use this type: **TotalAmount.**

Total price (cost + markup)

Name	TotalAmount
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

TotalContractAmount

These field(s) use this type: **TotalContractAmount.**

Total amount of the contract.

Name TotalContractAmount

Abstract no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

TotalCost

These field(s) use this type: **TotalCost.**

Value at unit cost times quantity

Name TotalCost

Abstract no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

TotalTaxableAmount

These field(s) use this type: $\underline{\textbf{TotalTaxableAmount.}}$

Total taxable price.

Name TotalTaxableAmount

Abstract no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

TowingAllowance

These field(s) use this type: **TowingAllowance.**

towing alooowance

Name	TowingAllowance
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

Transportation

 $These \ field (s) \ use \ this \ type: \ \underline{\textbf{Transportation, Transportation, Transportation}.}$

Name	Transportation
Abstract	no

Field / Component	Description	R/O	Business Rule
TransportationCarrier	Name of transportation carrier	O	
ReceiptNumber	Numeric identifier found on the carrier's receipt when a vehicle is delivered to the dealer	О	

Field / Component	Description	R/O	Business Rule
VehicleArrivalDate	Date vehicle is delivered to the dealer.	О	In YYYY-MM-DD format.
NotificationDate	Date when dealer contacts OEM to file a transportation claim.	О	In YYYY-MM-DD format
NotificationReason	Indicates why notification to OEM came after the standard 2-day window after the arrival date. Examples: "Delayed inspection": "Concealed damage"	O	
RegisteredMailReceiptNumber	Number identifying the document sent by the dealership to the carrier	О	
MajorDamageCode	Identifies if the vehicle had major damage Examples: Y=Yes, N=No, B=Old Damage	О	
Damage	represents information about damage related to the vehicle	О	

XML Instance Representation

UnitCost

These field(s) use this type: $\underline{UnitCost.}$

Cost at inventory value

Name	UnitCost
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

UnitPrice

These field(s) use this type: **UnitPrice.**

UnitPrice

Name	UnitPrice
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
Amount
</...>
```

UnitSalesTaxAmount

These field(s) use this type: $\underline{\textbf{UnitSalesTaxAmount.}}$

Unit amount of sales tax.

Name	UnitSalesTaxAmount
Abstract	no

```
<...
currency="Currency [1]">
Amount
</...>
```

Vehicle

Name	Vehicle
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Model	Manufacturer-assigned model code of vehicle - Usually available in the VIN number (use NCIC code)	О	
ModelYear	Vehicle designated model year	О	
ModelDescription	Descriptive vehicle model name	O	
Make	Vehicle make code - Usually available in the VIN number (use NCIC code).	О	

XML Instance Representation

```
<...>
    <Model> Model </Model> [0..1]
    <ModelYear> ModelYear </ModelYear> [0..1]
    <ModelDescription> ModelDescription </ModelDescription> [0..1]
    <Make> Make </Make> [0..1]
    </...>
```

VehicleBase

Name	VehicleBase
Abstract	no

Field / Component	Description	R/O	Business Rule
Model	Manufacturer-assigned model code of vehicle - Usually available in the VIN number (use NCIC code)	0	
ModelYear	Vehicle designated model year	О	
ModelDescription	Descriptive vehicle model name	О	
Make	Vehicle make code - Usually available in the VIN number (use NCIC code).	0	
SaleClass	Class of Sale	О	
Condition	Condition of Vehicle - Example: Excellent, Good, Fair, Poor, Unknown	О	
CertifiedPreownedInd	Identifies as a certified Pre-Owned Vehicle	О	
VehicleNote	Any vehicle related notes	О	
VIN	Federally defined 17 position vehicle identification number	О	
DeliveryMileage	Odometer reading of vehicle at time of delivery	О	
VehicleStock	Dealer assigned vehicle stock number	О	
TrimCode	Manufacturer assigned trim code	О	
DoorsQuantity	Number of doors on vehicle	О	
BodyStyle	Manufacturer-assigned vehicle body style	О	
InteriorColor	Vehicle Interior Color(s)	О	
ExteriorColor	Vehicle Exterior Color(s)	О	
TransmissionType	Vehicle Transmission type	О	
OdometerStatus	Status of odometer at trade-in. Example:: Replaced, Tampered, Miles> 90,000, etc.	0	
NonUSVehicleInd	Indicates whether the vehicle was produced for the United States or not	О	
VehicleDemoInd	Indicates whether vehicle was ever a demo	О	
LicenseNumber	State License plate number of vehicle	О	

Field / Component	Description	R/O	Business Rule
BrandedInfo	Vehicle Branding Information	О	
RestrictionInd	Indication that vehicle has restrictions on its use	О	
RestrictionDescription	Description of vehicle use restrictions	О	
TelematicsServiceInd	Indication whether Telematics Service Subscription is turned on	О	

```
<...>
 <Model> Model </Model> [0..1]
 <ModelYear> ModelYear </ModelYear> [0..1]
 < ModelDescription > ModelDescription < / ModelDescription > [0..1]
 <Make> Make </Make> [0..1]
 <SaleClass> SaleClass </SaleClass> [0..1]
 <Condition> Condition </Condition> [0..1]
 <CertifiedPreownedInd> CertifiedPreownedInd </CertifiedPreownedInd> [0..1]
 < VehicleNote > VehicleNote < / VehicleNote > [0..*]
 <VIN> VIN </VIN> [0..1]
 <DeliveryMileage> DeliveryMileage [0..1]
 < VehicleStock > VehicleStock < / VehicleStock > [0..1]
 <TrimCode> TrimCode </TrimCode> [0..1]
 <DoorsQuantity> DoorsQuantity /DoorsQuantity> [0..1]
 <BodyStyle> BodyStyle </BodyStyle> [0..1]
 <InteriorColor> InteriorColor </InteriorColor> [0..*]
 < Exterior Color > Exterior Color < / Exterior Color > [0..*]
 <TransmissionType> TransmissionType </TransmissionType> [0..1]
 <OdometerStatus> OdometerStatus </OdometerStatus> [0..1]
 <NonUSVehicleInd> NonUSVehicleInd </nonUSVehicleInd> [0..1]
 <VehicleDemoInd> VehicleDemoInd </VehicleDemoInd> [0..1]
 <LicenseNumber> LicenseNumber </LicenseNumber> [0..1]
 <BrandedInfo> BrandedInfo </BrandedInfo> [0..1]
 <RestrictionInd> RestrictionInd </RestrictionInd> [0..1]
 <RestrictionDescription> RestrictionDescription 
 <TelematicsServiceInd> TelematicsServiceInd </TelematicsServiceInd> [0..1]
</...>
```

VehicleConcernQuestionAnswer

These field(s) use this type: **VehicleConcernQuestionAnswer.**

Name	VehicleConcernQuestionAnswer
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ConcernQuestion	Service concern question.	О	
ConcernAnswer	Service concern answer	О	

XML Instance Representation

```
<...>
    <ConcernQuestion> ConcernQuestion </ConcernQuestion> [0..1]
    <ConcernAnswer> ConcernAnswer </ConcernAnswer> [0..1]
    </...>
```

Verb

These field(s) use this type: **Verb.**

Name	Verb
Abstract	no

Data Elements and Components

Tiotal Components	Field / Component Desc		R/O	Business Rule
-------------------	------------------------	--	-----	---------------

	· · · · · · · · · · · · · · · · · · ·
<	./>
_	

Warranty

Name	Warranty
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
WarrantyStartMileage	Mileage at start date of vehicle warranty	О	
WarrantyEndMileage	Mileage limit for vehicle warranty coverage for warranty currently in force at time of repair	О	(INACTIVE)
WarrantyStartDate	Start date of vehicle warranty	O	In YYYY-MM-DD format
WarrantyExpirationDate	Last date of vehicle warranty coverage for warranty currently in force a time of repair	t O	(INACTIVE)
RoadsideAssistanceInd	Indicates whether coverage includes roadside assistance	O	(INACTIVE)
MasterShieldInd	Indicates if vehicle is covered by the Master Shield Extended warranty	О	(INACTIVE)
WarrantyTransferInd	Indicates if warranty is transferable	О	(INACTIVE)
WarrantyTypeDescription	Description of type of warranty Example: Basic /Powertrain, etc.	О	(INACTIVE)
WarrantyStatus	Whether warranty is still applicable	О	(INACTIVE)
WarrantyRemaining	Defines how much warranty is left, either in time or miles	О	(INACTIVE)
WarrantyNotes	Any Warranty related Notes	О	(INACTIVE)

XML Instance Representation

<...>

<WarrantyStartMileage> WarrantyStartMileage </WarrantyEndMileage> [0..1]
<WarrantyEndMileage> WarrantyEndMileage </WarrantyEndMileage> [0..1]
<WarrantyStartDate> WarrantyStartDate </WarrantyExpirationDate> [0..1]
<WarrantyExpirationDate> WarrantyExpirationDate </WarrantyExpirationDate> [0..1]
<RoadsideAssistanceInd> RoadsideAssistanceInd </RoadsideAssistanceInd> [0..1]
<MasterShieldInd> MasterShieldInd </masterShieldInd> [0..1]
<WarrantyTransferInd> WarrantyTransferInd </marrantyTransferInd> [0..1]
<WarrantyTypeDescription> WarrantyTypeDescription </marrantyTypeDescription> [0..1]
<WarrantyStatus> WarrantyStatus </marrantyStatus> [0..1]
<WarrantyRemaining> WarrantyRemaining </marrantyRemaining> [0..1]
<WarrantyNotes> WarrantyNotes </warrantyNotes> [0..1]
</m>

WarrantyAdditional

These field(s) use this type: Warranty.

Name	WarrantyAdditional
Abstract	no

Field / Component	Description	R/O	Business Rule
WarrantyStartMileage	Mileage at start date of vehicle warranty	О	
WarrantyEndMileage	Mileage limit for vehicle warranty coverage for warranty currently in force at time of repair	О	(INACTIVE)
WarrantyStartDate	Start date of vehicle warranty	О	In YYYY-MM-DD format
WarrantyExpirationDate	Last date of vehicle warranty coverage for warranty currently in force at time of repair	О	(INACTIVE)
RoadsideAssistanceInd	Indicates whether coverage includes roadside assistance	О	(INACTIVE)
MasterShieldInd	Indicates if vehicle is covered by the Master Shield Extended warranty	О	(INACTIVE)

Field / Component	Description	R/O	Business Rule
WarrantyTransferInd	Indicates if warranty is transferable	О	(INACTIVE)
WarrantyTypeDescription	Description of type of warranty Example: Basic /Powertrain, etc.	О	(INACTIVE)
WarrantyStatus	Whether warranty is still applicable	О	(INACTIVE)
WarrantyRemaining	Defines how much warranty is left, either in time or miles	О	(INACTIVE)
WarrantyNotes	Any Warranty related Notes	О	(INACTIVE)
ReceiptNumber	Numeric identifier found on the carrier's receipt when a vehicle is delivered to the dealer	0	
DelayedInspectionCode	Explains why a vehicle cannot be initially inspected once it arrives at a dealer (ie: dealer closed, no one around to sign for vehicle)	0	
VehicleArrivalDate	The date the original retail vehicle is delivered to a dealer.	O	

```
<mrantyStartMileage> WarrantyStartMileage </WarrantyEndMileage> [0..1]
<WarrantyEndMileage> WarrantyEndMileage </WarrantyEndMileage> [0..1]
<WarrantyStartDate> WarrantyStartDate </WarrantyStartDate> [0..1]
<WarrantyExpirationDate> WarrantyExpirationDate> (WarrantyExpirationDate> [0..1]
<RoadsideAssistanceInd> RoadsideAssistanceInd </RoadsideAssistanceInd> [0..1]
<MasterShieldInd> MasterShieldInd </MasterShieldInd> [0..1]
<WarrantyTransferInd> WarrantyTransferInd </WarrantyTransferInd> [0..1]
<WarrantyTypeDescription> WarrantyTypeDescription 
<WarrantyTypeDescription> WarrantyStatus> (WarrantyStatus> [0..1]
<WarrantyRemaining> WarrantyRemaining> (WarrantyRemaining> [0..1]
<WarrantyNotes> WarrantyNotes 
<WarrantyNotes> [0..1]
<ReceiptNumber> ReceiptNumber 
<ReceiptNumber> ReceiptNumber> ReceiptNumber> [0..1]
<DelayedInspectionCode> DelayedInspectionCode 
DelayedInspectionCode> [0..1]
<VehicleArrivalDate> VehicleArrivalDate 
<VehicleArrivalDate> VehicleArrivalDate> [0..1]
```

WarrantyBase

Name	WarrantyBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
WarrantyStartMileage	Mileage at start date of vehicle warranty	O	
WarrantyEndMileage	Mileage limit for vehicle warranty coverage for warranty currently in force at time of repair	О	(INACTIVE)
WarrantyStartDate	Start date of vehicle warranty	О	In YYYY-MM-DD format
WarrantyExpirationDate	Last date of vehicle warranty coverage for warranty currently in force at time of repair	О	(INACTIVE)
RoadsideAssistanceInd	Indicates whether coverage includes roadside assistance	О	(INACTIVE)
MasterShieldInd	Indicates if vehicle is covered by the Master Shield Extended warranty	О	(INACTIVE)
WarrantyTransferInd	Indicates if warranty is transferable	О	(INACTIVE)
WarrantyTypeDescription	Description of type of warranty Example: Basic /Powertrain, etc.	О	(INACTIVE)
WarrantyStatus	Whether warranty is still applicable	О	(INACTIVE)
WarrantyRemaining	Defines how much warranty is left, either in time or miles	О	(INACTIVE)
WarrantyNotes	Any Warranty related Notes	О	(INACTIVE)

XML Instance Representation

<...>

```
<WarrantyStartMileage> WarrantyEndMileage </WarrantyEndMileage> [0..1]
<WarrantyEndMileage> WarrantyEndMileage </WarrantyEndMileage> [0..1]
<WarrantyStartDate> WarrantyStartDate </WarrantyExpirationDate> [0..1]
<WarrantyExpirationDate> WarrantyExpirationDate </WarrantyExpirationDate> [0..1]
<RoadsideAssistanceInd> RoadsideAssistanceInd </RoadsideAssistanceInd> [0..1]
<MasterShieldInd> MasterShieldInd </MasterShieldInd> [0..1]
<WarrantyTransferInd> WarrantyTransferInd </WarrantyTransferInd> [0..1]
<WarrantyTypeDescription> WarrantyTypeDescription 
</WarrantyTypeDescription> [0..1]
<WarrantyStatus> WarrantyStatus 
</WarrantyRemaining> WarrantyRemaining 
</warrantyNotes> WarrantyNotes> [0..1]
```

WarrantyClaim

These field(s) use this type: WarrantyClaim, WarrantyClaim.

Name	WarrantyClaim	
Abstract	no	

Field / Component	Description	R/O	Business Rule
ClaimNumber	Identifier of claim entered by dealer	О	
ClaimType	Identifier of the type of claim	О	
OEMClaimNumber	Assigned by OEM at time of claim processing	О	
ExternalReferenceNumber	Secondary identifying scheme that is meaningful to claimant	О	
FreightClaimNumber	The claim number of the freight claim associated with the current warranty claim	O	
AccessoryClaimType	Manufacturer identifier of the type of accessory claim	О	
DefectCode	Manufacturer assigned code that defines failed component that caused the claim	О	

Field / Component	Description	R/O	Business Rule
ItemId	Primary part responsible for vehicle failure	О	
PartType	Specifies whether the parts are indicated by manufacturer part code or Part Number	О	
SparePartDate	The date the part was purchased	O	
SparePartInvoiceNumber	The invoice number on which the part was sold over the counter	О	
SparePartMileage	Mileage at which the failed part was originally installed	О	
WarrantyAppealInd	Warranty Appeal indicator	О	
ServiceCampaign	Service Campaign information related to vehicle service	O	
CodesAndComments	Codes and Comments related to vehicle service	О	
PartDealerNumer	Identification number for party that installed failed part	О	
PartDealerName	Name of the dealer/business that installed failed part	О	(INACTIVE)
DealerInstallationInd	Indicates whether or not the dealership installed the part	О	Values: 1 - Yes, 0 - No
BatteryProration	Denotes life of the new battery in months	О	
OEMVehicleInd	Indicates whether or not the part was installed on an OEM vehicle	О	Values: 1 - Yes, 0 - No
WarrantyProgramCode	Code for manufacturer Warranty special programs	О	
ClaimCategory	Secondary classification of claim reimbursement (e.g., Manufacturer Warranty, Service Contract, Transportation, Chargeback, Resubmission etc.)	, O	(INACTIVE)
AuthorizationNumber	Assigned authorization number for claim	О	
AuthorizationCode	Assigned authorization code or additional authorization number for claim	mO	
AuthorizationPayMaximum	Maximum Price covered by Authorization	О	(INACTIVE)
AuthorizationPayPercent	Payment Percentage covered by Authorization	О	(INACTIVE)

Field / Component	Description	R/O	Business Rule
AuthorizationPayType	Payment Type covered by Authorization	О	(INACTIVE)
Price	Prices related to Warranty Claim	0	
Tax	Taxes related to Warranty Claim	О	
AppealReasonCode	Code defining reason for appeal	О	(INACTIVE)
ManualReviewCode	Code to signal requirement for manual review by claim analyst	О	(INACTIVE)
SubDealerNumber	International Dealer code for whom Distributors enter claims	О	
DataCollectionStatus	Indicates status of data for the record it appears on	О	(INACTIVE)
ClaimSubmissionCount	Tracks number of times claim has been submitted to manufacturer (i.e., Value will be 0 or null if claim is not ready to be sent	0	(INACTIVE)
OriginalRepairOrderNumber	References Original Repair Order number	О	(INACTIVE)
Splits	Warranty Claim Splits total	О	
RentLoaner	Rent Loaner related to Warranty Claim	О	
ServiceComponents	Service Components related to Warranty Claim	О	(INACTIVE)
Transportation	Transportation related to Warranty Claim	О	(INACTIVE)
Sublet	Sublet related to Warranty Claim	О	
Job	Jobs related to Warranty Claim	O	You can use WarrantyClaim on Job or Job on WarrantyClaim, but as a Best Practice you should not use both on the same RepairOrder.
JobReferback	Job Referback related to Warranty Claim	О	(INACTIVE)
WarrantyClaimDeductible	Deductible information associated with Warranty Claim	0	

Field / Component	Description F	R/O	Business Rule
PriorClaimNumber	Original claim number for a claim that being continued. In other words, a claim was entered and paid, but something was forgotten. The dealer can then continue the claim using a different claim number and this is the original claim number.	O	(INACTIVE)
ClaimContinuationCode	Code describing why claim is continued. (i.e., $N = Not$ a continuation claim $P = Parts$ continuation claim $R = Reman$ Continuation claim $O = Other$ continuation claim)	0	(INACTIVE)
TreadActInd	Transportation Recall Enhancement, Accountability, and Documentation (TREAD) Act (i.e., - Indicates if there has been fire damage)	O	(INACTIVE)
LaborOperationId	Labor Operation Id that caused this claim.	O	

```
<ClaimNumber> ClaimNumber </ClaimNumber> [0..1]
<ClaimType> ClaimType </ClaimType> [0..1]
<OEMClaimNumber> OEMClaimNumber </OEMClaimNumber> [0..1]
<ExternalReferenceNumber> ExternalReferenceNumber /ExternalReferenceNumber> [0..1]
<FreightClaimNumber> FreightClaimNumber /FreightClaimNumber> [0..1]
<AccessoryClaimType> AccessoryClaimType </AccessoryClaimType> [0..1]
<DefectCode> DefectCode </DefectCode> [0..1]
<ItemId> ItemId </ItemId> [0..1]
<PartType> PartType </PartType> [0..1]
<SparePartDate> SparePartDate </SparePartDate> [0..1]
<SparePartInvoiceNumber> SparePartInvoiceNumber 
<SparePartMileage> SparePartMileage </SparePartMileage> [0..1]
<WarrantyAppealInd> WarrantyAppealInd </WarrantyAppealInd> [0..1]
<ServiceCampaign> ServiceCampaignExtended </ServiceCampaign> [0..*]
<CodesAndComments> CodesAndComments </CodesAndComments> [0..1]
<PartDealerNumer> PartDealerNumer /PartDealerNumer> [0..1]
<PartDealerName> PartDealerName </PartDealerName> [0..1]
<DealerInstallationInd> DealerInstallationInd /DealerInstallationInd> [0..1]
<BatteryProration> BatteryProration </BatteryProration> [0..1]
<OEMVehicleInd> OEMVehicleInd </OEMVehicleInd> [0..1]
```

```
<WarrantyProgramCode> WarrantyProgramCode </WarrantyProgramCode> [0..1]
 <ClaimCategory> ClaimCategory </ClaimCategory> [0..1]
 <AuthorizationNumber> AuthorizationNumber /AuthorizationNumber> [0..1]
 <a href="AuthorizationCode"></authorizationCode</authorizationCode</a> [0..1]
 <AuthorizationPayMaximum> AuthorizationPayMaximum </AuthorizationPayMaximum> [0..1]
 < AuthorizationPayPercent > AuthorizationPayPercent < / AuthorizationPayPercent > [0..1]
 <AuthorizationPayType> AuthorizationPayType </AuthorizationPayType> [0..1]
 <Price> Price </Price> [0..*]
 < Tax > Tax < / Tax > [0..*]
 <AppealReasonCode> AppealReasonCode </AppealReasonCode> [0..1]
 <ManualReviewCode> ManualReviewCode </ManualReviewCode> [0..1]
 <SubDealerNumber> SubDealerNumber SubDealerNumber> [0..1]
 <DataCollectionStatus> DataCollectionStatus </DataCollectionStatus> [0..1]
 <ClaimSubmissionCount> ClaimSubmissionCount </ClaimSubmissionCount> [0..1]
 <OriginalRepairOrderNumber> OriginalRepairOrderNumber 
 <Splits> Splits </Splits> [0..1]
 <RentLoaner> RentLoaner </RentLoaner> [0..*]
 <ServiceComponents> ServiceComponents </ServiceComponents> [0..*]
 <Transportation> Transportation </Transportation> [0..*]
 <Sublet> Sublet </Sublet> [0..*]
 <Job> Job </Job> [0..*]
 <JobReferback> JobReferback </JobReferback> [0..*]
 <WarrantyClaimDeductible> WarrantyClaimDeductible </WarrantyClaimDeductible> [0..*]
 <PriorClaimNumber> PriorClaimNumber </priorClaimNumber> [0..1]
 <ClaimContinuationCode> ClaimContinuationCode> [0..1]
 <TreadActInd> TreadActInd </TreadActInd> [0..1]
 <LaborOperationId> LaborOperationId </LaborOperationId> [0..1]
</...>
```

WarrantyClaimBase

Name	WarrantyClaimBase
Abstract	no

Field / Component	Description	R/O	Business Rule
ClaimNumber	Identifier of claim entered by dealer	О	
ClaimType	Identifier of the type of claim	О	
OEMClaimNumber	Assigned by OEM at time of claim processing	О	
ExternalReferenceNumber	Secondary identifying scheme that is meaningful to claimant	О	

XML Instance Representation

WarrantyClaimDeductible

These field(s) use this type: WarrantyClaimDeductible.

Name	WarrantyClaimDeductible
Abstract	no

Field / Component	Description	R/O	Business Rule
DeductibleType	The type of customer deductible. Eg: Service Contract	О	
DeductibleAmount	The Customer Deductible and/or Co/pay amount factored out of the total Claim Amount. Eg:\$50.00	0	
Тах	Amount of tax on Warranty Claim for Claim and Dealer	О	
DeductibleWaiverInd	Indicates that the dealer waivered the deductible or changed the deductible from an amount greater than zero to zero.	О	Values: 1 - Yes, 0 - No

XML Instance Representation

WarrantyClaimHistory

Name	WarrantyClaimHistory
Abstract	no

Field / Component	Description	R/O	Business Rule
ClaimNumber	Identifier of claim entered by dealer	О	
ClaimType	Identifier of the type of claim	О	
OEMClaimNumber	Assigned by OEM at time of claim processing	О	
ExternalReferenceNumber	Secondary identifying scheme that is meaningful to claimant	О	
FreightClaimNumber	The claim number of the freight claim associated with the current warranty claim	О	
AccessoryClaimType	Manufacturer identifier of the type of accessory claim	О	
DefectCode	Manufacturer assigned code that defines failed component that caused the claim	О	
ItemId	Primary part responsible for vehicle failure	О	
PartType	Specifies whether the parts are indicated by manufacturer part code or Part Number	О	
SparePartDate	The date the part was purchased	О	

Field / Component	Description	R/O	Business Rule
SparePartInvoiceNumber	The invoice number on which the part was sold over the counter	О	
SparePartMileage	Mileage at which the failed part was originally installed	О	
WarrantyAppealInd	Warranty Appeal indicator	О	
ServiceCampaign	Service Campaign information related to vehicle service	О	
CodesAndComments	Codes and Comments related to vehicle service	0	

XML Instance Representation

```
<...>
 <ClaimNumber> ClaimNumber </ClaimNumber> [0..1]
 <ClaimType> ClaimType </ClaimType> [0..1]
 <OEMClaimNumber> OEMClaimNumber </OEMClaimNumber> [0..1]
 <ExternalReferenceNumber> ExternalReferenceNumber </ExternalReferenceNumber> [0..1]
 <FreightClaimNumber> FreightClaimNumber /FreightClaimNumber> [0..1]
 <AccessoryClaimType> AccessoryClaimType </AccessoryClaimType> [0..1]
 <DefectCode> DefectCode </DefectCode> [0..1]
 <ItemId> ItemId </ItemId> [0..1]
 <PartType> PartType </PartType> [0..1]
 <SparePartDate> SparePartDate </SparePartDate> [0..1]
 <SparePartInvoiceNumber> SparePartInvoiceNumber </SparePartInvoiceNumber> [0..1]
 <SparePartMileage> SparePartMileage </SparePartMileage> [0..1]
 <WarrantyAppealInd> WarrantyAppealInd </WarrantyAppealInd> [0..1]
 <ServiceCampaign> ServiceCampaignExtended </ServiceCampaign> [0..*]
 <CodesAndComments> CodesAndComments </CodesAndComments> [0..1]
```

WarrantyEndMileage

These field(s) use this type: WarrantyEndMileage.

Mileage limit for vehicle warranty coverage for warranty currently in force at time of repair

Name	WarrantyEndMileage	
------	--------------------	--

Abstract

no

XML Instance Representation

```
<....
uom="MileageMeasure [0..1]">
Mileage
</...>
```

WarrantyPercent

These field(s) use this type: WarrantyPercent.

Percentage paid by OEM

Name WarrantyPercent

Abstract no

XML Instance Representation

<...>
 Percent </...>

WarrantyStartMileage

These field(s) use this type: WarrantyStartMileage.

Mileage at start Date of vehicle warranty

Name WarrantyStartMileage

Abstract no

XML Instance Representation

<...
uom="MileageMeasure [0..1]">
Mileage



WarrantyTypeDescription

These field(s) use this type: WarrantyTypeDescription.

A code used to classify into coverage categories

Name	WarrantyTypeDescription
Abstract	no

XML Instance Representation

```
<...
language="Language [0..1]">
Description
</...>
```

AccessoryClaimType

These field(s) use this type: **AccessoryClaimType.**

Manufacturer identifier of the type of accessory claim

Name	AccessoryClaimType
------	--------------------

Base XSD Type: string

ACCompressorSerialNumber

These field(s) use this type: **ACCompressorSerialNumber.**

Serial number of the AC Compressor

Base XSD Type: string

AdditionalHoursLaborComment

These field(s) use this type: **Additional Hours Labor Comment.**

Explanation for the need for the additional labor hours

Name Additional Hours Labor Comment

Base XSD Type: string

AddOnRepairInd

These field(s) use this type: **AddOnRepairInd.**

AddOnRepairInd

Name	AddOnRepairInd
*Base XSD Type: string	
Code Value	Description
0	
1	

AddressLine

These field(s) use this type: **AddressLine.**

Indicates the multiple lines of an address. The first line is typically the street name and number.

Name AddressLine

Base XSD Type: string

AddressQualifier

Address Qualifier

Name	AddressQualifier		
Base XSD Type: string	Base XSD Type: string		
Code Value		Description	
WorkAddress		Work Address	
SeasonalAddress		Seasonal Address	
DeliveryAddress		Delivery Address	
HomeAddress		Home Address	
PreviousAddress		Previous Address	
Other		Other	
Garage		Garage	
Billing		Billing	
NonSigningSpouseAddress		Non Signing Spouse Address	
N/A		Not Applicable	

AppealActionCode

 $These \ field (s) \ use \ this \ type: \\ \underline{\textbf{AppealActionCode,} \textbf{AppealActionCode,} \textbf{Appe$

Defines action to be taken on appeal

Name AppealActionCode

Base XSD Type: string

AppealReasonCode

These field(s) use this type: **AppealReasonCode.**

Code defining reason for appeal

Name AppealReasonCode

Base XSD Type: string

AreaCode

These field(s) use this type: <u>AreaCode.</u>
Physical location of damage on the vehicle

Name AreaCode

Base XSD Type: string

AssigningOrganizationPartyId

These field(s) use this type: **AssigningPartyId.**

Assigning Organization Party Id

Name	AssigningOrganizationPartyId
Base XSD Type: string	
Code Value	Description
LegalId	Legal ID
NationalId	Government-assigned ID such as a social security Number
Other	Other
DUNS	Dun and Bradstreet
MotorDealerRegistrationId	Department of Motor Vehicle Registration number for a dealer. This is the dealer's license number to do business.
GSTRegistrationId	Canadian Goods and Services Tax Id.
HSTRegistrationId	Canadian HarmonizedTax Id.

Code Value	Description
Certification Of Registration Id	Id of the certificate of registration assigned to a business to allow that business to collect and remit certain taxes or fees to a state.
QSTRegistrationId	Quebec sales tax id.

AssigningPartyld

These field(s) use this type: **AssigningPartyId.**

Agency or entity that validates the Party Id

Name	AssigningPartyId
Base XSD Type: string	
Code Value	Description
LegalId	Legal ID
DriversLicense	Drivers License
NationalId	Government-assigned ID such as a social security Number
Other	Other
GSTRegistrationId	Canadian Goods and Services Tax Id.
HSTRegistrationId	Canadian HarmonizedTax Id.
PreviousAccountNumber	
QSTRegistrationId	Quebec sales tax id.
QSTRegistrationId	Quebec sales tax id.

AuthorizationCode

These field(s) use this type: **<u>AuthorizationCode.</u>**

Assigned authorization code

Name

AuthorizationCode

Base XSD Type: string

AuthorizationNumber

These field(s) use this type: **AuthorizationNumber, AuthorizationNumber.**

Authorization Number

Name

AuthorizationNumber

Base XSD Type: string

AuthorizationPayType

These field(s) use this type: **AuthorizationPayType.**

Payment Type covered by Authorization

Name

AuthorizationPayType

Base XSD Type: string

AxleCode

These field(s) use this type: **AxleCode**.

The code on the axle of the vehicle.

Name

AxleCode

Base XSD Type: string

BatteryWarrantyCode

These field(s) use this type: **BatteryWarrantyCode**.

Warranty code generated by battery tester to define the failure type of the battery (i.e., Midtronics)

Name BatteryWarrantyCode

Base XSD Type: string

BirthDate

These field(s) use this type: **BirthDate.**

Birth date of party

Name BirthDate

Base XSD Type: date

BodyStyle

These field(s) use this type: **BodyStyle.**Manufacturer-assigned vehicle body style

Name BodyStyle

Base XSD Type: string

BrandedTitleDate

These field(s) use this type: **BrandedTitleDate.**

Branding Date

Name BrandedTitleDate

Base XSD Type: date

BrandedTitleInd

These field(s) use this type: **BrandedTitleInd.**

This tag indicates if a vehicle's title has been branded. (i.e., vehicle totaled and state registration title branded as such)

Name	BrandedTitleInd		
Base XSD Type: string			
Code Value	Description		
0			
1			

BrandingSource

These field(s) use this type: **BrandingSource.**

Branding source (i.e., source who says that the vehicle is branded)

Name BrandingSource

Base XSD Type: string

BrandingStateReference

These field(s) use this type: **BrandingStateReference.**

Branding State Reference Number

Name BrandingStateReference

Base XSD Type: string

BusinessCenter

These field(s) use this type: **BusinessCenter.**

Identification of business area. Example: grouping of zones

Name

BusinessCenter

Base XSD Type: string

CampaignDispositionCode

These field(s) use this type: **CampaignDispositionCode**.

A campaign related field specifying the disposition of a campaign Ex: completed, open, etc.

Name

CampaignDispositionCode

Base XSD Type: string

CampaignNotes

These field(s) use this type: **CampaignNotes.**

Free form comments related to campaign

Name

CampaignNotes

Base XSD Type: string

CampaignNumber

These field(s) use this type: **CampaignNumber.**

Manufacturer assigned campaign number

Name

CampaignNumber

Base XSD Type: string

CampaignOptionCode

These field(s) use this type: **CampaignOptionCode.**

Manufacturer assigned Campaign Option Code

Name CampaignOptionCode

Base XSD Type: string

${\bf Campaign Reimbur sement Code}$

These field(s) use this type: **CampaignReimbursementCode.**

A campaign related field specifying the reimbursement code for a campaign service. Reimbursement codes denote the mix of part and labor operations the dealer used to perform the service. Ex: Numeric value between 1 and 9

Name CampaignReimbursementCode

Base XSD Type: string

CaseNumber

These field(s) use this type: **CaseNumber.**

Case number

Name CaseNumber

Base XSD Type: string

CaseOpenDate

These field(s) use this type: **CaseOpenDate.**

Case open date

Name CaseOpenDate

Base XSD Type: date

CaseOwner

These field(s) use this type: **CaseOwner.**

Case Owner

Name CaseOwner

Base XSD Type: string

CaseReasonNarrative

These field(s) use this type: <u>CaseReasonNarrative</u>.

Case Reason Narrative

Name CaseReasonNarrative

Base XSD Type: string

CaseType

These field(s) use this type: $\underline{\textbf{CaseType.}}$

Type of Customer Arbitration Intervention or legal action

Name	СаѕеТуре		
Base XSD Type: stri	ng		
Code Value		Description	
Arbitration			
Legal			
Technical Analysis			

Customer Relations

Better Business

Code Value	Description
Other	Other

CauseCode

These field(s) use this type: <u>CauseCode</u>.

Manufacturer assigned reasonfor failure

Name CauseCode

Base XSD Type: string

CertifiedPreownedInd

These field(s) use this type: **CertifiedPreownedInd.**

Identifies as a certified Pre-Owned Vehicle

Name	CertifiedPreownedInd	
Base XSD Type: string		
Code Value	due Description	
$\overline{0}$		
1		

City

These field(s) use this type: **City.**

City of the Address.

Name City

Base XSD Type: string

ClaimCategory

These field(s) use this type: **ClaimCategory.**

Secondary classification of claim reimbursement (e.g., Manufacturer Warranty, Service Contract, Transportation, Chargeback, Resubmission, etc.)

Name ClaimCategory

Base XSD Type: string

ClaimContinuationCode

These field(s) use this type: **ClaimContinuationCode**.

Code describing why claim is continued. (i.e., N = Not a continuation claim P = Parts continuation claim R = Reman Continuation claim O = Other continuation claim)

Name ClaimContinuationCode

Base XSD Type: string

ClaimNumber

These field(s) use this type: **ClaimNumber.**

Identifier of claim entered by dealer

Name ClaimNumber

Base XSD Type: string

ClaimType

These field(s) use this type: ClaimType.

Identifier of the type of claim

Name

ClaimType

Base XSD Type: string

Code

These field(s) use this type: **BODId.**

Unique code name

Name

Code

Base XSD Type: string

CompanyName

These field(s) use this type: **Name.**

Company name of customer

Name

CompanyName

Base XSD Type: string

ComplaintCode

These field(s) use this type: **ComplaintCode.**

Customer complaint category

Name

ComplaintCode

Base XSD Type: string

ComplaintCodeType

These field(s) use this type: **ComplaintCodeType.**

Type of problem as related to the CustomerComplaintCode.

Name ComplaintCodeType

Base XSD Type: string

ComplaintPriority

These field(s) use this type: **ComplaintPriority.**

Priority from customer's view for specific complaint.

Name ComplaintPriority

Base XSD Type: string

CompleteIncomplete

Status of Information transaction being sent C = Complete, I = Incomplete

Name CompleteIncomplete

Base XSD Type: string

Code Value Description

C

I

ComponentType

These field(s) use this type: **ComponentType.**

Component Type

Name ComponentType

Base XSD Type: string

Code Value	Description	
Miscellaneous		
GasOilGrease		
PaintMaterials		
ShopSupplies		
Freight		
Other	Other	

ConcernAnswer

These field(s) use this type: **ConcernAnswer.**

Service concern answer.

Name ConcernAnswer

Base XSD Type: string

ConcernQuestion

These field(s) use this type: **ConcernQuestion.**

Service concern question.

Name ConcernQuestion

Base XSD Type: string

Condition

These field(s) use this type: **Condition.**

Condition of Vehicle - Example: Excellent, Good, Fair, Poor, Unknown

Name	Condition
------	-----------

Base XSD Type: string

ConfirmType

Name	ConfirmType	
Base XSD Type: NMTOKEN		
Code Value	Description	
Always		
OnChange		
Never		

${\bf Contact Telephone Number Description}$

Contact Telephone Number Description

Name	ContactTelephoneNumberDescription
Base XSD Type: string	
Code Value	Description
Evening Phone	Evening Phone
Day Phone	Day Phone
Cell Phone	Cell Phone
Pager	Pager
Other	Other

${\bf Contact Telephone Number Organization Description}$

Contact Telephone Number Organization Description

Name	ContactTelephoneNumberOrganizationDescription
Base XSD Type: string	
Code Value	Description
Day Phone	Day Phone
Cell Phone	Cell Phone
Pager	Pager
Other	Other

ContactTime

These field(s) use this type: **ContactTime,ContactTime.**

Preferred contact time (i.e. Best day/time to reach the contact.

Name	ContactTime
------	-------------

Base XSD Type: string

ContractCompanyName

These field(s) use this type: **ContractCompanyName.**

Contract company name

Na	ame	ContractCompanyName
----	-----	---------------------

Base XSD Type: string

ContractEffectiveDate

These field(s) use this type: **ContractEffectiveDate.**

Start Date of Service Contract

Name ContractEffectiveDate

Base XSD Type: date

ContractExpirationDate

These field(s) use this type: **ContractExpirationDate.**

Date the contract expires

Name ContractExpirationDate

Base XSD Type: date

ContractNote

These field(s) use this type: **ContractNote.**

Free form comments that relate to the contract

Name ContractNote

Base XSD Type: string

ContractOwnerName

These field(s) use this type: **ContractOwnerName.**

Name on service Contract (i.e., full name - First Last)

Name ContractOwnerName

Base XSD Type: string

ContractPlanCode

These field(s) use this type: **ContractPlanCode**.

Contract Plan Code

Name

ContractPlanCode

Base XSD Type: string

ContractPlanStates

These field(s) use this type: **ContractPlanStates.**

States where the plan is valid

Name

ContractPlanStates

Base XSD Type: string

ContractStartDate

These field(s) use this type: **ContractStartDate.**

Contract sale Date

Name

ContractStartDate

Base XSD Type: date

ContractTransferInd

These field(s) use this type: **ContractTransferInd.**

Indicates if the contract is transferable

Name

ContractTransferInd

Base XSD Type: string

Code Value	Description
0	
1	

ContractTransferredInd

These field(s) use this type: **ContractTransferredInd.**

Indicates if the contract has been transferred

Name	ContractTransferredInd	
Base XSD Type: string		
Code Value	Description	
0		
1		

${\bf Contract Trip Interrupt Ind}$

These field(s) use this type: **ContractTripInterruptInd.**

Indicates if the contract allows for trip interruption

Name	ContractTripInterruptInd	
Base XSD Type: string		
Code Value	Description	
0		
1		

ContractType

These field(s) use this type: **ContractType.**

Contract type and/or area of coverage

Name

ContractType

Base XSD Type: string

Country

These field(s) use this type: **DealerCountry, DealerCountry, Country.**

Country in which the Address is in. Conforms to ISO 3166-2. AF -AFGHANISTAN AL -ALBANIA DZ -ALGERIA AS -AMERICAN SAMOA AD -ANDORRA AO -ANGOLA AI -ANGUILLA AQ -ANTARCTICA AG -ANTIGUA AND BARBUDA AR -ARGENTINA AM -ARMENIA AW -ARUBA AU -AUSTRALIA AT -AUSTRIA AZ -AZERBAIJAN BS -BAHAMAS BH -BAHRAIN BD -BANGLADESH BB -BARBADOS BY -BELARUS BE -BELGIUM BZ -BELIZE BJ -BENIN BM -BERMUDA BT -BHUTAN BO -BOLIVIA BA -BOSNIA AND HERZEGOVINA BW -BOTSWANA BV -BOUVET ISLAND BR -BRAZIL IO-BRITISH INDIAN OCEAN TERRITORY BN -BRUNEI DARUSSALAM BG -BULGARIA BF-BURKINA FASO BI-BURUNDI KH-CAMBODIA CM-CAMEROON CA-CANADA CV-CAPE VERDE KY-CAYMAN ISLANDS CF -CENTRAL AFRICAN REPUBLIC TD -CHAD CL -CHILE CN -CHINA CX -CHRISTMAS ISLAND CC -COCOS (KEELING) ISLANDS CO -COLOMBIA KM -COMOROS CG -CONGO CD -CONGO, THE DEMOCRATIC REPUBLIC OF THE CK -COOK ISLANDS CR -COSTA RICA CI -CÃ#Â#TE D'IVOIRE HR -CROATIA CU -CUBA CY -CYPRUS CZ -CZECH REPUBLIC DK -DENMARK DJ -DJIBOUTI DM -DOMINICA DO -DOMINICAN REPUBLIC EC -ECUADOR EG -EGYPT SV -EL SALVADOR GO -EOUATORIAL GUINEA ER -ERITREA EE -ESTONIA ET -ETHIOPIA FK -FALKLAND ISLANDS (MALVINAS) FO -FAROE ISLANDS FJ -FIJI FI -FINLAND FR -FRANCE GF -FRENCH GUIANA PF -FRENCH POLYNESIA TF -FRENCH SOUTHERN TERRITORIES GA -GABON GM -GAMBIA GE -GEORGIA DE -GERMANY GH -GHANA GI -GIBRALTAR GR -GREECE GL -GREENLAND GD -GRENADA GP -GUADELOUPE GU -GUAM GT -GUATEMALA GN -GUINEA GW -GUINEA-BISSAU GY -GUYANA HT -HAITI HM -HEARD ISLAND AND MCDONALD ISLANDS VA -HOLY SEE (VATICAN CITY STATE) HN -HONDURAS HK -HONG KONG HU -HUNGARY IS -ICELAND IN -INDIA ID -INDONESIA IR -IRAN, ISLAMIC REPUBLIC OF IO -IRAO IE -IRELAND IL -ISRAEL IT -ITALY JM -JAMAICA JP -JAPAN JO -JORDAN KZ -KAZAKHSTAN KE -KENYA KI -KIRIBATI KP -KOREA, DEMOCRATIC PEOPLE'S REPUBLIC OF KR -KOREA, REPUBLIC OF KW -KUWAIT KG -KYRGYZSTAN LA -LAO PEOPLE'S DEMOCRATIC REPUBLIC LV -LATVIA LB -LEBANON LS -LESOTHO LR -LIBERIA LY -LIBYAN ARAB JAMAHIRIYA LI -LIECHTENSTEIN LT -LITHUANIA LU -LUXEMBOURG MO -MACAO MK -MACEDONIA, THE FORMER YUGOSLAV REPUBLIC OF MG -MADAGASCAR MW -MALAWI MY -MALAYSIA MV -MALDIVES ML -MALI MT -MALTA MH -MARSHALL ISLANDS MO -MARTINIOUE MR -MAURITANIA MU -MAURITIUS YT -MAYOTTE MX -MEXICO FM -MICRONESIA, FEDERATED STATES OF MD -MOLDOVA, REPUBLIC OF MC -MONACO MN -MONGOLIA MS -MONTSERRAT MA -MOROCCO MZ -MOZAMBIQUE MM -MYANMAR NA -NAMIBIA NR -NAURU NP -NEPAL NL -NETHERLANDS AN -NETHERLANDS ANTILLES NC -NEW CALEDONIA NZ -NEW ZEALAND NI -NICARAGUA NE -NIGER NG -NIGERIA NU -NIUE NF -NORFOLK ISLAND MP -NORTHERN MARIANA ISLANDS NO -NORWAY OM -OMAN PK -PAKISTAN PW

-PALAU PS -PALESTINIAN TERRITORY, OCCUPIED PA -PANAMA PG -PAPUA NEW GUINEA PY -PARAGUAY PE -PERU PH -PHILIPPINES PN -PITCAIRN PL -POLAND PT -PORTUGAL PR -PUERTO RICO QA -QATAR RE -RÃ#Â#UNION RO -ROMANIA RU -RUSSIAN FEDERATION RW -RWANDA SH -SAINT HELENA KN -SAINT KITTS AND NEVIS LC -SAINT LUCIA PM -SAINT PIERRE AND MIQUELON VC -SAINT VINCENT AND THE GRENADINES WS -SAMOA SM -SAN MARINO ST -SAO TOME AND PRINCIPE SA -SAUDI ARABIA SN -SENEGAL CS -SERBIA AND MONTENEGRO SC -SEYCHELLES SL -SIERRA LEONE SG -SINGAPORE SK -SLOVAKIA SI -SLOVENIA SB -SOLOMON ISLANDS SO -SOMALIA ZA -SOUTH AFRICA GS -SOUTH GEORGIA AND THE SOUTH SANDWICH ISLANDS ES -SPAIN LK -SRI LANKA SD -SUDAN SR -SURINAME SJ -SVALBARD AND JAN MAYEN SZ -SWAZILAND SE -SWEDEN CH -SWITZERLAND SY -SYRIAN ARAB REPUBLIC TW -TAIWAN, PROVINCE OF CHINA TJ -TAJIKISTAN TZ -TANZANIA, UNITED REPUBLIC OF TH -THAILAND TL -TIMOR-LESTE TG - TOGO TK -TOKELAU TO -TONGA TT -TRINIDAD AND TOBAGO TN -TUNISIA TR -TURKEY TM -TURKMENISTAN TC -TURKS AND CAICOS ISLANDS TV -TUVALU UG -UGANDA UA -UKRAINE AE -UNITED ARAB EMIRATES GB -UNITED KINGDOM US -UNITED STATES UM -UNITED STATES MINOR OUTLYING ISLANDS UY -URUGUAY UZ -UZBEKISTAN VU -VANUATU VE -VENEZUELA VN -VIET NAM VG -VIRGIN ISLANDS, BRITISH VI -VIRGIN ISLANDS, U.S. WF -WALLIS AND FUTUNA EH -WESTERN SAHARA YE -YEMEN ZM -ZAMBIA ZW -ZIMBABWE

Name	Country	
Base XSD Type: string		
Code Value	Description	
US		
AF		
AL		
DZ		
AS		
AD		
AO		
AI		
AQ		
AG		
AR		
AM		

2727	
Code Value	Description
AW	
AU	
AT	
AZ	
BS	
вн	
BD	
BB	
BY	
BE	
BZ	
ВЈ	
BM	
BT	
ВО	
BA	
BW	
BV	
BR	
IO	
BN	
BG	

Code Value	Description
BF	
BI	
КН	
CM	
CA	
CV	
KY	
CF	
TD	
CL	
CN	
CX	
CC	
СО	
KM	
CG	
CD	
CK	
CR	
CI	
HR	
CU	

Code Value	Description
CY	
CZ	
DK	
DJ	
DM	
DO	
EC	
EG	
SV	
GQ	
ER	
EE	
ET	
FK	
FO	
FJ	
FI	
FR	
GF	
PF	
TF	
GA	

Code Value	Description
GM	
GE	
DE	
GH	
GI	
GR	
GL	
GD	
GP	
GU	
GT	
GN	
GW	
GY	
HT	
HM	
VA	
HN	
НК	
HU	
IS	
IN	

Code Value	Description
ID	
IR	
IQ	
IE	
IL	
IT	
JM	
JP	
lO	
KZ	
KE	
KI	
KP	
KR	
KW	
KG	
LA	
LV	
LB	
LS	
LR	
LY	

Code Value	Description
LI	<u> </u>
LT	
LU	
MO	
MK	
MG	
MW	
MY	
MV	
ML	
MT	
MH	
MQ	
MR	
MU	
YT	
MX	
FM	
MD	
MC	
MN	
MS	

G I W I	
Code Value	Description
MA	
MZ	
MM	
NA	
NR	
NP	
NL	
AN	
NC	
NZ	
NI	
NE	
NG	
NU	
NF	
MP	
NO	
OM	
PK	
PW	
PS	
PA	

Code Value	Description
PG	
PY	
PE	
PH	
PN	
PL	
PT	
PR	
QA	
RE	
RO	
RU	
RW	
SH	
KN	
LC	
PM	
VC	
WS	
SM	
ST	
SA	

Code Value	Description
SN	
CS	
SC	
SL	
SG	
SK	
SI	
SB	
SO	
ZA	
GS	
ES	
LK	
SD	
SR	
SJ	
SZ	
SE	
СН	
SY	
TW	
TJ	

Code Value	Description
TZ	
TH	
TL	
TG	
TK	
ТО	
TT	
TN	
TR	
TM	
TC	
TV	
UG	
UA	
AE	
GB	
UM	
UY	
UZ	
VU	
VE	
VN	

Description	
	Description

County

These field(s) use this type: **County.**

Business party county location

Name	County
------	--------

Base XSD Type: string

CouponComment

These field(s) use this type: **CouponComment.**

Comments associated with the coupon (e.g., Please rotate tire to front left).

Name CouponComment

Base XSD Type: string

Currency

The ISO code identifying the type of currency in use.

Name	Currency
Base XSD Type: string	
Code Value	Description
USD	
ADP	
AED	
AFA	
ALL	
ANG	
AOK	
ARA	
ATS	
AUD	
AWG	
BBD	
BDT	
BEF	
BGL	
BHD	
BIF	
BMD	
BND	
ВОВ	

Code Value	Description
BRC	
BSD	
BTN	
BUK	
BWP	
BZD	
CAD	
CHF	
CLF	
CLP	
CNY	
COP	
CRC	
CSK	
CUP	
CVE	
СҮР	
DDM	
DEM	
DJF	
DKK	
DOP	

Code Value	Description
DZD	
ECS	
EGP	
ESP	
ETB	
EUR	
FIM	
FKP	
FRF	
GBP	
GHC	
GIP	
GMD	
GNF	
GRD	
GTQ	
GWP	
GYD	
HKD	
HNL	
HTG	
HUF	

Code Value	Description
IDR	
IEP	
ILS	
INR	
IQD	
IRR	
ISK	
ITL	
JMD	
JOD	
JPY	
KES	
KHR	
KMF	
KPW	
KRW	
KWD	
KYD	
LAK	
LBP	
LKR	
LRD	

Code Value	Description
LSL	Description
LUF	
LYD	
MAD	
MGF	
MNT	
MOP	
MRO	
MTL	
MUR	
MVR	
MWK	
MXN	
MYR	
MZM	
NGN	
NIC	
NLG	
NOK	
NPR	
NZD	
OMR	

Code Value	Description
PAB	
PEI	
PGK	
PHP	
PKR	
PLZ	
PTE	
PYG	
QAR	
ROL	
RWF	
SAR	
SBD	
SCR	
SDP	
SEK	
SGD	
SHP	
SLL	
SKK	
sos	
SRG	

Code Value	Description
STD	
SUR	
SVC	
SYP	
SZL	
тнв	
TND	
TOP	
TPE	
TRL	
TTD	
TWD	
TZS	
UGS	
UYP	
VEB	
VND	
VUV	
WST	
YDD	
YER	
YUD	

Code Value	Description	
ZAR		
ZRZ		
ZWD		
Other		

CustomerChangeInd

These field(s) use this type: **CustomerChangeInd, CustomerChangeInd.**

Indicates whether customer information has changed

Name	CustomerChangeInd
Base XSD Type: string	
Code Value	Description
0	
1	

DamageCode

These field(s) use this type: **<u>DamageCode.</u>**

Type of damage that occurred (Ex: scratched, dented, etc)

Name	DamageCode

Base XSD Type: string

DataCollectionStatus

These field(s) use this type: <u>DataCollectionStatus,DataCollectionStatus,DataCollectionStatus,DataCollectionStatus,DataCollectionStatus</u>.

Indicates status of data for the record it appears on

Name	DataCollectionStatus
Base XSD Type: string	
Code Value	Description
С	
I	

Date

Name Date

Base XSD Type: date

DateTime

These field(s) use this type: **CreationDateTime.**

Date and time conforms to ISO 8601format rules without offset EX:2003-11-05T13:15:30Z

Name DateTime

Base XSD Type: dateTime

DBAName

These field(s) use this type: **DBAName.**

Doing Business As name.

Name DBAName

Base XSD Type: string

DealerInstallationInd

These field(s) use this type: **DealerInstallationInd.**

Indicates whether or not the dealership installed the part

Name	DealerInstallationInd
Base XSD Type: string	
Code Value	Description
0	
1	

DealerName

These field(s) use this type: **DealerName.**

Dealer name

Name	DealerName

Base XSD Type: string

DeductibleType

These field(s) use this type: **<u>DeductibleType.</u>**

The type of customer deductible. Eg: Service Contract

Name Deductible Type

Base XSD Type: string

DeductibleWaiverInd

These field(s) use this type: **<u>DeductibleWaiverInd.</u>**

Indicates that the dealer waivered the deductible or changed the deductible from an amount greater than zero to zero.

Name	DeductibleWaiverInd
Base XSD Type: string	
Code Value	Description
0	
1	

DefectCode

These field(s) use this type: **<u>DefectCode</u>**, **<u>DefectCode</u>**.

Manufacturer assigned code that defines failed component that caused the claim

Name DefectC	ode
--------------	-----

Base XSD Type: string

DelayedInspectionCode

These field(s) use this type: **DelayedInspectionCode**.

Explains why a vehicle cannot be initially inspected once it arrives at a dealer (ie: dealer closed, no one around to sign for vehicle)

Name	DelayedInspectionCode
------	-----------------------

Base XSD Type: string

DeliveryDate

These field(s) use this type: **DeliveryDate.**

The date of original retail vehicle sale

Name DeliveryDate

Base XSD Type: date

Department

Department

Name Department

Base XSD Type: string

DepartmentType

These field(s) use this type: **DepartmentType**. **DepartmentType**.

Identifies the type of department

Name DepartmentType

Base XSD Type: string

DiagnosticCodes

These field(s) use this type: **DiagnosticCodes.**

One or more Manufacturer Diagnostics Codes taken during the Repair Process for this job

Name DiagnosticCodes

Base XSD Type: string

DiagnosticProcessCode

These field(s) use this type: **<u>DiagnosticProcessCode.</u>**

Specifies what diagnostic process was followed by technician

Name DiagnosticProcessCode

Base XSD Type: string

DiagnosticResultType

These field(s) use this type: **<u>DiagnosticResultType.</u>**

Identifies specific result that was obtained from the diagnostic process

Name DiagnosticResultType

Base XSD Type: string

DiagnosticResultValue

These field(s) use this type: **DiagnosticResultValue.**

Identifies the value of the diagnostic process

Name DiagnosticResultValue

Base XSD Type: string

DistrictCode

These field(s) use this type: **DistrictCode.**

Manufacturer Assigned District Code

Name DistrictCode

Base XSD Type: string

DocumentDateTime

These field(s) use this type: **<u>DocumentDateTime.</u>**

Is the date and time the document was last created. This is not the date and time that the BOD message instance was created.

Name DocumentDateTime

Base XSD Type: dateTime

DriverAction

These field(s) use this type: **<u>DriverAction</u>**, **<u>DriverAction</u>**.

Driver action (Ex: Drop-Off, Pick-Up, etc)

Name DriverAction

Base XSD Type: string

EngineDisplacement

These field(s) use this type: **EngineDisplacement.**

Displacement of engine (i.e., amount of volume in the cylinders)

Name	EngineDisplacement		
Base XSD Type: st	ring		
Code Value		Description	
ci		ci - Cubic Inches	
сс		cc - Cubic Centimeters	
liters		liters	
other			
N/A		Not Applicable	

EngineLightInd

These field(s) use this type: **EngineLightInd.**

Check engine light indicator

Name	EngineLightInd	
Base XSD Type: string		
Code Value	Description	
0		
1		

EngineNumber

These field(s) use this type: **EngineNumber.**

Serial number of the engine if vehicle not made for US sale

Name EngineNumber

Base XSD Type: string

ESCFranchiseInd

These field(s) use this type: **ESCFranchiseInd.**

Extended Service Competitive (ESC) flag indicates if dealer has franchise for Extended Service Program (ESP) repair for competitive make

Name	ESCFranchiseInd
Base XSD Type: string	
Code Value	Description
0	
1	

ExpirationDate

These field(s) use this type: **ExpirationDate**, **ExpirationDate**.

Expiration Date

Name Expiration Date

Base XSD Type: date

ExteriorColor

These field(s) use this type: **ExteriorColor.**

Vehicle Exterior Color(s)

Name ExteriorColor

Base XSD Type: string

ExternalReferenceNumber

These field(s) use this type: **ExternalReferenceNumber.**

Secondary identifying scheme that is meaningful to claimant

Name ExternalReferenceNumber

Base XSD Type: string

FailureCode

These field(s) use this type: **FailureCode.**

Manufacturer-assigned code to describe the reason that a fault or symptom occurred

Name FailureCode

Base XSD Type: string

FamilyName

These field(s) use this type: **FamilyName.**

Last Name of business party

Name

FamilyName

Base XSD Type: string

FirstDayRentalInd

These field(s) use this type: **FirstDayRentalInd.**

If first day rental for service is covered in contract

Name

FirstDayRentalInd

Base XSD Type: string

Code Value

Description

0

1

FleetAccount

These field(s) use this type: **FleetAccount.**

Manufacturer defined fleet account number

Name

FleetAccount

Base XSD Type: string

FleetPurchaseOrderNumber

These field(s) use this type: **FleetPurchaseOrderNumber.**

Fleet Purchase Order Number vehicle was purchased under

Name FleetPurchaseOrderNumber

Base XSD Type: string

FormattedName

These field(s) use this type: **FormattedName.**

Full Name of business party. Format for name should be "First Last" with no commas between first and last name

Name FormattedName

Base XSD Type: string

FreightClaimNumber

These field(s) use this type: **FreightClaimNumber.**

The claim number of the freight claim associated with the current warranty claim

Name FreightClaimNumber

Base XSD Type: string

Gender

These field(s) use this type: $\underline{Gender.}$

Gender of party - M = Male, F = Female

Name Gender

Base XSD Type: string

Code Value Description

M "M" = Modified

Code Value	Description
F	Female

GivenName

These field(s) use this type: **GivenName.**

First Name of business party

Name GivenName

Base XSD Type: string

GroupNumber

These field(s) use this type: **GroupNumber.**

Group Number

Name GroupNumber

Base XSD Type: string

HazmatInd

These field(s) use this type: **<u>HazmatInd.</u>**

Indicator that Hazmat Was Used

Name HazmatInd

Base XSD Type: string

Code Value Description

0

1

HomeWork

Home or Work

Name	HomeWork	
Base XSD Type: string		
Code Value		Description
Home		Home
Work		Work
Other		Other

IgnitionKeyNumber

These field(s) use this type: **IgnitionKeyNumber.**

Vehicle Ignition Key Number

Name	IgnitionKeyNumber
------	-------------------

Base XSD Type: string

Indicator

These field(s) use this type: **<u>DeliverPendingMailInd.</u>**

0 = No, 1 = Yes

Name	Indicator
Base XSD Type: string	
Code Value	Description
0	
1	

InsuranceCompanyName

These field(s) use this type: **InsuranceCompanyName.**

Insurance company name

Name InsuranceCompanyName

Base XSD Type: string

InteriorColor

These field(s) use this type: **InteriorColor.**

Vehicle Interior Color(s)

Name InteriorColor

Base XSD Type: string

IssuingState

These field(s) use this type: **IssuingState,IssuingState.**

Indicates that State where the license was issued.

Name IssuingState

Base XSD Type: string

JobDenialCode

These field(s) use this type: **JobDenialCode**.

Dealer / Manufacturer defined code identifying the reason the customer denied service on a repair order line

Name JobDenialCode

Base XSD Type: string

JobGoodwillInd

These field(s) use this type: **JobGoodwillInd.**

Indicates if Dealer Goodwill has been applied to this job (complete or partial)

Name	JobGoodwillInd		
Base XSD Type: string	Base XSD Type: string		
Code Value		Description	
0			
1			

JobNumber

These field(s) use this type: **JobNumber.**

DMS assigned job or line identification number

Name JobNumber

Base XSD Type: string

JobReferbackNumber

These field(s) use this type: **JobReferbackNumber**.

Refer-back to a job that has already appeared within the same "pay-group" presently being processed (Customer, Claims or Internal Pay)

Name JobReferbackNumber

Base XSD Type: string

JobStatus

These field(s) use this type: **JobStatus.**

Status of Job (Ex: Complete, Incomplete)

Name JobStatus

Base XSD Type: string

JobType

These field(s) use this type: **JobType.**

Type of service performed (special policy, warranty pay, etc)

Name JobType

Base XSD Type: string

LaborActionCode

These field(s) use this type: **LaborActionCode**.

Manufacturer-assigned code to describe type of labor performed

Name LaborActionCode

Base XSD Type: string

LaborOperationComment

These field(s) use this type: **LaborOperationComment.**

Free form comment regarding the labor operation.

Name LaborOperationComment

Base XSD Type: string

LaborOperationIdType

These field(s) use this type: **LaborOperationIdType.**

Labor operation category code

Name LaborOperationIdType

Base XSD Type: string

LaborOperationLocation

These field(s) use this type: **<u>LaborOperationLocation.</u>**

Code Indicating Position/Location on Vehicle where labor was performed

Name LaborOperationLocation

Base XSD Type: string

LaborOperationPolicyCode

These field(s) use this type: **LaborOperationPolicyCode**.

Dealer assigned Policy code for the labor operation

Name LaborOperationPolicyCode

Base XSD Type: string

Language

These field(s) use this type: Language, Language, Language.

Language conforms to ISO 639-2 rules. Note the format for this field is language-Country (see Country data type for the list of countries with definitions). AA "Afar", AB "Abkhazian", AF "Afrikaans", AM "Amharic", AR "Arabic", AS "Assamese", AY "Aymara", AZ "Azerbaijani", BA "Bashkir", BE "Byelorussian", BG "Bulgarian", BH "Bihari", BI "Bislama", BN "Bengali" "Bangla", BO "Tibetan", BR "Breton", CA "Catalan", CO "Corsican", CS "Czech", CY "Welsh", DA "Danish", DE "German", DZ "Bhutani", EL "Greek", EN "English" "American", ES "Spanish", ET "Estonian", EU "Basque", FA "Persian", FI "Finnish", FJ "Fiji", FO "Faeroese", FR "French", FY "Frisian", GA "Irish", GD "Gaelic" "Scots Gaelic", GL "Galician", GN "Guarani", GU "Gujarati", HA "Hausa", HI "Hindi", HR "Croatian", HU "Hungarian", HY "Armenian", IK "Inupiak", IN "Indonesian", IS "Icelandic", IT "Italian",

IW "Hebrew", JA "Japanese", JI "Yiddish", JW "Javanese", KA "Georgian", KK "Kazakh", KL "Greenlandic", KM "Cambodian", KN "Kannada", KO "Korean", KS "Kashmiri", KU "Kurdish", KY "Kirghiz", LA "Latin", LN "Lingala", LO "Laothian", LT "Lithuanian", LV "Latvian" "Lettish", MG "Malagasy". MI "Maori", MK "Macedonian", ML "Malayalam", MN "Mongolian", MO "Moldavian", MR "Marathi", MS "Malay", MT "Maltese", MY "Burmese", NA "Nauru", NE "Nepali", NL "Dutch", NO "Norwegian", OC "Occitan", OM "Oromo" "Afan", OR "Oriya", PA "Punjabi", PL "Polish", PS "Pashto" "Pushto", PT "Portuguese", QU "Quechua", RM "Rhaeto-Romance", RN "Kirundi", RO "Romanian", RU "Russian", RW "Kinyarwanda", SA "Sanskrit", SD "Sindhi", SG "Sangro", SH "Serbo-Croatian", SI "Singhalese", SK "Slovak", SL "Slovenian", SM "Samoan", SN "Shona", SO "Somali", SQ "Albanian", SR "Serbian", SS "Siswati", ST "Sesotho", SU "Sudanese", SV "Swedish", SW "Swahili", TA "Tamil", TE "Tegulu", TG "Tajik", TH "Thai", TI "Tigrinya", TK "Turkmen", TL "Tagalog", TN "Setswana", TO "Tonga", TR "Turkish", TS "Tsonga", TT "Tatar", TW "Twi", UK "Ukrainian", UR "Urdu", UZ "Uzbek", VI "Vietnamese", WO "Wolof", XH "Xhosa", YO "Yoruba", ZH "Chinese", ZU "Zulu"

Name	Language Canguage		
Base XSD Type: string	Base XSD Type: string		
Code Value	Description		
en-US			
en-CA			
aa-ET			
ab-GE			
af-ZA			
am- ET			
ar-SA			
as-IN			
ay-BO			
az-AZ			
ba-RU			
be-BY			
bg-BG			
bh-IN			

Code Value	Description
bi-VU	
bn-BD	
bo-BT	
br-FR	
ca-ES	
co-FR	
cs-CZ	
cy-GB	
da-DE	
de-DE	
dz-BT	
el-GR	
es-ES	
et-EE	
eu-ES	
fa-AF	
fi-FI	
fj-FJ	
fo-FO	
fr-CA	
fr-FR	
fy-NL	

Code Value	Description
ga-IE	
gd-GB	
gl-ES	
gn-PY	
gu-IN	
ha-NG	
hi-IN	
hr-HR	
hu-HU	
hy-AM	
ik-GL	
in-ID	
is-IS	
it-IT	
iw-IL	
ja-JP	
ji-IL	
jw-ID	
ka-GE	
kk-KZ	
kl-GL	
km-KH	

Code Value	Description
kn-IN	
ko-KP	
ko-KR	
ks-IN	
ku-IQ	
ky-CN	
la-VA	
ln-CD	
lo-LA	
lt-LT	
lv-LV	
mg-MG	
mi-NZ	
mk-MK	
ml-IN	
mn-MN	
mo-MO	
mr-IN	
ms-MY	
mt-MH	
my-MM	
na-NR	

Code Value	Description
ne-NP	
nl-NL	
no-NO	
oc-FR	
om- ET	
or-IN	
pa-IN	
pl-PL	
ps-PK	
pt-PT	
qu-PE	
rm-CH	
rn-BI	
ro-RO	
ru-RU	
rw-RW	
sa-IN	
sd-PK	
sg-CF	
sh-HR	
si-LK	
sk-SK	

Code Value	Description
sl-SI	Возоприон
sm-WS	
sn-ZW	
so-SO	
sq-AL	
sr-CS	
ss-ZA	
st-ZA	
su-SD	
sv-SE	
sw-TL	
ta-IN	
te-IN	
tg-TJ	
th-TH	
ti-ET	
tk-TM	
tl-PH	
tn-ZA	
то-ТО	
tr-TR	
ts-ZA	

Code Value	Description
	Description
tt-RU	
tw-GH	
uk-UA	
ur-PK	
uz-UZ	
vi-VN	
wo-SN	
xh-ZA	
yo-NG	
zh-CN	
zu-ZA	

LicenseNumber

These field(s) use this type: $\underline{\textbf{LicenseNumber.}}$

State License plate number of vehicle

Name LicenseNumber

Base XSD Type: string

ListNumber

These field(s) use this type: **ListNumber.**

Identifies the weekly statement where the condition will be listed as paid.

Name	ListNumber
------	------------

Base XSD Type: string

LoanerVehicleInd

These field(s) use this type: **LoanerVehicleInd.**

Ioaner vehicle indicator

Name	LoanerVehicleInd	
Base XSD Type: string		
Code Value	Description	
0		
1		

LocationDescription

Location Description

Name LocationDescription	
--------------------------	--

Base XSD Type: string

MainOperationCode

These field(s) use this type: MainOperationCode.

Identifies the primary laborline or "main operator" that caused the vehicle to be serviced in the first place

Name	MainOperationCode
------	-------------------

Base XSD Type: string

MajorDamageCode

These field(s) use this type: **MajorDamageCode.**

Identifies major damage Examples: Y=Yes, N=No, B=Old Damage

Name

MajorDamageCode

Base XSD Type: string

Make

These field(s) use this type: Make, Make.

Vehicle make code - Usually available in the VIN number (use NCIC code).

Name

Make

Base XSD Type: string

ManualReviewCode

These field(s) use this type: ManualReviewCode.

Code to signal requirement for manual review

Name

ManualReviewCode

Base XSD Type: string

Manufacturer

These field(s) use this type: **Manufacturer.**

Manufacturer Name

Name

Manufacturer

Base XSD Type: string

MarketCode

These field(s) use this type: MarketCode.

A market code which designates the market area.

Name

MarketCode

Base XSD Type: string

MarketingMailInd

These field(s) use this type: $\underline{MarketingMailInd,MarketingMailInd.}$

Indicates customers whom have requested no marketing mail

Name	MarketingMailInd	
Base XSD Type: string		
Code Value	Description	
0		
1		

MarkupType

These field(s) use this type: MarkupType.

Specifiies the markup applied by system or dealership input (e.g., S=System)

Name MarkupType

Base XSD Type: string

MasterShieldInd

These field(s) use this type: **MasterShieldInd.**

Indicates if vehicle is covered by the Master Shield Extended warranty

Name	MasterShieldInd
Base XSD Type: string	
Code Value	Description
0	
1	

MiddleName

These field(s) use this type: MiddleName.

Middle Initial of business party

Name	Midd	leName
------	------	--------

Base XSD Type: string

MileageMeasure

M = Miles, K = KIlometers

Name	MileageMeasure
Base XSD Type: string	
Code Value	Description
M	"M" = Modified
K	Kilometers

MiscellaneousNotes

These field(s) use this type: MiscellaneousNotes.

Free form miscellaneous comments

Name MiscellaneousNotes

Base XSD Type: string

Model

These field(s) use this type: $\underline{Model,Model.}$

Manufacturer-assigned model code of vehicle - Usually available in the VIN number (use NCIC code)

Name Model

Base XSD Type: string

ModelDescription

These field(s) use this type: **ModelDescription.**

Descriptive vehicle model name

Name ModelDescription

Base XSD Type: string

ModelYear

These field(s) use this type: **ModelYear.**

Vehicle designated model year

Name ModelYear

Base XSD Type: gYear

Name

These field(s) use this type: **GivenName,FamilyName,FormattedName.**

Name of the Party.

Name Name

Base XSD Type: string

Narrative

These field(s) use this type: **Narrative.**

Comment/Narrative can occur multiple times depending on Narrative type

Name Narrative

Base XSD Type: string

NarrativeType

These field(s) use this type: $\underline{\textbf{NarrativeType.}}$

Defines the Type of Narrative/Comment

Name NarrativeType

Base XSD Type: string

NoChargeLaborCode

These field(s) use this type: **NoChargeLaborCode**.

Indicates this labor operation is a no-charge (e.g, NC=Nop Charge; OL=Overlapping)

Name NoChargeLaborCode

Base XSD Type: string

NonUSVehicleInd

These field(s) use this type: **NonUSVehicleInd.**

Indicates whether the vehicle was produced for the United States or not

Name	NonUSVehicleInd
*Base XSD Type: string	
Code Value	Description
0	
1	

Note

A free form note.

Name Note

Base XSD Type: string

NotificationDate

These field(s) use this type: **NotificationDate.**

Notification date

Name NotificationDate

Base XSD Type: date

NotificationReason

These field(s) use this type: **NotificationReason.**

Notification Reason

Name

NotificationReason

Base XSD Type: string

OdometerStatus

These field(s) use this type: **OdometerStatus.**

Status of odometer at trade-in. Example:: Replaced, Tampered, Miles> 90,000, etc.

Name

OdometerStatus

Base XSD Type: string

OEMClaimNumber

These field(s) use this type: **OEMClaimNumber.**

Assigned by OEM at time of claim processing

Name

OEMClaimNumber

Base XSD Type: string

OEMVehicleInd

These field(s) use this type: **OEMVehicleInd.**

Indicates whether or not the part was installed on an OEM vehicle

Name	OEMVehicleInd
Paca VSD Typo: string	

Base XSD Type: string

Code Value Description

0

1

OptionName

These field(s) use this type: **OptionName.**

Name of vehicle option

Name

OptionName

Base XSD Type: string

OptionSecurityCode

These field(s) use this type: **OptionSecurityCode.**

Security code to unlock option. (i.e, radio code)

Name

OptionSecurityCode

Base XSD Type: string

OptionStockNumber

These field(s) use this type: **OptionStockNumber.**

Stock Number of Vehicle Option

Name

OptionStockNumber

Base XSD Type: string

OrderInternalNotes

These field(s) use this type: OrderInternalNotes.

Free form text for internal repair order remarks that will NOT be printed on the invoice

Name

OrderInternalNotes

Base XSD Type: string

OrderNotes

These field(s) use this type: **OrderNotes.**

Free form text for general repair order comment which will be printed on the invoice

Name OrderNotes

Base XSD Type: string

OriginalRepairOrderNumber

These field(s) use this type: **OriginalRepairOrderNumber.**

References Original Repair Order number

Name OriginalRepairOrderNumber

Base XSD Type: string

OriginalSerialNumber

These field(s) use this type: **OriginalSerialNumber.**

The serial number of the part that is being replaced

Name Original Serial Number

Base XSD Type: string

OriginCode

These field(s) use this type: **OriginCode.**

Indicates source of repair order- Examples: D - Dealer Entered; T -Teleservice; K - Key Reader

Name OriginCode

Base XSD Type: string

PackageCode

These field(s) use this type: **PackageCode.**

Package Code

Name PackageCode

Base XSD Type: string

PartAccessoryInd

These field(s) use this type: **PartAccessoryInd.**

Indicates whether this is an accessory

Name	PartAccessoryInd	
Base XSD Type: string		
Code Value	Description	
0		
1		

PartDealerName

These field(s) use this type: **PartDealerName.**

Name of the dealer/business that installed failed part

Name PartDealerName

Base XSD Type: string

PartSourceCode

These field(s) use this type: **PartSourceCode**.

Indicates the source of the part (e.g. M - Manufacturer)

Name

PartSourceCode

Base XSD Type: string

PartType

These field(s) use this type: **PartType,PartType.**

Specifies whether the parts are indicated by manufacturer part code or Part Number - H = Manufacturer Part Code, P = Part Number

Name	PartType	
Base XSD Type: string		
Code Value Description		Description
Н		Manufacturer Part Code
P		"P" = Pending

PCMFailureCode

These field(s) use this type: **PCMFailureCode.**

Powertrain Control Model failure code

Name

PCMFailureCode

Base XSD Type: string

PostalCode

These field(s) use this type: **PostalCode.**

Postal Code of the Address.

Name PostalCode

Base XSD Type: string

PreferredContactMethod

These field(s) use this type: **PreferredContactMethod.**

Preferred contact method

Name	PreferredContactMethod PreferredContactMethod
Base XSD Type: string	
Code Value	Description
Day Phone	Day Phone
Evening Phone	Evening Phone
Cell Phone	Cell Phone
Work Fax	Work Fax
Home Fax	Home Fax
Pager	Pager
Work Email	Work Email
Home Email	Home Email
US Mail	US Mail
Other	Other
N/A	Not Applicable

${\bf Preferred Contact Method Organization}$

These field(s) use this type: **PreferredContactMethod.**

Preferred Contact Method Organization

Name	PreferredContactMethodOrganization
Base XSD Type: string	
Code Value	Description
Day Phone	Day Phone
Cell Phone	Cell Phone
Work Fax	Work Fax
Pager	Pager
Work Email	Work Email
US Mail	US Mail
Other	Other

PreferredLanguage

These field(s) use this type: **PreferredLanguage.**

Preferred language

Name	PreferredLanguage
Base XSD Type: string	
Code Value	Description
en-US	
en-CA	
aa-ET	
ab-GE	
af-ZA	
am- ET	

Code Value	Description
ar-SA	
as-IN	
ay-BO	
az-AZ	
ba-RU	
be-BY	
bg-BG	
bh-IN	
bi-VU	
bn-BD	
bo-BT	
br-FR	
ca-ES	
co-FR	
cs-CZ	
cy-GB	
da-DE	
de-DE	
dz-BT	
el-GR	
es-ES	
et-EE	

Code Value	Description
eu-ES	
fa-AF	
fi-FI	
fj-FJ	
fo-FO	
fr-CA	
fr-FR	
fy-NL	
ga-IE	
gd-GB	
gl-ES	
gn-PY	
gu-IN	
ha-NG	
hi-IN	
hr-HR	
hu-HU	
hy-AM	
ik-GL	
in-ID	
is-IS	
it-IT	

Description
Description

Code Value	Description
ml-IN	
mn-MN	
mo-MO	
mr-IN	
ms-MY	
mt-MH	
my-MM	
na-NR	
ne-NP	
nl-NL	
no-NO	
oc-FR	
om- ET	
or-IN	
pa-IN	
pl-PL	
ps-PK	
pt-PT	
qu-PE	
rm-CH	
rn-BI	
ro-RO	

Code Value	Description
ru-RU	
rw-RW	
sa-IN	
sd-PK	
sg-CF	
sh-HR	
si-LK	
sk-SK	
sl-SI	
sm-WS	
sn-ZW	
so-SO	
sq-AL	
sr-CS	
ss-ZA	
st-ZA	
su-SD	
sv-SE	
sw-TL	
ta-IN	
te-IN	
tg-TJ	

ti-ET tk-TM ti-PH tn-ZA to-TO tr-TR ts-ZA tt-RU tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN	Code Value	Description
ti-ET tk-TM tl-PH tn-ZA to-TO tr-TR ts-ZA tt-RU tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN		Description
tk-TM tl-PH tn-ZA to-TO tr-TR ts-ZA tt-RU tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN		
ti-PH tn-ZA to-TO tr-TR ts-ZA tt-RU tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN	ti-ET	
tn-ZA to-TO tr-TR ts-ZA tt-RU tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN	tk-TM	
to-TO tr-TR ts-ZA tt-RU tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN	tl-PH	
tr-TR ts-ZA tt-RU tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN	tn-ZA	
ts-ZA tt-RU tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG	to-TO	
tt-RU tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG	tr-TR	
tw-GH uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN	ts-ZA	
uk-UA ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN	tt-RU	
ur-PK uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN	tw-GH	
uz-UZ vi-VN wo-SN xh-ZA yo-NG zh-CN	uk-UA	
vi-VN wo-SN xh-ZA yo-NG zh-CN	ur-PK	
wo-SN xh-ZA yo-NG zh-CN	uz-UZ	
xh-ZA yo-NG zh-CN	vi-VN	
yo-NG zh-CN	wo-SN	
zh-CN	xh-ZA	
	yo-NG	
	zh-CN	
zu-ZA	zu-ZA	

PriceExplanation

These field(s) use this type: **PriceExplanation.**

Explanatory Note for Pricing

Name PriceExplanation

Base XSD Type: string

PriceType

These field(s) use this type: **PriceType.**

Price Type

Name	PriceType		
Base XSD Type: string	Base XSD Type: string		
Code Value		Description	
Job			
Labor			
Parts			
Sublet			
Miscellaneous			
GasOilGrease			
PaintMaterials			
ShopSupplies			
Freight			
Claim			
SubletLabor			
SubletParts			
ReturnCore			

Code Value	Description
Customer	Initiative applies to Customer category, e.g. First Time Buyer, etc.
Internal	
RentLoaner	
Return	
Splits	
Total	
Other	Other

PrimaryContactInd

These field(s) use this type: **PrimaryContactInd.**

Indicates if contact is primary contact

Name	PrimaryContactInd	
*Base XSD Type: string	Base XSD Type: string	
Code Value	Description	
0		
1		

PrimaryDriverInd

These field(s) use this type: **PrimaryDriverInd,PrimaryDriverInd.**

Identifies customer as primary driver.

Name PrimaryDriverInd

Base XSD Type: string

Dado Neb Typor oning		
Code Value	Description	
0		
1		

PriorClaimNumber

These field(s) use this type: **PriorClaimNumber.**

Original claim number for a claim that being continued. In other words, a claim was entered and paid, but something was forgotten. The dealer can then continue the claim using a different claim number and this is the original claim number.

Name PriorClaimNumber

Base XSD Type: string

Priority

Indicates manufacturer handling and processing urgency

Name	Priority
------	----------

Base XSD Type: string

ProviderName

These field(s) use this type: **ProviderName**, **ProviderName**.

Provider Name

Name ProviderName

ReceiptNumber

These field(s) use this type: **ReceiptNumber,ReceiptNumber.**

Numeric identifier found on the carrier's receipt when a vehicle is delivered to the dealer

Name

ReceiptNumber

Base XSD Type: string

Reference

These field(s) use this type: **ReferenceId.**

Reference notation

Name

Reference

Base XSD Type: string

ReferenceNumber

Reference number

Name

ReferenceNumber

Base XSD Type: string

RegisteredMailReceiptNumber

These field(s) use this type: **RegisteredMailReceiptNumber.**

Registered Mail Receipt Number

Name

RegisteredMailReceiptNumber

RelationshipCode

These field(s) use this type: **RelationshipCode**, **RelationshipCode**.

Indicates the Business Party's relationship to the primary Party (e.g., mother, father, husband, etc.).

Name RelationshipCode

Base XSD Type: string

RentInDate

These field(s) use this type: **RentInDate.**

Date rental/loaner vehicle provided to customer

Name RentInDate

Base XSD Type: date

RentLoan

R= Rental or L=Loaner

Name	RentLoan
Base XSD Type: string	

Code Value Description

 $\frac{L}{R}$

RentLoanerCode

These field(s) use this type: **RentLoanerCode.**

Identifies rental/loaner vehicle

Name	RentLoanerCode	
Base XSD Type: string		
Code Value	Description	
L		
R		

RentLoanerInvoiceNumber

These field(s) use this type: **RentLoanerInvoiceNumber.**

Rental/loaner accounting identifier - the Rental Loaner Invoice # from either the DMS or rental company

Name RentLoanerInvoiceNumber

Base XSD Type: string

RentLoanerReasonCode

These field(s) use this type: **RentLoanerReasonCode.**

The reason code identifying the reason a rental loaner was provided

Name RentLoanerReasonCode

Base XSD Type: string

RentNotes

These field(s) use this type: **RentNotes.**

Rent Loaner Comments

Name RentNotes

RentOutDate

These field(s) use this type: **RentOutDate.**

Date rental/loaner vehicle provided to customer

Name

RentOutDate

Base XSD Type: date

RepairOrderCompletedDate

These field(s) use this type: **RepairOrderCompletedDate.**

The date the last line was closed on the repair order

Name

RepairOrderCompletedDate

Base XSD Type: date

RepairOrderInvoiceDate

These field(s) use this type: **RepairOrderInvoiceDate.**

The date the repair order transaction moves to accounting

Name

RepairOrderInvoiceDate

Base XSD Type: date

RepairOrderOpenedDate

These field(s) use this type: **RepairOrderOpenedDate.**

System date when Repair Order was opened

Name

RepairOrderOpenedDate

Base XSD Type: date

RepeatRepairInd

These field(s) use this type: **RepeatRepairInd.**

Identifies repair as having been performed previously on the vehicle

Name	RepeatRepairInd		
Base XSD Type: string			
Code Value		Description	
0			
1			

ReplacementSerialNumber

These field(s) use this type: **ReplacementSerialNumber.**

Replacement Serial Number

Name ReplacementSerialNumber

Base XSD Type: string

RestrictionInd

These field(s) use this type: **RestrictionInd.**

Indication that vehicle has restrictions on its use

Name	RestrictionInd	
Base XSD Type: string		
Code Value	Description	
0		
1		

RoadHazardInd

These field(s) use this type: **RoadHazardInd.**

Indicates whether Roadside hazard is covered in the contract

Name	RoadHazardInd
Base XSD Type: string	
Code Value	Description
0	
1	

RoadsideAssistanceInd

These field(s) use this type: **RoadsideAssistanceInd,RoadsideAssistanceInd.**

Indicates whether coverage includes roadside assistance

Name	RoadsideAssistanceInd
Base XSD Type: string	
Code Value	Description
0	
1	

SaleClass

These field(s) use this type: **SaleClass.**

Class of sale.

Name

Base XSD Type: string

Code Value	Description
New	Never owned.
Used	Previously Owned
Demo	Demonstration item.
Other	Other
N/A	Not Applicable
Floor Sample	This is a vehicle that is provided in the showroom as an example.
Factory	Identifies that the vehicle may have been used as a product demonstration for an official or executive from the manufacturer.

Salutation

These field(s) use this type: **Salutation.**

Title or greeting of business party

Name	Salutation
1441110	-a.a.a.i

Base XSD Type: string

SecondaryPassword

These field(s) use this type: **SecondaryPassword.**

Secondary password used to validate access to the dealer information

SecondaryPassword

SecondaryReferenceNumber

These field(s) use this type: **SecondaryReferenceNumber.**

Secondary Repair Order reference number

Name SecondaryReferenceNumber

Base XSD Type: string

SerialNumber

Serial Number

Name SerialNumber

Base XSD Type: string

ServiceAdvisorName

These field(s) use this type: **ServiceAdvisorName.**

Name of service advisor

Name ServiceAdvisorName

Base XSD Type: string

ServiceCode

These field(s) use this type: **ServiceCode.**

Manufacturer assigned code for service component

Name ServiceCode

ShortMfg

These field(s) use this type: **SenderNameCode, DestinationNameCode.**

Short Manfacturer or RSP Codes

Name ShortMfg

Base XSD Type: string

SortName

These field(s) use this type: **SortName.**

Index name used as a sort for report purposes

Name SortName

Base XSD Type: string

SparePartDate

These field(s) use this type: ${\bf \underline{SparePartDate.}}$

The date the part was purchased

Name SparePartDate

Base XSD Type: date

SparePartInvoiceNumber

These field(s) use this type: **SparePartInvoiceNumber.**

The invoice number on which the part was sold over the counter

Name SparePartInvoiceNumber

SplitsType

These field(s) use this type: **SplitsType.**

Splits Type

Name	SplitsType SplitsType	
Base XSD Type: string		
Code Value	Description	
Job		
Labor		
Parts		
Sublet		
Miscellaneous		
GasOilGrease		
PaintMaterials		
ShopSupplies		
Freight		
Total		
Other	Other	

StateOrProvince

These field(s) use this type: **StateOrProvince.**

Is the State or Province of a given Address.

Name	StateOrProvince
------	-----------------

StatusCode

These field(s) use this type: **StatusCode.**

A code identifying the reason for the status message.

Name	StatusCode	
Base XSD Type: string		
Code Value		Description
Success		The operation completed successfully. This does not necessarily mean that the BOD was processed. Instead it means that the client's role is done and that it won't receive any error messages later. Type of Response Code: Success.
Unspecified		An unspecified error occurred. The StatusText field contains the complete text.
Not In Inventory		Inventory is not currently available and back ordering was not requested.
Discontinued		The part has discontinued.
Invalid Part		Invalid part number.
Not Yet Available		The part is scheduled for a future release date and is not available at this time.
Not Authorized		The part is not authorized for your product line.
Under Development		The part is under development and not ready for sale.
Assembly Only		The part is a component part and is only available as an assembly.
Component Only		The part is an assembly part and is only available as a component.
Internal Use Only		The part is reserved for manufacturing and supplier internal use; it is not a service replacement part.
Recalled		The part has been recalled.
Cannot Sell		The part is not available for sale for an unspecified reason.
Export Only		The part is not available for sale in the United States; it is for export vehicles only.
Credit Limit Exceeded		Credit limit exceeded.

Credit card transaction denied by creditor. The dealer's account has been put on hold. The unit of measurement was invalid for this part number.
The unit of measurement was invalid for this part number.
The promotion gods is involid
The promotion code is invalid.
The shipping method is invalid, for example, shipping by ground to Puerto Rico.
The line number is the same as another line within this transaction.
Drop shipments are not allowed.
Will-call pickups are not allowed.
There is a minimum quantity purchase requirement for this part and the quantity has not been met. The minimum quantity is: NN
Other
Not Applicable

StatusText

These field(s) use this type: **StatusText.**

Descriptive status text.

Name StatusText

Base XSD Type: string

StatusType

These field(s) use this type: **StatusType.**

Defines the type of status that occurred. EX: S-Success, E-Error, I-Info, A-Abort

Name	StatusType	
Base XSD Type: str	ing	
Code Value		Description
Success		The operation completed successfully. This does not necessarily mean that the BOD was processed. Instead it means that the client's role is done and that it won't receive any error messages later. Type of Response Code: Success.
Error		The operation resulted in error and did not succeed.
Warning		The operation completed a warning.
Informational		The provided StatusText is informational.
Other		Other
N/A		Not Applicable

SubletCode

These field(s) use this type: **SubletCode.**

Type of sublet work

Name	SubletCode
Name	SubletCode

Base XSD Type: string

SubletInvoiceNumber

These field(s) use this type: **SubletInvoiceNumber.**

Third party invoice number for work

Name SubletInvoiceNumber

Suffix

These field(s) use this type: **Suffix.**

Business Party name suffix designation if individual Ex: Sr, Jr, III, etc.

Name

Suffix

Base XSD Type: string

SupplementalCampaignInd

These field(s) use this type: **SupplementalCampaignInd.**

Denotes whether claim is actual campaign service or additional service, but still related to the campaign

Name	SupplementalCampaignInd
*Base XSD Type: string	
Code Value	Description
0	
1	

SymptomCode

These field(s) use this type: **SymptomCode.**

Manufacturer-assigned code to describe how customer experiences problem

Name SymptomCode

Base XSD Type: string

SystemVersion

These field(s) use this type: **SystemVersion.**

The sender's software version number.

emVersion
•

Base XSD Type: string

TaxabilityInd

These field(s) use this type: **TaxabilityInd.**

Determines whether an item or amount is taxable.

Name	TaxabilityInd
Base XSD Type: string	
Code Value	Description
0	
1	

TaxType

These field(s) use this type: **TaxType.**

Tax Type

	TaxType
Base XSD Type: string	
Code Value	Description
Total	
Amount	
Labor	
Parts	

Code Value	Description
Claim	
Dealer	Dealer
Deductible	
Prorated	
Other	Other
Luxury	
Vehicle Inventory	
Taxes Not In Cash Price	
Document Stamp	
Sales	
Tire	
Personal Property	
Registration	
Monthly/Use	
Weight	
Adjustment	
DownPayment	
CapCostReduction	
Lieu	
CurrentYear	
N/A	Not Applicable
LocalOption	Tennessee Tax - combination of city and county.

Code Value	Description
SingleArticle	Tennessee Tax - State Tax
Gas	Gas tax levied to applicable vehicles or by state/province law. (Referred to in US as "Gas Guzzler" tax).
Total Monthly/Use	The total amount of monthly use tax for a payment on a contract.
Service Contract	Tax charged on service contracts (where applicable).
Adjusted Sales	Adjusted sales tax due to tax modifications when capitalized (i.e. NY)
Total Sales/Use	The total amount of sales/use tax for a single payment contract.
Air Conditioning Excise	Provincal tax providing for the installation or removal of freon. (Canada)
Purchase and Use	A type of tax that is assessed upon "tax free" tangible personal property purchased by a resident of the assessing state for use, storage or consumption of goods in that state (not for resale), regardless of where the purchase took place. The tax is a one time retail tax due at registration or titling of a vehicle.
County Tax	A county tax charged based on the location of the dealer and the customer. An example, The Cook County Tax.
General Excise	This is a general excise tax that a state or region could impose.
Gross Receipt	A gross receipts tax, sometimes referred to as a gross excise tax, is a tax on the total gross revenues of a company, regardless of their source.
Tax on Trade-In	Tax due on a trade-in vehicle.
Tax on Upfront Fees	Total tax due on fees paid upfront.
Tax on Acquisition Fee	Tax due on amount of acquisition fee.
Environmental Tax	Environmental Levy / Tax.
Motor Vehicle Tax	Tax paid at of registration based on the vehicle's age and MSRP.
Wheel Tax	A tax levied by cities and villages to be credited to a road fund of the city or village

TaxTypeld

These field(s) use this type: **TaxTypeId.**

CS - City, CP - County, ST - State, OT - Other, EX - Excise, VAT - Value Added Tax, PST - Provincial Sales Tax, RT - Rental, GST - Goods and Services Tax, HST - Harmonized Tax, ART - Air Tax, QST - Quebec Sales Tax, IMP - Import Tax

Name	TaxTypeld		
Base XSD Type: st	Base XSD Type: string		
Code Value		Description	
CS		City	
СР		County	
ST		State	
OT		"OT" = Other	
EX		Excise	
VAT		Value Added	
PST		Provincial Sales Tax	
RT		Rental	
GST		Goods and Services Tax	
HST		Harmonized Tax	
ART		Air Tax	
QST		Quebec Sales Tax	
IMP		Import Tax	

TeamName

These field(s) use this type: **TeamName.**

Name of team

Name

TeamName

Base XSD Type: string

TechnicianName

These field(s) use this type: **TechnicianName.**

Name of technician

Name

TechnicianName

Base XSD Type: string

TechnicianNotes

These field(s) use this type: **TechnicianNotes.**

Free form technician comments

Name

TechnicianNotes

Base XSD Type: string

TechnicianSkillArea

These field(s) use this type: **TechnicianSkillArea**.

Type of training required to perform the labor operation

Name

TechnicianSkillArea

Base XSD Type: string

TechnicianSkillLevel

These field(s) use this type: **TechnicianSkillLevel.**

Level of training required to perform the labor operation

Name	TechnicianSkillLevel
------	----------------------

Base XSD Type: string

TelematicsServiceInd

These field(s) use this type: **TelematicsServiceInd.**

Indication whether Telematics Service Subscription is turned on

Name	TelematicsServiceInd
*Base XSD Type: string	
Code Value	Description
0	
1	

TermLength

Term Length

Name	TermLength	
Base XSD Type: string		
Code Value		Description
Months		Months
Weeks		Weeks
Years		Years

Text

These field(s) use this type:

 $\underline{CreatorNameCode,StoreNumber,AreaNumber,Password,DestinationSoftwareCode,DestinationSoftware,StoreNumber,AreaNumber,LogicalId,Component,Tassword,DestinationSoftwareCode,De$

Indicates generic text type

Name Text

Base XSD Type: string

TowedInInd

These field(s) use this type: **TowedInInd.**

Indicates that this job led to the need to have this car towed in

Name	TowedInInd
Base XSD Type: string	
Code Value	Description
0	
1	

TransmissionCode

These field(s) use this type: **TransmissionCode.**

Transmission Serial Number

Name TransmissionCode

Base XSD Type: string

TransmissionType

These field(s) use this type: **TransmissionType.**

Vehicle Transmission type - 3 = 3 speed, 4 = 4 speed, 5 = 5 speed, 6 = 6 speed, A - Automatic

Name	TransmissionType
Base XSD Type: string	
Code Value	Description
3	3 Speed
4	4 Speed
5	5 Speed
6	6 Speed
A	"A" = Automatic
Automatic 3	Automatic 3 speed transmission type
Automatic 4	Automatic 4 speed transmission type
Automatic 5	Automatic 5 speed transmission type
Automatic 6	Automatic 6 speed transmission type
Automatic 7	Automatic 7 speed transmission type
7	7 Speed
CVT Automatic 3	Continuously Variable T ransmission Automatic 3 speed transmission type (natural gas and hybrid).
CVT Automatic 4	Continuously Variable T ransmission Automatic 4 speed transmission type (natural gas and hybrid).
CVT Automatic 5	Continuously Variable T ransmission Automatic 5 speed transmission type (natural gas and hybrid).
CVT Automatic 6	Continuously Variable T ransmission Automatic 6 speed transmission type (natural gas and hybrid).

Code Value	Description
CVT Automatic 7	Continuously Variable T ransmission Automatic 7 speed transmission type (natural gas and hybrid).
M	M = Manual

TransportationCarrier

These field(s) use this type: **TransportationCarrier.**

Name of transportation carrier

Name TransportationCarrier

Base XSD Type: string

TreadActInd

 $These\ field(s)\ use\ this\ type:\ \underline{\textbf{TreadActInd,TreadActInd,TreadActInd.}}$

Transportation Recall Enhancement, Accountability, and Documentation (TREAD) Act (i.e., - Indicates if there has been fire damage)

Name	TreadActInd
Base XSD Type: string	
Code Value	Description
0	
1	

TrimCode

These field(s) use this type: **TrimCode.**

Manufacturer assigned trim code

Name	TrimCode
------	----------

Base XSD Type: string

Type

Type

Name Type

Base XSD Type: string

UOM

Units of Measure - ea=Each; bx=Box; case=Case; ctn=Carton; gal=Gallon; qt=Quart; pt=Pint; ft=Feet; yd=Yard; in=Inch; L=Liter; m=Meter; cm=Centimeter; kg=Kilograms; g=grams; other=Other

Name	UOM
Base XSD Type: string	
Code Value	Description
ea	Each
bx	Box
case	Case
ctn	Carton
gal	Gallon
qt	Quart
pt	Pint
ft	ft = feet
yd	yd = yard
in	in = inch

Code Value	Description
L	"L" = Canceled
m	m = meter
cm	cm = centimeter
kg	Kilogram
g	Gram
other	
tn	Ton
km	kilometers
mi	miles
hp	horsepower
kw	kilowatt

UrbanizationCode

These field(s) use this type: <u>UrbanizationCode</u>, <u>UrbanizationCode</u>.

Geographic definition of a metropolitan or suburban area

Name UrbanizationCode

Base XSD Type: string

URI

These field(s) use this type: **SenderURI, Destination URI, URI.**

URI

Name URI

Base XSD Type: anyURI

VehicleArrivalDate

These field(s) use this type: **VehicleArrivalDate,VehicleArrivalDate.**

The Date the original retail vehicle is delivered to a dealer

Name VehicleArrivalDate

Base XSD Type: date

VehicleDemoInd

These field(s) use this type: <u>VehicleDemoInd</u>.

Indicates whether vehicle was ever a demo

Name VehicleDemoInd

Base XSD Type: string

Code Value Description

0

1

VehicleNote

These field(s) use this type: **VehicleNote.**

Any vehicle related notes

Name VehicleNote

Base XSD Type: string

VehicleStock

These field(s) use this type: **VehicleStock.**

Dealer assigned vehicle stock number

Name VehicleStock

Base XSD Type: string

VIN

These field(s) use this type: **VIN,VIN.**

Federally defined 17 position vehicle identification number

Name VIN

Base XSD Type: string

WarrantyAppealInd

These field(s) use this type: WarrantyAppealInd.

Warranty Appeal indicator

Name WarrantyAppealInd

Base XSD Type: string

Code Value Description

0

1

WarrantyExpirationDate

These field(s) use this type: WarrantyExpirationDate.

Last Date of vehicle warranty coverage for warranty currently in force at time of repair

Name WarrantyExpirationDate

Base XSD Type: date

WarrantyNotes

These field(s) use this type: WarrantyNotes.

Any Warranty related Notes

Name WarrantyNotes

Base XSD Type: string

WarrantyProgramCode

These field(s) use this type: <u>WarrantyProgramCode</u>.

Code for manufacturer Warranty special programs

Name WarrantyProgramCode

Base XSD Type: string

WarrantyRemaining

These field(s) use this type: WarrantyRemaining.

Defines how much warranty is left, either in time or miles

Name WarrantyRemaining

Base XSD Type: string

WarrantyStartDate

These field(s) use this type: WarrantyStartDate.

Start Date of vehicle warranty

Name WarrantyStartDate

Base XSD Type: date

WarrantyStatus

These field(s) use this type: WarrantyStatus.

Whether warranty is still applicable

Name WarrantyStatus

Base XSD Type: string

WarrantyTransferInd

These field(s) use this type: WarrantyTransferInd.

Indicates if warranty is transferable

Base XSD Type: string

Code Value Description

0

1

Year

Year

Name

Base XSD Type: gYear

ZoneCode

These field(s) use this type: **ZoneCode.**

Manufacturer Assigned Zone Code

Name ZoneCode

Base XSD Type: string

Fields and Global Attributes

Global declarations are items such as elements, attribute groups, and group definitions. These items are not defined within any particular component. A component may reference these definitions. Within a STAR XML Schemas these are typically known as global fields.

ApplicationArea

These field(s) use this type: **ApplicationArea**.

Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.

Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.

Name	ApplicationArea
Туре	ApplicationArea
Nillable	no
Abstract	no

XML Instance Representation

Change

These field(s) use this type: **Change.**

The Change verb is used when the sender of the BOD is not the owner of the data, but is sending a request for the document to be changed. An example of this is Change REQUISITN, where the original document needs to be changed based on a specific business event.

Name	Change
Туре	Change
Nillable	no
Abstract	no

XML Instance Representation

```
<Change
confirm="ConfirmType [0..1]"/>
```

ChangeRepairOrder

These field(s) use this type: **ChangeRepairOrder.**

Name	ChangeRepairOrder
Туре	ChangeRepairOrder
Nillable	no
Abstract	no

Header

Name	Header
Туре	RepairOrderHeader
Nillable	no
Abstract	no

```
<Header>
 <DocumentDateTime> DocumentDateTime </DocumentDateTime> [0..1]
 <SecondaryPassword> SecondaryPassword </SecondaryPassword> [0..1]
 <SecondaryDealerNumber> SecondaryDealerNumber </secondaryDealerNumber> [0..1]
 <DocumentId> DocumentId [1]
 <SecondaryReferenceNumber> SecondaryReferenceNumber /SecondaryReferenceNumber> [0..1]
 <Dealer> ROServiceDealerParty /Dealer> [0..1]
 <IndividualOwner> IndividualOwnerPartyExtendedRO </IndividualOwner> [0..1]
 <OrganizationalOwner> OrganizationalOwnerPartyExtendedRO 
 <IndividualCo-Owner> IndividualOwnerPartyExtendedRO </IndividualCo-Owner> [0..1]
 <OrganizationalCo-Owner> OrganizationalOwnerPartyExtendedRO </OrganizationalCo-Owner> [0..1]
 <PrimaryDriver> IndividualOwnerPartyExtendedRO </primaryDriver> [0..1]
 <SecondaryDriver> IndividualOwnerPartyExtendedRO </SecondaryDriver> [0..*]
 < Vehicle > Service Vehicle < / Vehicle > [0..1]
 <Warranty> WarrantyAdditional </Warranty> [0..*]
 <ServiceContract> FullServiceContract /ServiceContract> [0..*]
 <CASE> CASE </CASE> [0..*]
 <RepairOrderOpenedDate> RepairOrderOpenedDate /RepairOrderOpenedDate> [0..1]
 <RepairOrderCompletedDate> RepairOrderCompletedDate 
 <RepairOrderInvoiceDate> RepairOrderInvoiceDate 
 <ServiceAdvisor> ServiceAdvisor </ ServiceAdvisor> [0..1]
 <MileageIn> MileageIn </MileageIn> [0..1]
 <MileageOut> MileageOut </MileageOut> [0..1]
 <OrderNotes> OrderNotes> [0..1]
 <OrderInternalNotes> OrderInternalNotes> [0..1]
 <DepartmentType> DepartmentType /DepartmentType> [0..1]
```

```
<RentLoaner> RentLoaner </RentLoaner> [0..*]

<ServiceComponents> ServiceComponents </ServiceComponents> [0..*]

<Sublet> Sublet </Sublet> [0..*]

<LaborRate> LaborRate </LaborRate> [0..1]

<Price> Price </Price> [0..3]

<Tax> Tax </Tax> [0..*]

<DataCollectionStatus> DataCollectionStatus </DataCollectionStatus> [0..1]

<ESCFranchiseInd> ESCFranchiseInd </ESCFranchiseInd> [0..1]

<Splits> Splits </Splits> [0..1]

<TreadActInd> TreadActInd </TreadActInd> [0..1]

<LocationId> LocationId </LocationId> [0..1]

<RepairOrderStatus> ServiceContractStatus </RepairOrderStatus> [0..*]

</Header>
```

InternalPay

These field(s) use this type: **InternalPay.**

Name	InternalPay
Туре	InternalPay
Nillable	no
Abstract	no

```
<Job> Job </Job> [0..*]
<JobReferback> JobReferback </JobReferback> [0..*]
</InternalPay>
```

Job

These field(s) use this type: **Job, Job, Job**.

Name	Job
Туре	Job
Nillable	no
Abstract	no

```
<Job>
 <JobNumber> JobNumber </JobNumber> [1]
 < OperationId > OperationId < / OperationId > [1]
 <OperationName> OperationName </OperationName> [1]
 <CodesAndComments> CodesAndCommentsExpanded </CodesAndComments> [1]
 < Diagnostics > Diagnostics < / Diagnostics > [1..*]
 <ServiceParts> ServiceParts </ServiceParts> [0..*]
 <ServiceLabor> ServiceLabor </serviceLabor> [0..*]
 <CASE> CASE </CASE> [0..*]
 < Warranty Claim > Warranty Claim > [0..*]
 < HazmatInd > HazmatInd < / HazmatInd > [0..1]
 <Language> Language </Language> [0..1]
 <AddOnRepairInd> AddOnRepairInd </AddOnRepairInd> [0..1]
 <JobLaborRate> JobLaborRate /JobLaborRate> [0..1]
 <Price> Price </Price> [0..*]
 <LaborAllowanceHours> LaborAllowanceHours </LaborAllowanceHours> [0..1]
 <LaborActualHours> LaborActualHours </LaborActualHours> [1]
 <JobGoodwillInd> JobGoodwillInd </JobGoodwillInd> [0..1]
 <RepeatRepairInd> RepeatRepairInd </RepeatRepairInd> [0..1]
 <JobStatus> JobStatus </JobStatus> [0..1]
```

```
<JobType> JobType </JobType> [0..1]
 <ListNumber> ListNumber </ListNumber> [0..1]
 <OriginCode> OriginCode </OriginCode> [0..1]
 <RentLoaner> RentLoaner </RentLoaner> [0..*]
 <ServiceCampaign> ServiceCampaign </ServiceCampaign> [0..*]
 <Coupon> Coupon </Coupon> [0..*]
 <Technician> ServiceTechnician </Technician> [1..*]
 <ServiceComponents> ServiceComponents </ServiceComponents> [0..*]
 <Splits> Splits </Splits> [0..*]
 <Transportation> Transportation </Transportation> [0..*]
 < Tax > Tax < / Tax > [0..*]
 <TowedInInd> TowedInInd </TowedInInd> [0..1]
 <PackageCode> PackageCode </PackageCode> [0..1]
 <TreadActInd> TreadActInd </TreadActInd> [0..1]
 <Goodwill> Goodwill </Goodwill> [0..1]
</Job>
```

JobReferback

These field(s) use this type: **JobReferback.JobReferback.JobReferback.**

Name	JobReferback
Туре	JobReferback
Nillable	no
Abstract	no

XML Instance Representation

```
<JobReferback>
<JobReferbackNumber> JobReferbackNumber </JobReferbackNumber> [0..1]
</JobReferback>
```

RepairOrder

These field(s) use this type: **RepairOrder.**

Nam	е	RepairOrder
Туре	•	RepairOrder
Nilla	ble	no
Abst	ract	no

XML Instance Representation

```
<RepairOrder>
    <Header> ... </Header> [1]
    <Job> ... </Job> [0..*]
    <JobReferback> ... </JobReferback> [0..*]
    <WarrantyClaim> ... </WarrantyClaim> [0..*]
    <InternalPay> ... </InternalPay> [0..*]
    </RepairOrder>
```

Verb

These field(s) use this type: **Verb.**

Name	Verb
Туре	Verb
Nillable	no
Abstract	yes

XML Instance Representation

<Verb/>

WarrantyClaim

These field(s) use this type: WarrantyClaim, WarrantyClaim.

Name	WarrantyClaim
------	---------------

Туре	WarrantyClaim
Nillable	no
Abstract	no

```
<WarrantvClaim>
 <ClaimNumber> ClaimNumber </ClaimNumber> [0..1]
 <ClaimType> ClaimType </ClaimType> [0..1]
 <OEMClaimNumber> OEMClaimNumber </OEMClaimNumber> [0..1]
 <ExternalReferenceNumber> ExternalReferenceNumber </ExternalReferenceNumber> [0..1]
 <FreightClaimNumber> FreightClaimNumber /FreightClaimNumber> [0..1]
 <AccessoryClaimType> AccessoryClaimType </AccessoryClaimType> [0..1]
 <DefectCode> DefectCode </DefectCode> [0..1]
 <ItemId> ItemId </ItemId> [0..1]
 <PartType> PartType </PartType> [0..1]
 <SparePartDate> SparePartDate /SparePartDate> [0..1]
 <SparePartInvoiceNumber> SparePartInvoiceNumber 
 <SparePartMileage> SparePartMileage </SparePartMileage> [0..1]
 <WarrantyAppealInd> WarrantyAppealInd </WarrantyAppealInd> [0..1]
 <ServiceCampaign> ServiceCampaignExtended /ServiceCampaign> [0..*]
 <CodesAndComments> CodesAndComments </CodesAndComments> [0..1]
 <PartDealerNumer> PartDealerNumer </PartDealerNumer> [0..1]
 <PartDealerName> PartDealerName </PartDealerName> [0..1]
 <DealerInstallationInd> DealerInstallationInd /DealerInstallationInd> [0..1]
 <BatteryProration> BatteryProration </BatteryProration> [0..1]
 <OEMVehicleInd> OEMVehicleInd </OEMVehicleInd> [0..1]
 <WarrantyProgramCode> WarrantyProgramCode </WarrantyProgramCode> [0..1]
 <ClaimCategory> ClaimCategory </ClaimCategory> [0..1]
 <AuthorizationNumber> AuthorizationNumber </AuthorizationNumber> [0..1]
 < Authorization Code > Authorization Code < / Authorization Code > [0..1]
 <AuthorizationPayMaximum> AuthorizationPayMaximum </AuthorizationPayMaximum> [0..1]
 <a href="https://duthorizationPayPercent"></a> AuthorizationPayPercent</a> [0..1]
 <a href="AuthorizationPayType"></authorizationPayType</a> [0..1]
 <Price> Price </Price> [0..*]
 <Tax> Tax</Tax> [0..*]
```

```
<AppealReasonCode> AppealReasonCode </AppealReasonCode> [0..1]
 <ManualReviewCode> ManualReviewCode </ManualReviewCode> [0..1]
 <SubDealerNumber> SubDealerNumber SubDealerNumber> [0..1]
 <DataCollectionStatus> DataCollectionStatus </DataCollectionStatus> [0..1]
 <ClaimSubmissionCount> ClaimSubmissionCount </ClaimSubmissionCount> [0..1]
 <OriginalRepairOrderNumber> OriginalRepairOrderNumber </OriginalRepairOrderNumber> [0..1]
 <Splits> Splits </Splits> [0..1]
 <RentLoaner> RentLoaner </RentLoaner> [0..*]
 <ServiceComponents> ServiceComponents </ ServiceComponents> [0..*]
 <Transportation> Transportation </Transportation> [0..*]
 <Sublet> Sublet </Sublet> [0..*]
 <Job> Job </Job> [0..*]
 <JobReferback> JobReferback </JobReferback> [0..*]
 <WarrantyClaimDeductible> WarrantyClaimDeductible </WarrantyClaimDeductible> [0..*]
 <PriorClaimNumber> PriorClaimNumber </PriorClaimNumber> [0..1]
 <ClaimContinuationCode> ClaimContinuationCode ClaimContinuationCode> [0..1]
 <TreadActInd> TreadActInd </TreadActInd> [0..1]
 <LaborOperationId> LaborOperationId </LaborOperationId> [0..1]
</WarrantyClaim>
```