



Standards for Technology in Automotive Retail

**Implementation Guidelines
Get Service Processing Advisory DRAFT
Repository Version Rev4.4.4**

Table of Contents

Overview	1
Schema Field Usage	1
Business Scenario	2
Relationship Diagram	3
Schema Document Properties	4
Components and Data Types	5
AdjustedAmount	5
AdjustmentReason	5
Amount	6
ApplicationArea	6
ApprovedAmount	8
BusinessObjectDocument	8
ClaimCount	10
ConfirmableVerb	10
Count	11
DealerContributionAmount	11
DeductibleAmount	12
Description	12
Destination	12
DispositionReason	14
DispositionReasonCodeDesc	15
DocumentId	15
ExpressionCriteria	15
Get	16
GetServiceProcessingAdvisory	17
GetServiceProcessingAdvisoryDataArea	18
HeaderBase	20
Id	20
JobCount	21
JobReconciliation	21
LaborAmount	23
LocationId	23

NonTaxableAmount	23
OperationId	24
OtherAmount	24
PaidAmount	25
PartsAmount	25
PartyId	25
PaymentCycleId	26
Payments	26
Percent	27
ProratedAmount	28
RepairOrderReconciliation	28
RequestVerb	29
SecondaryDealerNumber	30
Sender	30
SenderBase	33
ServiceId	35
ServiceProcessingAdvisory	35
ServiceProcessingAdvisoryHeader	36
Signature	37
Tax	38
TaxAmount	39
TaxDescription	40
TaxRate	40
ToBePaidAmount	40
TotalAmount	41
TotalTaxableAmount	41
UnitSalesTaxAmount	42
Verb	42
WarrantyClaimBase	42
WarrantyClaimDeductible	43
WarrantyClaimReconciliation	44

<u>AdjustedInd</u>	45
<u>AdjustedReason</u>	46
<u>ClaimGasInd</u>	46
<u>ClaimInvoiceNumber</u>	47
<u>ClaimNumber</u>	47
<u>ClaimType</u>	47
<u>Code</u>	47
<u>ConfirmType</u>	48
<u>Country</u>	48
<u>Currency</u>	60
<u>Date</u>	67
<u>DateTime</u>	68
<u>DeductibleType</u>	68
<u>DeductibleWaiverInd</u>	68
<u>DispositionNotes</u>	69
<u>DispositionReasonCode</u>	69
<u>DispositionStatus</u>	69
<u>DocumentDateTime</u>	69
<u>Expression</u>	70
<u>ExpressionLanguage</u>	70
<u>ExternalReferenceNumber</u>	70
<u>Indicator</u>	70
<u>JobNumber</u>	71
<u>Language</u>	71
<u>Note</u>	78
<u>OEMClaimNumber</u>	78
<u>PaymentCycleEndDate</u>	78
<u>PaymentNotes</u>	78
<u>ProcessDate</u>	79
<u>Reference</u>	79
<u>ReferenceNumber</u>	79
<u>RepairOrderCompletedDate</u>	79

RepairOrderOpenedDate	80
SecondaryPassword	80
SettlementDate	80
SettlementType	81
ShortMfg	81
SystemVersion	81
TaxabilityInd	82
TaxType	82
TaxTypeId	84
Text	85
Type	86
URI	86
VIN	86
WarrantyNotes	86
Fields and Global Attributes	87
ApplicationArea	87
Get	87
GetServiceProcessingAdvisory	88
Header	89
ServiceProcessingAdvisory	90
Verb	90

Get Service Processing Advisory

Get Service Processing Advisory Guidelines

Overview

This document is a guideline on how to use the Get Service Processing Advisory Business Object Document (BOD). Get Service Processing Advisory has been defined in the context of STAR for the Automotive Retail Industry. The scope of this BOD is to define the Get Service Processing Advisory process for individual consumers who service their automobiles through their OEM's authorized Dealers. The focus is on Dealer and OEM interactions, not third party organizations. NOTE: Although this is the traditional use of the Get Service Processing Advisory, this BOD could be used to send Get Service Processing Advisory information between any two business parties.

Implementation Guidelines provide detailed information regarding the structure and meaning of the Get Service Processing Advisory BOD and corresponds directly to the Get Service Processing Advisory schema. In addition to structure and meaning, the Implementation Guidelines identify various business rules for specific fields/components that due to their nature, i.e. field interdependence, are not possible to express using schema. Please note that although these business rules are not included in the schema, they **MUST** be followed to be STAR Compliant. Therefore, the Get Service Processing Advisory Implementation Guidelines must be used in concert with the Get Service Processing Advisory schema during development and should **NOT** be considered a supplement or substitution to the schema. For more information regarding STAR XML Data Compliance, please review the STAR Data Compliance Guidelines document located on the STAR Web site.

For a copy of the corresponding Get Service Processing Advisory schema, please download the appropriate STAR schema repository from the XML portion of the STAR website (www.starstandard.org). Prior to downloading the schema, users are encouraged to download the STAR XML Reference/Implementation document also located on the XML portion of the STAR website. This document provides an overview of the STAR BOD development methodology, how to download and read STAR schema, and various frequently asked questions related to the implementation of STAR BODs.

STAR has followed the Open Application Group's Business Object Document methodology to develop the Get Service Processing Advisory BOD. Where possible, STAR has mapped to existing OAGI fields and components. Note however that the STAR Get Service Processing Advisory BOD is unique to the Retail Automotive industry and is not an extension of any existing OAGIS BODs.

For more information on the Open Applications Group's BODs and related documentation please refer to the Open Applications Group's Web site at (www.openapplications.org).

Schema Field Usage

STAR uses the same Noun in the schema for all the Noun/Verb combinations of the Get Service Processing Advisory except the Get verb. Please refer to each Noun/Verb combination within this document to understand the requirements for each specific BOD. Although the Noun will always have every field defined for the Noun in the schema, each Noun/Verb combination may not use all of the fields. If a field is not used by a BOD, it will be noted in the business rules.


Get Service Processing Advisory

Business Scenario

The Service Processing Advisory Binary Collaboration starts with the sending of Service Processing Advisory information from the OEM to the Dealer. This process occurs on demand as needed. Note: This scenario is an example of how the Service Processing Advisory BOD can be used. Implementations may vary.

Relationship Diagram

The following is a representation of the Noun for this BOD. It is a high level overview provided to give an idea of the hierarchy of the Noun's components.

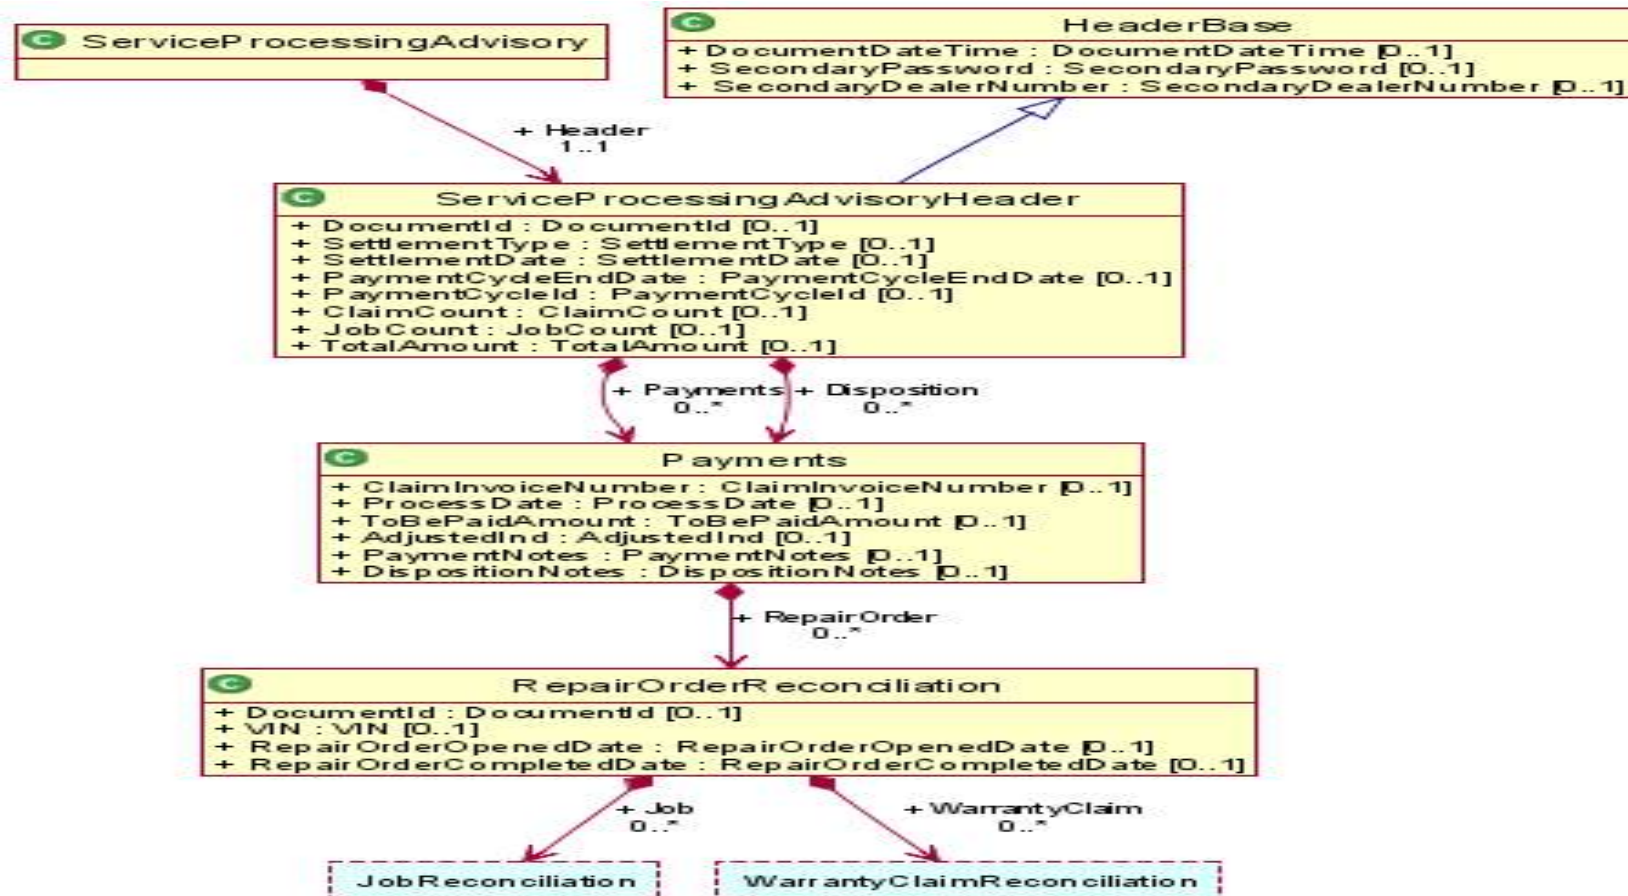

Schema Document Properties

Declared Namespaces

A schema can contain more than one namespace. According to Whatis.com, "In general, a namespace uniquely identifies a set of names so that there is no ambiguity when objects having different origins but the same names are mixed together." An example would be two namespaces that both defined an element called ID, without a namespace it would be impossible to determine which definition was being used.

Prefix	Namespace
Default namespace	http://www.starstandards.org/STAR
xml	http://www.w3.org/XML/1998/namespace
xsd	http://www.w3.org/2001/XMLSchema

Components and Data Types

Global definitions include components, code lists, and data types. Components are used to build the data structures that make up a Noun and it's requirements. Data types specify the type of data that a component's fields may contain. Not all definitions are included in this documentation. Please see either the STAR Code List guideline or Data Type Guidelines for further information.

AdjustedAmount

These field(s) use this type: AdjustedAmount.

Amount of adjustment

Name	AdjustedAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

AdjustmentReason

These field(s) use this type: AdjustmentReason,AdjustmentReason.

Name	AdjustmentReason
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
AdjustedReason	Free form text of reason(s) Claim was adjusted	O	
AdjustedAmount	Difference between the submitted amount and the paid amount	O	

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
Tax	Amount of tax on Adjusted Amount	O	

XML Instance Representation

```
<...>
  <AdjustedReason> AdjustedReason </AdjustedReason> [0..1]
  <AdjustedAmount> AdjustedAmount </AdjustedAmount> [0..1]
  <Tax> Tax </Tax> [0..*]
</...>
```

Amount

Based on OAGI Amount. Simple content with the currency as an attribute

Name	Amount
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
currency		R	

XML Instance Representation

```
<...
currency="Currency [1]">
  xsd:decimal
</...>
```

ApplicationArea

These field(s) use this type: ApplicationArea.

Name	ApplicationArea
------	-----------------

Get Service Processing Advisory

Abstract

no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Sender	Identifies characteristics and control identifiers that relate to the application that created the Business Object Document. The sender area can indicate the logical location of the application and/or database server, the application, and the task that was processing to create the BOD.	R	
CreationDateTime	is the date time stamp that the given instance of the Business Object Document was created. This date must not be modified during the life of the Business Object Document.	R	DateTime fields must be formatted as XML Schema Datetimes in UTC/GMT format without offsets. Example: 2003-11-05T13:15:30Z
Signature	If the BOD is to be signed the signature element is included, otherwise it is not. Signature supports any digital signature that maybe used by an implementation of OAGIS. The qualifyingAgency identifies the agency that provided the format for the signature. This element supports any digital signature specification that is available today and in the future. This is accomplished by not actually defining the content but by allowing the implementation to specify the digital signature to be used via an external XML Schema namespace declaration. The Signature element is defined to have any content from any other namespace. This allows the user to carry a digital signature in the xml instance of a BOD. The choice of which digital signature to use is left up to the user and their integration needs.	O	
BODId	The BODId provides a place to carry a Globally Unique Identifier (GUID) that will make each Business Object Document instance uniquely identifiable. This is a critical success factor to enable software developers to use the Globally Unique Identifier (GUID) to build the following services or capabilities: 1. Legally binding transactions, 2. Transaction logging, 3. Exception handling, 4. Re-sending, 5. Reporting, 6. Confirmations, 7. Security.	O	
Destination	Information related to the receiver of the BOD	R	

Get Service Processing Advisory

XML Instance Representation

```
<...>
  <Sender> Sender </Sender> [1]
  <CreationDateTime> DateTime </CreationDateTime> [1]
  <Signature> Signature </Signature> [0..1]
  <BODId> Code </BODId> [0..1]
  <Destination> Destination </Destination> [1]
</...>
```

ApprovedAmount

These field(s) use this type: **ApprovedAmount**.

Amount pre-approved

Name	ApprovedAmount
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
  Amount
</...>
```

BusinessObjectDocument

Name	BusinessObjectDocument
Abstract	no

Attributes

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
revision	This should contain the STAR repository version in the following recommended format. 4.2.1_M20080416. Where the first part indicates the version of the STAR repository and anything after the _ indicates the Milestone build that is being used. If referring to an official published version then only the STAR Repository version is required.	O	
release	Indicates the OAGIS release that this BOD belongs.	O	
environment	Indicates whether this BOD is being sent in a "Test" or a "Production" mode. If the BOD is being sent in a test mode, it's information should not affect the business operation. However, if the BOD is sent in "Production" mode it is assumed that all test has been complete and the contents of the BOD are to affect the operation of the receiving business application(s).	O	
lang	Indicates the language that the contents of the BOD is in unless otherwise stated.	O	
bodVersion	Deprecated as of STAR 4.2.2. It is recommended to use the revision attribute to identify the repository and the noun. May be removed in a new major version of the STAR repository. Indicates the version number of the BOD.	O	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ApplicationArea	Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of. Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.	R	

XML Instance Representation

Get Service Processing Advisory

```
<...  
revision="Text [0..1]"  
release="8.1-Lite [0..1]"  
environment="Text [0..1]"  
lang="Language [0..1]"  
bodVersion="Text [0..1]">  
  <ApplicationArea> ... </ApplicationArea> [1]  
</...>
```

ClaimCount

These field(s) use this type: **ClaimCount**.

Identifies the total number of Claims

Name	ClaimCount
Abstract	no

XML Instance Representation

```
<...>  
  Count  
</...>
```

ConfirmableVerb

Name	ConfirmableVerb
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
confirm		R	

Data Elements and Components

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
Verb		R	

XML Instance Representation

```
<...  
confirm="ConfirmType [0..1]"/>
```

Count

Simple quantity type with no attributes

Name	Count
Abstract	no

XML Instance Representation

```
<...>  
xsd:integer  
</...>
```

DealerContributionAmount

These field(s) use this type: DealerContributionAmount.

The dealer's contribution and or copay amount factored out of the total amount

Name	DealerContributionAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
Amount  
</...>
```

Get Service Processing Advisory

DeductibleAmount

These field(s) use this type: **DeductibleAmount**.

The Customer Deductible and/or Co/pay amount Amount. Eg:\$50.00

Name	DeductibleAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

Description

Description

Name	Description
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
language	The ISO language code that the description is written.	O	

XML Instance Representation

```
<...  
language="Language [0..1]">  
  xsd:string  
</...>
```

Destination

Get Service Processing Advisory

These field(s) use this type: **Destination**.

Name	Destination
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
DestinationNameCode	Code for destination of file (i.e.Short Manufacturer or DSP code)	O	Must use a valid code from the ShortMfg/RSP list on http://www.starstandards.org
DestinationURI	Physical address of the destination	O	
DestinationSoftwareCode	Additional information about the destination application	O	
DestinationSoftware	For which software destination file is intended (may not be known).	O	
DealerNumber	Target Dealer Code receiving information	O	
StoreNumber	Dealer code store number (DMS assigned)	O	
AreaNumber	Dealer code area number (DMS vendor assigned)	O	
DealerCountry	Target Dealer country location	O	
PartyId	The Party Id field uniquely identifies the Receiver of the message. This element can be used for parties within the Automotive Community as well as external parties. Party Id is not intended as a replacement for the Dealer Number. Suggested formats for OEMs or other large institutions include: DUNs Number, ShortMfgCode + DUNs, or ShortMfgCode. The suggested format for Dealers is: ShortMfgCode+Dealer Number.	O	
LocationId	The Location Id field uniquely identifies the location of the Receiver of a O message. This Id may be aligned with a physical address or data centers. This field provides an additional level of granularity beyond the usage of the Party Id for additional routing and deliver of data.		
ServiceId	The Service Id field identifies the particular service to which a message is being sent, e.g., an inventory service.	O	

Get Service Processing Advisory

XML Instance Representation

```
<...>
  <DestinationNameCode> ShortMfg </DestinationNameCode> [0..1]
  <DestinationURI> URI </DestinationURI> [0..1]
  <DestinationSoftwareCode> Text </DestinationSoftwareCode> [0..1]
  <DestinationSoftware> Text </DestinationSoftware> [0..1]
  <DealerNumber> PartyId </DealerNumber> [0..1]
  <StoreNumber> Text </StoreNumber> [0..1]
  <AreaNumber> Text </AreaNumber> [0..1]
  <DealerCountry> Country </DealerCountry> [0..1]
  <PartyId> PartyId </PartyId> [0..1]
  <LocationId> LocationId </LocationId> [0..1]
  <ServiceId> ServiceId </ServiceId> [0..1]
</...>
```

DispositionReason

These field(s) use this type: **DispositionReason,DispositionReason.**

Name	DispositionReason
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
DispositionStatus	Disposition of request Ex: Rejected, Partial Payment, etc.)	O	
DispositionReasonCode	Substantiating reason for arriving at disposition	O	
DispositionReasonCodeDesc	Description of disposition Reason code	O	

XML Instance Representation

```
<...>
  <DispositionStatus> DispositionStatus </DispositionStatus> [0..1]
  <DispositionReasonCode> DispositionReasonCode </DispositionReasonCode> [0..1]
  <DispositionReasonCodeDesc> DispositionReasonCodeDesc </DispositionReasonCodeDesc> [0..1]
</...>
```

Get Service Processing Advisory

```
</...>
```

DispositionReasonCodeDesc

These field(s) use this type: DispositionReasonCodeDesc.

Description of disposition Reason code

Name	DispositionReasonCodeDesc
Abstract	no

XML Instance Representation

```
<...  
  language="Language [0..1]">  
  Description  
</...>
```

DocumentId

These field(s) use this type: DocumentId,DocumentId.

Is the identifier for the document.

Name	DocumentId
Abstract	no

XML Instance Representation

```
<...>  
  Id  
</...>
```

ExpressionCriteria

Name	ExpressionCriteria
-------------	--------------------

Get Service Processing Advisory

Abstract	no
-----------------	----

Attributes

Field / Component	Description	R/O	Business Rule
expressionLanguage		O	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
SelectExpression	Allows the 1-n number of selection expressions for the information to be R returned.		

XML Instance Representation

```
<...  
expressionLanguage="ExpressionLanguage [0..1]">  
  <SelectExpression> Expression </SelectExpression> [1..*]  
</...>
```

Get

These field(s) use this type: Get.

Name	Get
-------------	-----

Abstract	no
-----------------	----

Attributes

Field / Component	Description	R/O	Business Rule
show		R	

Data Elements and Components

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
Verb		R	
ReturnCriteria	ReturnCriteria identifies the content that is to be returned, given query success. In essence, the expression here has the effect of filtering the part(s) of the found element(s) that are to be returned. ReturnCriteria plays no role in the query itself. That is handled as a match against the request BOD's noun exemplar. ReturnCriteria allows the sender of the BOD to indicate which information (down to the field level) is requested to be returned, given that the query has been successful in matching the exemplar to existing nouns. That is, in a GetListPurchaseOrder, if one or more PurchaseOrders with a TotalPrice = \$1M were found, ReturnCriteria tells the BOD recipient which parts of the PurchaseOrder should be populated with content when the response (ShowPurchaseOrder) is formulated. The expressionLanguage indicates the expression language being used. In order for the ReturnCriteria expression to be evaluable by the BOD recipient, the recipient must be capable of processing and interpreting the specified expression language. XPath is the default, due to its ubiquity among XML processing technologies.	R	

XML Instance Representation

```
<...  
confirm="ConfirmType [0..1]"  
show="Always [1]">  
  <ReturnCriteria> ... </ReturnCriteria> [1]  
</...>
```

GetServiceProcessingAdvisory

These field(s) use this type: GetServiceProcessingAdvisory.

Name	GetServiceProcessingAdvisory
Abstract	no

Data Elements and Components

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
ApplicationArea	Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of. Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.	R	
DataArea		R	

XML Instance Representation

```
<...  
revision="Text [0..1]"  
release="8.1-Lite [0..1]"  
environment="Text [0..1]"  
lang="Language [0..1]"  
bodVersion="Text [0..1]">  
  <ApplicationArea> ... </ApplicationArea> [1]  
  <DataArea> GetServiceProcessingAdvisoryDataArea </DataArea> [1]  
</...>
```

GetServiceProcessingAdvisoryDataArea

These field(s) use this type: DataArea.

Name	GetServiceProcessingAdvisoryDataArea
Abstract	no

Data Elements and Components

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
Get	<p>The Get verb is to communicate to a business software component a request for an existing piece of information to be returned. The Get may be paired with most of the nouns defined in the OAGIS specification. The response to this request is the Show verb. The behavior of a BOD with a Get verb is quite predictable across most of the nouns it may be paired with. The Get is designed to retrieve a single piece of information by using that information's primary retrieval field, or key field. The Get verb is not used to request several documents at once. The GetList verb is designed to achieve that purpose and will be covered in more detail later.</p> <p>Selection Criteria: There are two types of selection capabilities for most BOD's that use the Get verb.</p> <p>1) The first selection capability is called Field-Based Selection. Within a Get-based Business Object Document, the first Data Type that occurs in a specific BOD structure is commonly used to provide the Field-Based Selection criteria. This is always defined within the specific BOD and is commonly the required fields for that specific Data type. The Field-Based Selection enables the requester to provide a value or values (in the case of multiple required Field Identifiers), in the required fields. Then the responding component uses those values to find and return the requested information to the originating business software component.</p> <p>2) The second type of selection capability for Get-based BODs is called Data Type Selection. Data Type selection enables the requester to identify which Data Types within the noun are requested to be returned in the response. The use of this capability is described for each corresponding Data Type for all BODs that use the Get verb. The Data Types are identified for retrieval within the Get instance of a BOD by including the name of the Data Type in the meta data but without any Field Identifiers or Segments identified within the Data Type. This will signify to the responding application that all of the data that corresponds to that Data Type is to be included in the response. If the Data Type is not requested, the Data Type identifier is not included in the Get request and this will signify to the responding component that the Data Type is not to be returned.</p>	R	
ServiceProcessingAdvisory		R	

XML Instance Representation

```
<...>  
<Get> ... </Get> [1]
```

Get Service Processing Advisory

```
<ServiceProcessingAdvisory> ... </ServiceProcessingAdvisory> [1..*]  
</...>
```

HeaderBase

Used on all STAR BODs

Name	HeaderBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
DocumentDateTime	Is the date and time the document was last created. This is not the date and time that the BOD message instance was created.	O	
SecondaryPassword	Secondary password used to validate access to the dealer information	O	
SecondaryDealerNumber	Identifies secondary dealer number if different than primary "Dealer Number"	O	

XML Instance Representation

```
<...>  
  <DocumentDateTime> DocumentDateTime </DocumentDateTime> [0..1]  
  <SecondaryPassword> SecondaryPassword </SecondaryPassword> [0..1]  
  <SecondaryDealerNumber> SecondaryDealerNumber </SecondaryDealerNumber> [0..1]  
</...>
```

Id

These field(s) use this type: **AuthorizationId**.

Party Identification number

Name	Id
Abstract	no

Get Service Processing Advisory

XML Instance Representation

```
<...>  
  xsd:string  
</...>
```

JobCount

These field(s) use this type: **JobCount**.

Identifies the total number of jobs

Name	JobCount
Abstract	no

XML Instance Representation

```
<...>  
  Count  
</...>
```

JobReconciliation

These field(s) use this type: **Job,Job**.

Name	JobReconciliation
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
JobNumber	DMS assigned job or line identification number	O	
OperationId	Dealer or DMS assigned operation code identifier	O	
AdjustedInd	Indicates that the final payment Amount was adjusted from the original submission amount during processing	O	
ApprovedAmount	Total Payment amount approved	O	

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
LaborAmount	Labor portion of total approved amount	O	
PartsAmount	Parts portion of total approved amount	O	
OtherAmount	Everything that is not included in total approved amount such as sublets, GOG, transportation, towing, etc.	O	
Tax	Amount of job tax for total, labor, parts, prorated and other.	O	
ProratedAmount	Total payment amount after application of Customer pay Deductible and/or Co/pay amounts	O	
AdjustmentReason	Reason that adjustment was made on request	O	
DispositionReason	Reason that disposition was changed on request	O	
WarrantyClaim	Warranty Claim information associated with Job	O	
ClaimType	Identifier of the type of claim the job is associated with.	O	
PaidAmount	Total paid amount without deductions and/or co-pay amounts.	O	

XML Instance Representation

```
<...>
  <JobNumber> JobNumber </JobNumber> [0..1]
  <OperationId> OperationId </OperationId> [0..1]
  <AdjustedInd> AdjustedInd </AdjustedInd> [0..1]
  <ApprovedAmount> ApprovedAmount </ApprovedAmount> [0..1]
  <LaborAmount> LaborAmount </LaborAmount> [0..1]
  <PartsAmount> PartsAmount </PartsAmount> [0..1]
  <OtherAmount> OtherAmount </OtherAmount> [0..1]
  <Tax> Tax </Tax> [0..*]
  <ProratedAmount> ProratedAmount </ProratedAmount> [0..1]
  <AdjustmentReason> AdjustmentReason </AdjustmentReason> [0..*]
  <DispositionReason> DispositionReason </DispositionReason> [0..*]
  <WarrantyClaim> WarrantyClaimReconciliation </WarrantyClaim> [0..*]
  <ClaimType> ClaimType </ClaimType> [0..1]
  <PaidAmount> PaidAmount </PaidAmount> [0..1]
</...>
```

Get Service Processing Advisory

LaborAmount

These field(s) use this type: LaborAmount.

Labor Amount

Name	LaborAmount
Abstract	no

XML Instance Representation

```
<...  
  currency="Currency [1]">  
    Amount  
</...>
```

LocationId

These field(s) use this type: LocationId,LocationId.

Code identifying a physical location

Name	LocationId
Abstract	no

XML Instance Representation

```
<...>  
  Id  
</...>
```

NonTaxableAmount

These field(s) use this type: NonTaxableAmount.

Total non-taxable price.

Name	NonTaxableAmount
-------------	------------------

Get Service Processing Advisory

Abstract	no
-----------------	----

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

OperationId

These field(s) use this type: **OperationId**.

Dealer or DMS assigned operation code identifier

Name	OperationId
Abstract	no

XML Instance Representation

```
<...>  
  Id  
</...>
```

OtherAmount

These field(s) use this type: **OtherAmount**.

Other Amount

Name	OtherAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount
```

Get Service Processing Advisory

```
</...>
```

PaidAmount

These field(s) use this type: **PaidAmount**.

Total paid amount without deductions and/or co-pay amounts.

Name	PaidAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

PartsAmount

These field(s) use this type: **PartsAmount**.

Parts Amount

Name	PartsAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

PartyId

These field(s) use this type: **DealerNumber,PartyId,DealerNumber,PartyId**.

Get Service Processing Advisory

Party Identification Number

Name	PartyId
Abstract	no

XML Instance Representation

```
<...>
  Id
</...>
```

PaymentCycleId

These field(s) use this type: PaymentCycleId.

Identifies a Payment Cycle

Name	PaymentCycleId
Abstract	no

XML Instance Representation

```
<...>
  Id
</...>
```

Payments

These field(s) use this type: Payments,Disposition.

Name	Payments
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ClaimInvoiceNumber	Invoice number that Claim was paid from	O	

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
ProcessDate	Effective date of process	O	
ToBePaidAmount	Amount paid on Warranty Claim, not necessarily the amount claimed	O	
AdjustedInd	Indicates that the final payment Amount was adjusted from the original submission amount during processing	O	
RepairOrder	Repair Order information associated with a Payment/Disposition.	O	
PaymentNotes	Notes from OEM to dealer regarding this payment	O	
DispositionNotes	Notes from OEM to dealer regarding disposition of this request	O	

XML Instance Representation

```
<...>
  <ClaimInvoiceNumber> ClaimInvoiceNumber </ClaimInvoiceNumber> [0..1]
  <ProcessDate> ProcessDate </ProcessDate> [0..1]
  <ToBePaidAmount> ToBePaidAmount </ToBePaidAmount> [0..1]
  <AdjustedInd> AdjustedInd </AdjustedInd> [0..1]
  <RepairOrder> RepairOrderReconciliation </RepairOrder> [0..*]
  <PaymentNotes> PaymentNotes </PaymentNotes> [0..1]
  <DispositionNotes> DispositionNotes </DispositionNotes> [0..1]
</...>
```

Percent

Percent

Name	Percent
Abstract	no

XML Instance Representation

```
<...>
  xsd:decimal
</...>
```

Get Service Processing Advisory

ProratedAmount

These field(s) use this type: **ProratedAmount**.

Prorated Amount

Name	ProratedAmount
Abstract	no

XML Instance Representation

```
<...  
  currency="Currency [1]">  
    Amount  
</...>
```

RepairOrderReconciliation

These field(s) use this type: **RepairOrder**.

Name	RepairOrderReconciliation
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
DocumentId	Repair Order Number - Identification number of repair order assigned by O dealer or DMS		
VIN	Federally defined 17 position vehicle identification number	O	
RepairOrderOpenedDate	System date when Repair Order was opened	O	
RepairOrderCompletedDate	The date the last line was closed on the repair order	O	
Job	Job information associated with a Repair Order	O	
WarrantyClaim	Warranty Claim information associated with a Repair Order	O	

Get Service Processing Advisory

XML Instance Representation

```
<...>
  <DocumentId> DocumentId </DocumentId> [0..1]
  <VIN> VIN </VIN> [0..1]
  <RepairOrderOpenedDate> RepairOrderOpenedDate </RepairOrderOpenedDate> [0..1]
  <RepairOrderCompletedDate> RepairOrderCompletedDate </RepairOrderCompletedDate> [0..1]
  <Job> JobReconciliation </Job> [0..*]
  <WarrantyClaim> WarrantyClaimReconciliation </WarrantyClaim> [0..*]
</...>
```

RequestVerb

Name	RequestVerb
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Verb		R	
ReturnCriteria	ReturnCriteria identifies the content that is to be returned, given query success. In essence, the expression here has the effect of filtering the part(s) of the found element(s) that are to be returned. ReturnCriteria plays no role in the query itself. That is handled as a match against the request BOD's noun exemplar. ReturnCriteria allows the sender of the BOD to indicate which information (down to the field level) is requested to be returned, given that the query has been successful in matching the exemplar to existing nouns. That is, in a GetListPurchaseOrder, if one or more PurchaseOrders with a TotalPrice = \$1M were found, ReturnCriteria tells the BOD recipient which parts of the PurchaseOrder should be populated with content when the response (ShowPurchaseOrder) is formulated. The expressionLanguage indicates the expression language being used. In order for the ReturnCriteria expression to be evaluable by the BOD recipient, the recipient must be capable of processing and interpreting the specified expression language. XPath is the default, due to its ubiquity among XML processing technologies.	R	

Get Service Processing Advisory

XML Instance Representation

```
<...  
confirm="ConfirmType [0..1]">  
  <ReturnCriteria> ... </ReturnCriteria> [1]  
</...>
```

SecondaryDealerNumber

These field(s) use this type: **SecondaryDealerNumber**.

Identifies secondary dealer number if different than primary "Dealer Number"

Name	SecondaryDealerNumber
Abstract	no

XML Instance Representation

```
<...>  
  Id  
</...>
```

Sender

These field(s) use this type: **Sender**.

Name	Sender
Abstract	no

Data Elements and Components

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
LogicalId	Provides the logical location of the server and applications from which the Business Object Document originated. It can be used to establish a logical to physical mapping, however its use is optional. Each system or combination of systems should maintain an external central reference table containing the logical names or logical addresses of the application systems in the integration configuration. This enables the logical names to be mapped to the physical network addresses of the resources needed on the network. Note: The technical implementation of this Domain Naming Service is not dictated by this specification. This logical to physical mapping may be done at execution time by the application itself or by a middleware transport mechanism, depending on the integration architecture used. This provides for a simple but effective directory access capability while maintaining application independence from the physical location of those resources on the network	O	
Component	Provides a finer level of control than Logical Identifier and represents the business application that issued the Business Object Document. Its use is optional. For STAR's use this is the DCS Software code name		
Task	Describes the business event that initiated the need for the Business Object Document to be created. For STAR, the task is defined in the Implementation Guidelines for each BOD. It is usually a short description of the BOD. Ex: SalesLead, CreditDecision, etc.	R	
ReferenceId	Enables the sending application to indicate the instance identifier of the event or task that caused the BOD to be created. This is used to correlate a response BOD to an originating BOD	O	
AuthorizationId	Identifies the authorization level of the user or application that is sending the Business Object Document Message. This authorization level being recognized by the receiving system indicates what can be done on the receiving system. For STAR, this is the User ID.	O	
CreatorNameCode	DCS Software Creator Code	R	
SenderNameCode	Additional information about the sending platform (i.e., Short MFG or DSP code).	R	Must use a valid code from the ShortMfg/RSP list on http://www.starstandards.org
SenderURI	Physical address of the sender	O	

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
DealerNumber	Dealer Code of source of information	O	DealerNumber is Required if originating from the DMS.
StoreNumber	Dealer code store number (DMS assigned)	O	
AreaNumber	Dealer code area number (DMS vendor assigned)	O	
DealerCountry	Source Dealer country location	O	
Language	This code is used to define the language of the data used in this transaction	O	
DeliverPendingMailInd	Indicates if the user requests to receive pending mail that has been stored O and has yet not been delivered yet. By selecting 0, the user will only receive the response for the current transaction the user is performing.		
Password	Token for application specific authentication. Used to authenticate dealership/users through application specific security	O	
SystemVersion	The sender's software version number.	O	
PartyId	The Party Id field uniquely identifies the Sender of the message. This element can be used for parties within the Automotive Community as well as external parties. Party Id is not intended as a replacement for the Dealer Number. Suggested formats for OEMs or other large institutions include: DUNs Number, ShortMfgCode + DUNs, or ShortMfgCode. The suggested format for Dealers is: ShortMfgCode+Dealer Number.	O	
LocationId	The Location Id field uniquely identifies the location of the Sender of a message. This Id may be aligned with a physical address or data centers. This field provides an additional level of granularity beyond the usage of the Party Id for additional routing and deliver of data.	O	
ServiceId	The Service Id field identifies the particular service from which a message is being sent, e.g., an inventory service.	O	

XML Instance Representation

```
<...>
  <LogicalId> Text </LogicalId> [0..1]
```

Get Service Processing Advisory

```
<Component> Text </Component> [1]
<Task> Text </Task> [1]
<ReferenceId> Reference </ReferenceId> [0..1]
<AuthorizationId> Id </AuthorizationId> [0..1]
<CreatorNameCode> Text </CreatorNameCode> [1]
<SenderNameCode> ShortMfg </SenderNameCode> [1]
<SenderURI> URI </SenderURI> [0..1]
<DealerNumber> PartyId </DealerNumber> [0..1]
<StoreNumber> Text </StoreNumber> [0..1]
<AreaNumber> Text </AreaNumber> [0..1]
<DealerCountry> Country </DealerCountry> [0..1]
<Language> Language </Language> [0..1]
<DeliverPendingMailInd> Indicator </DeliverPendingMailInd> [0..1]
<Password> Text </Password> [0..1]
<SystemVersion> SystemVersion </SystemVersion> [0..1]
<PartyId> PartyId </PartyId> [0..1]
<LocationId> LocationId </LocationId> [0..1]
<ServiceId> ServiceId </ServiceId> [0..1]
</...>
```

SenderBase

Name	SenderBase
Abstract	no

Data Elements and Components

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
LogicalId	Provides the logical location of the server and applications from which the Business Object Document originated. It can be used to establish a logical to physical mapping, however its use is optional. Each system or combination of systems should maintain an external central reference table containing the logical names or logical addresses of the application systems in the integration configuration. This enables the logical names to be mapped to the physical network addresses of the resources needed on the network. Note: The technical implementation of this Domain Naming Service is not dictated by this specification. This logical to physical mapping may be done at execution time by the application itself or by a middleware transport mechanism, depending on the integration architecture used. This provides for a simple but effective directory access capability while maintaining application independence from the physical location of those resources on the network	O	
Component	Provides a finer level of control than Logical Identifier and represents the business application that issued the Business Object Document. Its use is optional. For STAR's use this is the DCS Software code name		
Task	Describes the business event that initiated the need for the Business Object Document to be created. For STAR, the task is defined in the Implementation Guidelines for each BOD. It is usually a short description of the BOD. Ex: SalesLead, CreditDecision, etc.	R	
ReferenceId	Enables the sending application to indicate the instance identifier of the event or task that caused the BOD to be created. This is used to correlate a response BOD to an originating BOD	O	
AuthorizationId	Identifies the authorization level of the user or application that is sending the Business Object Document Message. This authorization level being recognized by the receiving system indicates what can be done on the receiving system. For STAR, this is the User ID.	O	

XML Instance Representation

```
<...>
  <LogicalId> Text </LogicalId> [0..1]
  <Component> Text </Component> [1]
  <Task> Text </Task> [1]
```


Get Service Processing Advisory

```
<ReferenceId> Reference </ReferenceId> [0..1]
<AuthorizationId> Id </AuthorizationId> [0..1]
</...>
```

ServiceId

These field(s) use this type: **ServiceId,ServiceId.**

The Service Id field identifies the particular service to or from which a message is being sent, e.g., an inventory service.

Name	ServiceId
Abstract	no

XML Instance Representation

```
<...>
  Id
</...>
```

ServiceProcessingAdvisory

These field(s) use this type: **ServiceProcessingAdvisory.**

STAR Version 3.0 - Draft

STAR Version 2.1, STAR approved 04/20/2005; effective date 07/04/2005

STAR Version 2.0, STAR approved 05/07/2004; effective date 07/04/2004

STAR Version 1.0, STAR approved 8/7/2002; OAGI approved 8/16/2002; effective date 1/01/2003

Name	ServiceProcessingAdvisory
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Header		R	

Get Service Processing Advisory

XML Instance Representation

```
<...>
  <Header> ... </Header> [1]
</...>
```

ServiceProcessingAdvisoryHeader

These field(s) use this type: **Header**.

.

Name	ServiceProcessingAdvisoryHeader
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
DocumentDateTime	Is the date and time the document was last created. This is not the date and time that the BOD message instance was created.	O	
SecondaryPassword	Secondary password used to validate access to the dealer information	O	
SecondaryDealerNumber	Identifies secondary dealer number if different than primary "Dealer Number"	O	
DocumentId	The unique identifier of the settlement instrument EX: Check Number	O	(INACTIVE)
SettlementType	Method that was used for settlement transfer of funds	O	(INACTIVE)
SettlementDate	Date that funds are transferred between the OEM and the Dealer	O	(INACTIVE) YYYY-MM-DD
PaymentCycleEndDate	Ending date of Payment Cycle	O	YYYY-MM-DD
PaymentCycleId	Identifies a Payment Cycle	O	
ClaimCount	Identifies the total number of Claims within the Payment Cycle.	O	(INACTIVE)

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
JobCount	Identifies the total number of jobs within the Payment Cycle.	O	(INACTIVE)
TotalAmount	Identifies the total amount of the Payment Cycle.	O	(INACTIVE)
Payments	Contains Information for request that was submitted. This component may contain additional sub-components with detail on request for payment.	O	(INACTIVE)
Disposition	Contains Information for request that was submitted. This component may contain additional sub-components with detail on reason for change in disposition of request for payment.	O	(INACTIVE)

XML Instance Representation

```
<...>
  <DocumentDateTime> DocumentDateTime </DocumentDateTime> [0..1]
  <SecondaryPassword> SecondaryPassword </SecondaryPassword> [0..1]
  <SecondaryDealerNumber> SecondaryDealerNumber </SecondaryDealerNumber> [0..1]
  <DocumentId> DocumentId </DocumentId> [0..1]
  <SettlementType> SettlementType </SettlementType> [0..1]
  <SettlementDate> SettlementDate </SettlementDate> [0..1]
  <PaymentCycleEndDate> PaymentCycleEndDate </PaymentCycleEndDate> [0..1]
  <PaymentCycleId> PaymentCycleId </PaymentCycleId> [0..1]
  <ClaimCount> ClaimCount </ClaimCount> [0..1]
  <JobCount> JobCount </JobCount> [0..1]
  <TotalAmount> TotalAmount </TotalAmount> [0..1]
  <Payments> Payments </Payments> [0..*]
  <Disposition> Payments </Disposition> [0..*]
</...>
```

Signature

These field(s) use this type: **Signature**.

Name	Signature
------	-----------

Get Service Processing Advisory

Abstract no

Attributes

Field / Component	Description	R/O	Business Rule
qualifyingAgency		O	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
-------------------	-------------	-----	---------------

XML Instance Representation

```
<...  
qualifyingAgency="Text [0..1]">  
Allow any elements from any namespace (strict validation). [0..1]  
</...>
```

Tax

These field(s) use this type: **Tax,Tax,Tax,Tax.**

Name Tax

Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
TaxType	Identifies the type tax.	R	
TaxDescription	Free form text description of tax amount.	O	
TaxAmount	Actual amount of tax paid.	O	
UnitSalesTaxAmount	Unit amount of sales tax.	O	
TaxRate	Tax Percentage Rate	O	

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
TotalTaxableAmount	Total taxable price	O	
NonTaxableAmount	Total non-taxble price	O	
TaxTypeId	Tax type identification	O	
TaxabilityInd	Determines whether the dealer wants to claim tax on the cost.	O	

XML Instance Representation

```
<...>
  <TaxType> TaxType </TaxType> [1]
  <TaxDescription> TaxDescription </TaxDescription> [0..1]
  <TaxAmount> TaxAmount </TaxAmount> [0..1]
  <UnitSalesTaxAmount> UnitSalesTaxAmount </UnitSalesTaxAmount> [0..1]
  <TaxRate> TaxRate </TaxRate> [0..1]
  <TotalTaxableAmount> TotalTaxableAmount </TotalTaxableAmount> [0..1]
  <NonTaxableAmount> NonTaxableAmount </NonTaxableAmount> [0..1]
  <TaxTypeId> TaxTypeId </TaxTypeId> [0..1]
  <TaxabilityInd> TaxabilityInd </TaxabilityInd> [0..1]
</...>
```

TaxAmount

These field(s) use this type: **TaxAmount**.

Actual amount of tax paid.

Name	TaxAmount
Abstract	no

XML Instance Representation

```
<...
  currency="Currency [1]">
    Amount
  </...>
```

Get Service Processing Advisory

TaxDescription

These field(s) use this type: TaxDescription.

Free form text description of tax amount.

Name	TaxDescription
Abstract	no

XML Instance Representation

```
<...  
  language="Language [0..1]">  
    Description  
</...>
```

TaxRate

These field(s) use this type: TaxRate.

Tax Percentage rate.

Name	TaxRate
Abstract	no

XML Instance Representation

```
<...>  
  Percent  
</...>
```

ToBePaidAmount

These field(s) use this type: ToBePaidAmount,ToBePaidAmount.

Amount to be paid

Name	ToBePaidAmount
-------------	-----------------------

Get Service Processing Advisory

Abstract	no
-----------------	----

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

TotalAmount

These field(s) use this type: TotalAmount.

Total price (cost + markup)

Name	TotalAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

TotalTaxableAmount

These field(s) use this type: TotalTaxableAmount.

Total taxable price.

Name	TotalTaxableAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">
```

Get Service Processing Advisory

```
Amount
</...>
```

UnitSalesTaxAmount

These field(s) use this type: UnitSalesTaxAmount.

Unit amount of sales tax.

Name	UnitSalesTaxAmount
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
  Amount
</...>
```

Verb

These field(s) use this type: Verb.

Name	Verb
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
-------------------	-------------	-----	---------------

XML Instance Representation

```
<.../>
```

WarrantyClaimBase

Name	WarrantyClaimBase
-------------	-------------------

Get Service Processing Advisory

Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ClaimNumber	Identifier of claim entered by dealer	O	
ClaimType	Identifier of the type of claim	O	
OEMClaimNumber	Assigned by OEM at time of claim processing	O	
ExternalReferenceNumber	Secondary identifying scheme that is meaningful to claimant	O	

XML Instance Representation

```
<...>
  <ClaimNumber> ClaimNumber </ClaimNumber> [0..1]
  <ClaimType> ClaimType </ClaimType> [0..1]
  <OEMClaimNumber> OEMClaimNumber </OEMClaimNumber> [0..1]
  <ExternalReferenceNumber> ExternalReferenceNumber </ExternalReferenceNumber> [0..1]
</...>
```

WarrantyClaimDeductible

These field(s) use this type: WarrantyClaimDeductible.

Name WarrantyClaimDeductible

Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
DeductibleType	The type of customer deductible. Eg: Service Contract	O	
DeductibleAmount	The Customer Deductible and/or Co/pay amount factored out of the total Claim Amount. Eg:\$50.00	O	
Tax	Amount of tax on Warranty Claim for Claim and Dealer	O	

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
DeductibleWaiverInd	Indicates that the dealer waived the deductible or changed the deductible from an amount greater than zero to zero.	O	

XML Instance Representation

```
<...>
  <DeductibleType> DeductibleType </DeductibleType> [0..1]
  <DeductibleAmount> DeductibleAmount </DeductibleAmount> [0..1]
  <Tax> Tax </Tax> [0..*]
  <DeductibleWaiverInd> DeductibleWaiverInd </DeductibleWaiverInd> [0..1]
</...>
```

WarrantyClaimReconciliation

These field(s) use this type: WarrantyClaim,WarrantyClaim.

Name	WarrantyClaimReconciliation
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ClaimNumber	Identifier of claim entered by dealer	O	
ClaimType	Identifier of the type of claim	O	
OEMClaimNumber	Assigned by OEM at time of claim processing	O	
ExternalReferenceNumber	Secondary identifying scheme that is meaningful to claimant	O	
WarrantyClaimDeductible	Deductible information associated with Warranty Claim	O	
AdjustedInd	Indicates that the final payment Amount was adjusted from the original submission amount during processing	O	
ToBePaidAmount	Amount paid on claim, not necessarily the amount claimed	O	

Get Service Processing Advisory

Field / Component	Description	R/O	Business Rule
AdjustmentReason	Reason that adjustment was made on request	O	
DispositionReason	Reason that disposition was changed on request	O	
Job	Job information associated with a Warranty Claim.	O	
ClaimGasInd	Determines whether the cost of gas is included in the request for reimbursement	O	
WarrantyNotes	Notes from OEM to dealer regarding this claim	O	
DealerContributionAmount	The dealer's contribution and or copay amount factored out of the total claim amount	O	
Tax	Amount of tax on Warranty Claim for Claim and Dealer	O	

XML Instance Representation

```
<...>
  <ClaimNumber> ClaimNumber </ClaimNumber> [0..1]
  <ClaimType> ClaimType </ClaimType> [0..1]
  <OEMClaimNumber> OEMClaimNumber </OEMClaimNumber> [0..1]
  <ExternalReferenceNumber> ExternalReferenceNumber </ExternalReferenceNumber> [0..1]
  <WarrantyClaimDeductible> WarrantyClaimDeductible </WarrantyClaimDeductible> [0..*]
  <AdjustedInd> AdjustedInd </AdjustedInd> [0..1]
  <ToBePaidAmount> ToBePaidAmount </ToBePaidAmount> [0..1]
  <AdjustmentReason> AdjustmentReason </AdjustmentReason> [0..*]
  <DispositionReason> DispositionReason </DispositionReason> [0..*]
  <Job> JobReconciliation </Job> [0..*]
  <ClaimGasInd> ClaimGasInd </ClaimGasInd> [0..1]
  <WarrantyNotes> WarrantyNotes </WarrantyNotes> [0..1]
  <DealerContributionAmount> DealerContributionAmount </DealerContributionAmount> [0..1]
  <Tax> Tax </Tax> [0..*]
</...>
```

AdjustedInd

These field(s) use this type: **AdjustedInd, AdjustedInd, AdjustedInd.**

Get Service Processing Advisory

Indicates that the Amount was adjusted

Name	AdjustedInd
*Base XSD Type: string	
Code Value	Description
0	
1	

AdjustedReason

These field(s) use this type: AdjustedReason.

Free form text of reason(s) for adjustment

Name	AdjustedReason
*Base XSD Type: string	

ClaimGasInd

These field(s) use this type: ClaimGasInd.

Determines whether the cost of gas is included in the request for reimbursement

Name	ClaimGasInd
*Base XSD Type: string	
Code Value	Description
0	
1	

Get Service Processing Advisory

ClaimInvoiceNumber

These field(s) use this type: ClaimInvoiceNumber.

Claim Invoice number

Name	ClaimInvoiceNumber
-------------	---------------------------

*Base XSD Type: string

ClaimNumber

These field(s) use this type: ClaimNumber.

Identifier of claim entered by dealer

Name	ClaimNumber
-------------	--------------------

*Base XSD Type: string

ClaimType

These field(s) use this type: ClaimType,ClaimType.

Identifier of the type of claim

Name	ClaimType
-------------	------------------

*Base XSD Type: string

Code

These field(s) use this type: BODId.

Unique code name

Name	Code
-------------	-------------

*Base XSD Type: string

ConfirmType

Name	ConfirmType
*Base XSD Type: NMTOKEN	
Code Value	Description
Always	
OnChange	
Never	

Country

These field(s) use this type: **DealerCountry,DealerCountry.**

Country in which the Address is in. Conforms to ISO 3166-2. AF -AFGHANISTAN AL -ALBANIA DZ -ALGERIA AS -AMERICAN SAMOA AD -ANDORRA AO -ANGOLA AI -ANGUILLA AQ -ANTARCTICA AG -ANTIGUA AND BARBUDA AR -ARGENTINA AM -ARMENIA AW -ARUBA AU -AUSTRALIA AT -AUSTRIA AZ -AZERBAIJAN BS -BAHAMAS BH -BAHRAIN BD -BANGLADESH BB -BARBADOS BY -BELARUS BE -BELGIUM BZ -BELIZE BJ -BENIN BM -BERMUDA BT -BHUTAN BO -BOLIVIA BA -BOSNIA AND HERZEGOVINA BW -BOTSWANA BV -BOUVET ISLAND BR -BRAZIL IO -BRITISH INDIAN OCEAN TERRITORY BN -BRUNEI DARUSSALAM BG -BULGARIA BF -BURKINA FASO BI -BURUNDI KH -CAMBODIA CM -CAMEROON CA -CANADA CV -CAPE VERDE KY -CAYMAN ISLANDS CF -CENTRAL AFRICAN REPUBLIC TD -CHAD CL -CHILE CN -CHINA CX -CHRISTMAS ISLAND CC -COCOS (KEELING) ISLANDS CO -COLOMBIA KM -COMOROS CG -CONGO CD -CONGO, THE DEMOCRATIC REPUBLIC OF THE CK -COOK ISLANDS CR -COSTA RICA CI -CÔTE D'IVOIRE HR -CROATIA CU -CUBA CY -CYPRUS CZ -CZECH REPUBLIC DK -DENMARK DJ -DJIBOUTI DM -DOMINICA DO -DOMINICAN REPUBLIC EC -ECUADOR EG -EGYPT SV -EL SALVADOR GQ -EQUATORIAL GUINEA ER -ERITREA EE -ESTONIA ET -ETHIOPIA FK -FALKLAND ISLANDS (MALVINAS) FO -FAROE ISLANDS FJ -FIJI FI -FINLAND FR -FRANCE GF -FRENCH GUIANA PF -FRENCH POLYNESIA TF -FRENCH SOUTHERN TERRITORIES GA -GABON GM -GAMBIA GE -GEORGIA DE -GERMANY GH -GHANA GI -GIBRALTAR GR -GREECE GL -GREENLAND GD -GRENADA GP -GUADELOUPE GU -GUAM GT -GUATEMALA GN -GUINEA GW -GUINEA-BISSAU GY -GUYANA HT -HAITI HM -HEARD ISLAND AND MCDONALD ISLANDS VA -HOLY SEE (VATICAN CITY STATE) HN -HONDURAS HK -HONG KONG HU -HUNGARY IS -ICELAND IN -INDIA ID -INDONESIA IR -IRAN, ISLAMIC REPUBLIC OF IQ -IRAQ IE -IRELAND IL -ISRAEL IT -ITALY JM -JAMAICA JP -JAPAN JO -JORDAN KZ -KAZAKHSTAN KE -KENYA KI -KIRIBATI KP -KOREA, DEMOCRATIC PEOPLE'S REPUBLIC OF KR -KOREA, REPUBLIC OF KW -KUWAIT KG -KYRGYZSTAN LA -LAO PEOPLE'S DEMOCRATIC REPUBLIC LV -LATVIA LB -LEBANON LS -LESOTHO LR -LIBERIA LY -LIBYAN ARAB JAMAHIRIYA LI -LIECHTENSTEIN LT -LITHUANIA LU -LUXEMBOURG MO -MACAO MK -MACEDONIA, THE FORMER YUGOSLAV REPUBLIC OF MG -MADAGASCAR MW

Get Service Processing Advisory

-MALAWI MY -MALAYSIA MV -MALDIVES ML -MALI MT -MALTA MH -MARSHALL ISLANDS MQ -MARTINIQUE MR -MAURITANIA MU -MAURITIUS YT -MAYOTTE MX -MEXICO FM -MICRONESIA, FEDERATED STATES OF MD -MOLDOVA, REPUBLIC OF MC -MONACO MN -MONGOLIA MS -MONTERRAT MA -MOROCCO MZ -MOZAMBIQUE MM -MYANMAR NA -NAMIBIA NR -NAURU NP -NEPAL NL -NETHERLANDS AN -NETHERLANDS ANTILLES NC -NEW CALEDONIA NZ -NEW ZEALAND NI -NICARAGUA NE -NIGER NG -NIGERIA NU -NIUE NF -NORFOLK ISLAND MP -NORTHERN MARIANA ISLANDS NO -NORWAY OM -OMAN PK -PAKISTAN PW -PALAU PS -PALESTINIAN TERRITORY, OCCUPIED PA -PANAMA PG -PAPUA NEW GUINEA PY -PARAGUAY PE -PERU PH -PHILIPPINES PN -PITCAIRN PL -POLAND PT -PORTUGAL PR -PUERTO RICO QA -QATAR RE -RÅ#Â#UNION RO -ROMANIA RU -RUSSIAN FEDERATION RW -RWANDA SH -SAINT HELENA KN -SAINT KITTS AND NEVIS LC -SAINT LUCIA PM -SAINT PIERRE AND MIQUELON VC -SAINT VINCENT AND THE GRENADINES WS -SAMOA SM -SAN MARINO ST -SAO TOME AND PRINCIPE SA -SAUDI ARABIA SN -SENEGAL CS -SERBIA AND MONTENEGRO SC -SEYCHELLES SL -SIERRA LEONE SG -SINGAPORE SK -SLOVAKIA SI -SLOVENIA SB -SOLOMON ISLANDS SO -SOMALIA ZA -SOUTH AFRICA GS -SOUTH GEORGIA AND THE SOUTH SANDWICH ISLANDS ES -SPAIN LK -SRI LANKA SD -SUDAN SR -SURINAME SJ -SVALBARD AND JAN MAYEN SZ -SWAZILAND SE -SWEDEN CH -SWITZERLAND SY -SYRIAN ARAB REPUBLIC TW -TAIWAN, PROVINCE OF CHINA TJ -TAJIKISTAN TZ -TANZANIA, UNITED REPUBLIC OF TH -THAILAND TL -TIMOR-LESTE TG - TOGO TK -TOKELAU TO -TONGA TT -TRINIDAD AND TOBAGO TN -TUNISIA TR -TURKEY TM -TURKMENISTAN TC -TURKS AND CAICOS ISLANDS TV -TUVALU UG -UGANDA UA -UKRAINE AE -UNITED ARAB EMIRATES GB -UNITED KINGDOM US -UNITED STATES UM -UNITED STATES MINOR OUTLYING ISLANDS UY -URUGUAY UZ -UZBEKISTAN VU -VANUATU VE -VENEZUELA VN -VIET NAM VG -VIRGIN ISLANDS, BRITISH VI -VIRGIN ISLANDS, U.S. WF -WALLIS AND FUTUNA EH -WESTERN SAHARA YE -YEMEN ZM -ZAMBIA ZW -ZIMBABWE

Name	Country
*Base XSD Type: string	
Code Value	Description
US	
AF	
AL	
DZ	
AS	
AD	
AO	
AI	
AQ	

Get Service Processing Advisory

Code Value	Description
AG	
AR	
AM	
AW	
AU	
AT	
AZ	
BS	
BH	
BD	
BB	
BY	
BE	
BZ	
BJ	
BM	
BT	
BO	
BA	
BW	
BV	
BR	

Get Service Processing Advisory

Code Value	Description
IO	
BN	
BG	
BF	
BI	
KH	
CM	
CA	
CV	
KY	
CF	
TD	
CL	
CN	
CX	
CC	
CO	
KM	
CG	
CD	
CK	
CR	

Get Service Processing Advisory

Code Value	Description
CI	
HR	
CU	
CY	
CZ	
DK	
DJ	
DM	
DO	
EC	
EG	
SV	
GQ	
ER	
EE	
ET	
FK	
FO	
FJ	
FI	
FR	
GF	

Get Service Processing Advisory

Code Value	Description
PF	
TF	
GA	
GM	
GE	
DE	
GH	
GI	
GR	
GL	
GD	
GP	
GU	
GT	
GN	
GW	
GY	
HT	
HM	
VA	
HN	
HK	

Get Service Processing Advisory

Code Value	Description
HU	
IS	
IN	
ID	
IR	
IQ	
IE	
IL	
IT	
JM	
JP	
JO	
KZ	
KE	
KI	
KP	
KR	
KW	
KG	
LA	
LV	
LB	

Get Service Processing Advisory

Code Value	Description
LS	
LR	
LY	
LI	
LT	
LU	
MO	
MK	
MG	
MW	
MY	
MV	
ML	
MT	
MH	
MQ	
MR	
MU	
YT	
MX	
FM	
MD	

Get Service Processing Advisory

Code Value	Description
MC	
MN	
MS	
MA	
MZ	
MM	
NA	
NR	
NP	
NL	
AN	
NC	
NZ	
NI	
NE	
NG	
NU	
NF	
MP	
NO	
OM	
PK	

Get Service Processing Advisory

Code Value	Description
PW	
PS	
PA	
PG	
PY	
PE	
PH	
PN	
PL	
PT	
PR	
QA	
RE	
RO	
RU	
RW	
SH	
KN	
LC	
PM	
VC	
WS	

Get Service Processing Advisory

Code Value	Description
SM	
ST	
SA	
SN	
CS	
SC	
SL	
SG	
SK	
SI	
SB	
SO	
ZA	
GS	
ES	
LK	
SD	
SR	
SJ	
SZ	
SE	
CH	

Get Service Processing Advisory

Code Value	Description
SY	
TW	
TJ	
TZ	
TH	
TL	
TG	
TK	
TO	
TT	
TN	
TR	
TM	
TC	
TV	
UG	
UA	
AE	
GB	
UM	
UY	
UZ	

Get Service Processing Advisory

Code Value	Description
VU	
VE	
VN	
VG	
VI	
WF	
EH	
YE	
ZM	
ZW	

Currency

The ISO code identifying the type of currency in use.

Name	Currency
------	----------

*Base XSD Type: string

Code Value	Description
USD	
ADP	
AED	
AFA	
ALL	
ANG	

Get Service Processing Advisory

Code Value	Description
AOK	
ARA	
ATS	
AUD	
AWG	
BBD	
BDT	
BEF	
BGL	
BHD	
BIF	
BMD	
BND	
BOB	
BRC	
BSD	
BTN	
BUK	
BWP	
BZD	
CAD	
CHF	

Get Service Processing Advisory

Code Value	Description
CLF	
CLP	
CNY	
COP	
CRC	
CSK	
CUP	
CVE	
CYP	
DDM	
DEM	
DJF	
DKK	
DOP	
DZD	
ECS	
EGP	
ESP	
ETB	
EUR	
FIM	
FKP	

Get Service Processing Advisory

Code Value	Description
FRF	
GBP	
GHC	
GIP	
GMD	
GNF	
GRD	
GTQ	
GWP	
GYD	
HKD	
HNL	
HTG	
HUF	
IDR	
IEP	
ILS	
INR	
IQD	
IRR	
ISK	
ITL	

Get Service Processing Advisory

Code Value	Description
JMD	
JOD	
JPY	
KES	
KHR	
KMF	
KPW	
KRW	
KWD	
KYD	
LAK	
LBP	
LKR	
LRD	
LSL	
LUF	
LYD	
MAD	
MGF	
MNT	
MOP	
MRO	

Get Service Processing Advisory

Code Value	Description
MTL	
MUR	
MVR	
MWK	
MXN	
MYR	
MZM	
NGN	
NIC	
NLG	
NOK	
NPR	
NZD	
OMR	
PAB	
PEI	
PGK	
PHP	
PKR	
PLZ	
PTE	
PYG	

Get Service Processing Advisory

Code Value	Description
QAR	
ROL	
RWF	
SAR	
SBD	
SCR	
SDP	
SEK	
SGD	
SHP	
SLL	
SKK	
SOS	
SRG	
STD	
SUR	
SVC	
SYP	
SZL	
THB	
TND	
TOP	

Get Service Processing Advisory

Code Value	Description
TPE	
TRL	
TTD	
TWD	
TZS	
UGS	
UYP	
VEB	
VND	
VUV	
WST	
YDD	
YER	
YUD	
ZAR	
ZRZ	
ZWD	
Other	

Date

Date conforms to ISO 8601 format rules EX: \d\d\d\d-\d\d-\d\d

Name	Date
------	------

Get Service Processing Advisory

*Base XSD Type: date

DateTime

These field(s) use this type: CreationDateTime.

Date and time conforms to ISO 8601format rules without offset EX:2003-11-05T13:15:30Z

Name	DateTime
------	----------

*Base XSD Type: dateTime

DeductibleType

These field(s) use this type: DeductibleType.

The type of customer deductible. Eg: Service Contract

Name	DeductibleType
------	----------------

*Base XSD Type: string

DeductibleWaiverInd

These field(s) use this type: DeductibleWaiverInd.

Indicates that the dealer waived the deductible or changed the deductible from an amount greater than zero to zero.

Name	DeductibleWaiverInd
------	---------------------

*Base XSD Type: string

Code Value	Description
0	
1	

Get Service Processing Advisory

DispositionNotes

These field(s) use this type: DispositionNotes.

Notes regarding disposition of request

Name	DispositionNotes
------	------------------

*Base XSD Type: string

DispositionReasonCode

These field(s) use this type: DispositionReasonCode.

Substantiating reason for arriving at disposition

Name	DispositionReasonCode
------	-----------------------

*Base XSD Type: string

DispositionStatus

These field(s) use this type: DispositionStatus.

Disposition of request Ex: Rejected, Partial Payment, etc.)

Name	DispositionStatus
------	-------------------

*Base XSD Type: string

DocumentDateTime

These field(s) use this type: DocumentDateTime.

Is the date and time the document was last created. This is not the date and time that the BOD message instance was created.

Name	DocumentDateTime
------	------------------

*Base XSD Type: dateTime

Get Service Processing Advisory

Expression

These field(s) use this type: SelectExpression.

Name	Expression
------	------------

*Base XSD Type: string

ExpressionLanguage

Name	ExpressionLanguage
------	--------------------

*Base XSD Type: string

ExternalReferenceNumber

These field(s) use this type: ExternalReferenceNumber.

Secondary identifying scheme that is meaningful to claimant

Name	ExternalReferenceNumber
------	-------------------------

*Base XSD Type: string

Indicator

These field(s) use this type: DeliverPendingMailInd.

0 = No, 1 = Yes

Name	Indicator
------	-----------

*Base XSD Type: string

Code Value	Description
0	

Get Service Processing Advisory

Code Value	Description
1	

JobNumber

These field(s) use this type: **JobNumber**.

DMS assigned job or line identification number

Name	JobNumber
------	-----------

*Base XSD Type: string

Language

These field(s) use this type: **Language**.

Language conforms to ISO 639-2 rules. Note the format for this field is language-Country (see Country data type for the list of countries with definitions).
AA "Afar", AB "Abkhazian", AF "Afrikaans", AM "Amharic", AR "Arabic", AS "Assamese", AY "Aymara", AZ "Azerbaijani", BA "Bashkir", BE "Byelorussian", BG "Bulgarian", BH "Bihari", BI "Bislama", BN "Bengali" "Bangla", BO "Tibetan", BR "Breton", CA "Catalan", CO "Corsican", CS "Czech", CY "Welsh", DA "Danish", DE "German", DZ "Bhutani", EL "Greek", EN "English" "American", ES "Spanish", ET "Estonian", EU "Basque", FA "Persian", FI "Finnish", FJ "Fiji", FO "Faeroese", FR "French", FY "Frisian", GA "Irish", GD "Gaelic" "Scots Gaelic", GL "Galician", GN "Guarani", GU "Gujarati", HA "Hausa", HI "Hindi", HR "Croatian", HU "Hungarian", HY "Armenian", IK "Inupiak", IN "Indonesian", IS "Icelandic", IT "Italian", IW "Hebrew", JA "Japanese", JI "Yiddish", JW "Javanese", KA "Georgian", KK "Kazakh", KL "Greenlandic", KM "Cambodian", KN "Kannada", KO "Korean", KS "Kashmiri", KU "Kurdish", KY "Kirghiz", LA "Latin", LN "Lingala", LO "Laothian", LT "Lithuanian", LV "Latvian" "Lettish", MG "Malagasy", MI "Maori", MK "Macedonian", ML "Malayalam", MN "Mongolian", MO "Moldavian", MR "Marathi", MS "Malay", MT "Maltese", MY "Burmese", NA "Nauru", NE "Nepali", NL "Dutch", NO "Norwegian", OC "Occitan", OM "Oromo" "Afan", OR "Oriya", PA "Punjabi", PL "Polish", PS "Pashto" "Pushto", PT "Portuguese", QU "Quechua", RM "Rhaeto-Romance", RN "Kirundi", RO "Romanian", RU "Russian", RW "Kinyarwanda", SA "Sanskrit", SD "Sindhi", SG "Sangro", SH "Serbo-Croatian", SI "Sinhalese", SK "Slovak", SL "Slovenian", SM "Samoan", SN "Shona", SO "Somali", SQ "Albanian", SR "Serbian", SS "Siswati", ST "Sesotho", SU "Sudanese", SV "Swedish", SW "Swahili", TA "Tamil", TE "Tegulu", TG "Tajik", TH "Thai", TI "Tigrinya", TK "Turkmen", TL "Tagalog", TN "Setswana", TO "Tonga", TR "Turkish", TS "Tsonga", TT "Tatar", TW "Twi", UK "Ukrainian", UR "Urdu", UZ "Uzbek", VI "Vietnamese", WO "Wolof", XH "Xhosa", YO "Yoruba", ZH "Chinese", ZU "Zulu"

Name	Language
------	----------

*Base XSD Type: string

Get Service Processing Advisory

Code Value	Description
en-US	
en-CA	
aa-ET	
ab-GE	
af-ZA	
am- ET	
ar-SA	
as-IN	
ay-BO	
az-AZ	
ba-RU	
be-BY	
bg-BG	
bh-IN	
bi-VU	
bn-BD	
bo-BT	
br-FR	
ca-ES	
co-FR	
cs-CZ	
cy-GB	

Get Service Processing Advisory

Code Value	Description
da-DE	
de-DE	
dz-BT	
el-GR	
es-ES	
et-EE	
eu-ES	
fa-AF	
fi-FI	
fj-FJ	
fo-FO	
fr-CA	
fr-FR	
fy-NL	
ga-IE	
gd-GB	
gl-ES	
gn-PY	
gu-IN	
ha-NG	
hi-IN	
hr-HR	

Get Service Processing Advisory

Code Value	Description
hu-HU	
hy-AM	
ik-GL	
in-ID	
is-IS	
it-IT	
iw-IL	
ja-JP	
ji-IL	
jw-ID	
ka-GE	
kk-KZ	
kl-GL	
km-KH	
kn-IN	
ko-KP	
ko-KR	
ks-IN	
ku-IQ	
ky-CN	
la-VA	
ln-CD	

Get Service Processing Advisory

Code Value	Description
lo-LA	
lt-LT	
lv-LV	
mg-MG	
mi-NZ	
mk-MK	
ml-IN	
mn-MN	
mo-MO	
mr-IN	
ms-MY	
mt-MH	
my-MM	
na-NR	
ne-NP	
nl-NL	
no-NO	
oc-FR	
om- ET	
or-IN	
pa-IN	
pl-PL	

Get Service Processing Advisory

Code Value	Description
ps-PK	
pt-PT	
qu-PE	
rm-CH	
rn-BI	
ro-RO	
ru-RU	
rw-RW	
sa-IN	
sd-PK	
sg-CF	
sh-HR	
si-LK	
sk-SK	
sl-SI	
sm-WS	
sn-ZW	
so-SO	
sq-AL	
sr-CS	
ss-ZA	
st-ZA	

Get Service Processing Advisory

Code Value	Description
su-SD	
sv-SE	
sw-TL	
ta-IN	
te-IN	
tg-TJ	
th-TH	
ti-ET	
tk-TM	
tl-PH	
tn-ZA	
to-TO	
tr-TR	
ts-ZA	
tt-RU	
tw-GH	
uk-UA	
ur-PK	
uz-UZ	
vi-VN	
wo-SN	
xh-ZA	

Get Service Processing Advisory

Code Value	Description
yo-NG	
zh-CN	
zu-ZA	

Note

A free form note.

Name	Note
------	------

*Base XSD Type: string

OEMClaimNumber

These field(s) use this type: **OEMClaimNumber.**

Assigned by OEM at time of claim processing

Name	OEMClaimNumber
------	----------------

*Base XSD Type: string

PaymentCycleEndDate

These field(s) use this type: **PaymentCycleEndDate.**

Ending date of Payment Cycle

Name	PaymentCycleEndDate
------	---------------------

*Base XSD Type: date

PaymentNotes

Get Service Processing Advisory

These field(s) use this type: **PaymentNotes**.

Notes regarding payment

Name	PaymentNotes
------	--------------

*Base XSD Type: string

ProcessDate

These field(s) use this type: **ProcessDate**.

Effective date of process

Name	ProcessDate
------	-------------

*Base XSD Type: date

Reference

These field(s) use this type: **ReferenceId**.

Reference notation

Name	Reference
------	-----------

*Base XSD Type: string

ReferenceNumber

Reference number

Name	ReferenceNumber
------	-----------------

*Base XSD Type: string

RepairOrderCompletedDate

Get Service Processing Advisory

These field(s) use this type: **RepairOrderCompletedDate.**

The date the last line was closed on the repair order

Name	RepairOrderCompletedDate
-------------	---------------------------------

*Base XSD Type: date

RepairOrderOpenedDate

These field(s) use this type: **RepairOrderOpenedDate.**

System date when Repair Order was opened

Name	RepairOrderOpenedDate
-------------	------------------------------

*Base XSD Type: date

SecondaryPassword

These field(s) use this type: **SecondaryPassword.**

Secondary password used to validate access to the dealer information

Name	SecondaryPassword
-------------	--------------------------

*Base XSD Type: string

SettlementDate

These field(s) use this type: **SettlementDate.**

Date that funds are transferred

Name	SettlementDate
-------------	-----------------------

*Base XSD Type: date

Get Service Processing Advisory

SettlementType

These field(s) use this type: **SettlementType**.

Method that was used for settlement transfer of funds

Name	SettlementType
*Base XSD Type: string	
Code Value	Description
EFT	Electronic funds transfer.
Check	Indicates that a check will be used as the method of payment.
Parts Credit	Parts Credit
Other	Other

ShortMfg

These field(s) use this type: **SenderNameCode, DestinationNameCode**.

Short Manufacturer or RSP Codes

Name	ShortMfg
*Base XSD Type: string	

SystemVersion

These field(s) use this type: **SystemVersion**.

The sender's software version number .

Name	SystemVersion
*Base XSD Type: string	

Get Service Processing Advisory

TaxabilityInd

These field(s) use this type: **TaxabilityInd**.

Determines whether an item or amount is taxable.

Name	TaxabilityInd
------	---------------

*Base XSD Type: string

Code Value	Description
------------	-------------

0	
---	--

1	
---	--

TaxType

These field(s) use this type: **TaxType**.

Tax Type

Name	TaxType
------	---------

*Base XSD Type: string

Code Value	Description
------------	-------------

Total	
-------	--

Amount	
--------	--

Labor	
-------	--

Parts	
-------	--

Claim	
-------	--

Dealer	Dealer
--------	--------

Deductible	
------------	--

Prorated	
----------	--

Get Service Processing Advisory

Code Value	Description
Other	Other
Luxury	
Vehicle Inventory	
Taxes Not In Cash Price	
Document Stamp	
Sales	
Tire	
Personal Property	
Registration	
Monthly/Use	
Weight	
Adjustment	
DownPayment	
CapCostReduction	
Lieu	
CurrentYear	
N/A	Not Applicable
LocalOption	Tennessee Tax - combination of city and county.
SingleArticle	Tennessee Tax - State Tax
Gas	Gas tax levied to applicable vehicles or by state/province law. (Referred to in US as "Gas Guzzler" tax).
Total Monthly/Use	The total amount of monthly use tax for a payment on a contract.
Service Contract	Tax charged on service contracts (where applicable).

Get Service Processing Advisory

Code Value	Description
Adjusted Sales	Adjusted sales tax due to tax modifications when capitalized (i.e. NY)
Total Sales/Use	The total amount of sales/use tax for a single payment contract.
Air Conditioning Excise	Provincial tax providing for the installation or removal of freon. (Canada)
Purchase and Use	A type of tax that is assessed upon "tax free" tangible personal property purchased by a resident of the assessing state for use, storage or consumption of goods in that state (not for resale), regardless of where the purchase took place. The tax is a one time retail tax due at registration or titling of a vehicle.
County Tax	A county tax charged based on the location of the dealer and the customer. An example, The Cook County Tax.
General Excise	This is a general excise tax that a state or region could impose.
Gross Receipt	A gross receipts tax, sometimes referred to as a gross excise tax, is a tax on the total gross revenues of a company, regardless of their source.
Tax on Trade-In	Tax due on a trade-in vehicle.
Tax on Upfront Fees	Total tax due on fees paid upfront.
Tax on Acquisition Fee	Tax due on amount of acquisition fee.
Environmental Tax	Environmental Levy / Tax.
Motor Vehicle Tax	Tax paid at of registration based on the vehicle's age and MSRP.
Wheel Tax	A tax levied by cities and villages to be credited to a road fund of the city or village

TaxTypeId

These field(s) use this type: **TaxTypeId**.

CS - City, CP - County, ST - State, OT - Other, EX - Excise, VAT - Value Added Tax, PST - Provincial Sales Tax , RT - Rental, GST - Goods and Services Tax, HST - Harmonized Tax, ART - Air Tax, QST - Quebec Sales Tax, IMP - Import Tax

Name	TaxTypeId
------	-----------

Get Service Processing Advisory

*Base XSD Type: string

Code Value	Description
CS	City
CP	County
ST	State
OT	"OT" = Other
EX	Excise
VAT	Value Added
PST	Provincial Sales Tax
RT	Rental
GST	Goods and Services Tax
HST	Harmonized Tax
ART	Air Tax
QST	Quebec Sales Tax
IMP	Import Tax

Text

These field(s) use this type:

CreatorNameCode,StoreNumber,AreaNumber>Password,DestinationSoftwareCode,DestinationSoftware,StoreNumber,AreaNumber,LogicalId,Component,T

Indicates generic text type

Name	Text
------	------

*Base XSD Type: string

Get Service Processing Advisory

Type

Type

Name	Type
------	------

*Base XSD Type: string

URI

These field(s) use this type: SenderURI, DestinationURI.

URI

Name	URI
------	-----

*Base XSD Type: anyURI

VIN

These field(s) use this type: VIN.

Federally defined 17 position vehicle identification number

Name	VIN
------	-----

*Base XSD Type: string

WarrantyNotes

These field(s) use this type: WarrantyNotes.

Any Warranty related Notes

Name	WarrantyNotes
------	---------------

*Base XSD Type: string

Fields and Global Attributes

Global declarations are items such as elements, attribute groups, and group definitions. These items are not defined within any particular component. A component may reference these definitions. Within a STAR XML Schemas these are typically known as global fields.

ApplicationArea

These field(s) use this type: **ApplicationArea**.

Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.

Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.

Name	ApplicationArea
Type	ApplicationArea
Nilable	no
Abstract	no

XML Instance Representation

```
<ApplicationArea>
  <Sender> Sender </Sender> [1]
  <CreationDateTime> DateTime </CreationDateTime> [1]
  <Signature> Signature </Signature> [0..1]
  <BODId> Code </BODId> [0..1]
  <Destination> Destination </Destination> [1]
</ApplicationArea>
```

Get

These field(s) use this type: **Get**.

Get Service Processing Advisory

The Get verb is to communicate to a business software component a request for an existing piece of information to be returned. The Get may be paired with most of the nouns defined in the OAGIS specification. The response to this request is the Show verb. The behavior of a BOD with a Get verb is quite predictable across most of the nouns it may be paired with. The Get is designed to retrieve a single piece of information by using that information's primary retrieval field, or key field. The Get verb is not used to request several documents at once. The GetList verb is designed to achieve that purpose and will be covered in more detail later.

Selection Criteria: There are two types of selection capabilities for most BOD's that use the Get verb.

- 1) The first selection capability is called Field-Based Selection. Within a Get-based Business Object Document, the first Data Type that occurs in a specific BOD structure is commonly used to provide the Field-Based Selection criteria. This is always defined within the specific BOD and is commonly the required fields for that specific Data type. The Field-Based Selection enables the requester to provide a value or values (in the case of multiple required Field Identifiers), in the required fields. Then the responding component uses those values to find and return the requested information to the originating business software component.
- 2) The second type of selection capability for Get-based BODs is called Data Type Selection. Data Type selection enables the requester to identify which Data Types within the noun are requested to be returned in the response. The use of this capability is described for each corresponding Data Type for all BODs that use the Get verb. The Data Types are identified for retrieval within the Get instance of a BOD by including the name of the Data Type in the meta data but without any Field Identifiers or Segments identified within the Data Type. This will signify to the responding application that all of the data that corresponds to that Data Type is to be included in the response. If the Data Type is not requested, the Data Type identifier is not included in the Get request and this will signify to the responding component that the Data Type is not to be returned.

Name	Get
Type	Get
Nilable	no
Abstract	no

XML Instance Representation

```
<Get
confirm="ConfirmType [0..1]"
show="Always [1]">
  <ReturnCriteria> ... </ReturnCriteria> [1]
</Get>
```

GetServiceProcessingAdvisory

These field(s) use this type: GetServiceProcessingAdvisory.

Name	GetServiceProcessingAdvisory
Type	GetServiceProcessingAdvisory

Get Service Processing Advisory

Niltable	no
Abstract	no

XML Instance Representation

```
<GetServiceProcessingAdvisory  
revision="Text [0..1]"  
release="8.1-Lite [0..1]"  
environment="Text [0..1]"  
lang="Language [0..1]"  
bodVersion="Text [0..1]">  
  <ApplicationArea> ... </ApplicationArea> [1]  
  <DataArea> GetServiceProcessingAdvisoryDataArea </DataArea> [1]  
</GetServiceProcessingAdvisory>
```

Header

Name	Header
Type	ServiceProcessingAdvisoryHeader
Niltable	no
Abstract	no

XML Instance Representation

```
<Header>  
  <DocumentDateTime> DocumentDateTime </DocumentDateTime> [0..1]  
  <SecondaryPassword> SecondaryPassword </SecondaryPassword> [0..1]  
  <SecondaryDealerNumber> SecondaryDealerNumber </SecondaryDealerNumber> [0..1]  
  <DocumentId> DocumentId </DocumentId> [0..1]  
  <SettlementType> SettlementType </SettlementType> [0..1]  
  <SettlementDate> SettlementDate </SettlementDate> [0..1]  
  <PaymentCycleEndDate> PaymentCycleEndDate </PaymentCycleEndDate> [0..1]  
  <PaymentCycleId> PaymentCycleId </PaymentCycleId> [0..1]  
  <ClaimCount> ClaimCount </ClaimCount> [0..1]  
  <JobCount> JobCount </JobCount> [0..1]
```

Get Service Processing Advisory

```
<TotalAmount> TotalAmount </TotalAmount> [0..1]
<Payments> Payments </Payments> [0..*]
<Disposition> Payments </Disposition> [0..*]
</Header>
```

ServiceProcessingAdvisory

These field(s) use this type: ServiceProcessingAdvisory.

Name	ServiceProcessingAdvisory
Type	ServiceProcessingAdvisory
Nilable	no
Abstract	no

XML Instance Representation

```
<ServiceProcessingAdvisory>
  <Header> ... </Header> [1]
</ServiceProcessingAdvisory>
```

Verb

These field(s) use this type: Verb.

Name	Verb
Type	Verb
Nilable	no
Abstract	yes

XML Instance Representation

```
<Verb/>
```