



Standards for Technology in Automotive Retail

**Implementation Guidelines
Process Parts Pick ListDRAFT
Repository Version Rev4.4.4**

Table of Contents

Overview	1
Schema Field Usage	1
Business Scenario	2
Relationship Diagram	3
Schema Document Properties	4
Components and Data Types	5
AcknowledgableVerb	5
ActionExpressionCriteria	5
ActionVerb	6
Amount	7
ApplicationArea	7
BusinessObjectDocument	9
ConfirmableVerb	10
Description	11
Destination	11
DocumentId	13
HeaderBase	13
Id	14
ItemId	14
ItemIdDescription	15
LocationId	15
NonTaxableAmount	16
PartsBase	16
PartsPickList	17
PartsPickListHeaderBase	17
PartsPickListLine	18
PartsPickListLineBase	19
PartyId	19
Price	20
Process	21
ProcessPartsPickList	21
ProcessPartsPickListDataArea	22

Quantity	23
SecondaryDealerNumber	24
Sender	24
SenderBase	27
ServiceId	29
Signature	29
SupplierItemId	30
TaxableAmount	30
TotalAmount	31
TotalCost	31
UnitCost	31
UnitPrice	32
Verb	32
AcknowledgementType	33
Action	33
Code	34
ConfirmType	34
Country	34
Currency	46
DateTime	54
DocumentDateTime	54
Expression	54
ExpressionLanguage	54
Indicator	55
Language	55
Note	62
PartType	62
PriceExplanation	62
PriceType	63
Reference	64

ReferenceNumber	64
SecondaryPassword	64
ShortMfg	65
SystemVersion	65
Text	65
UOM	66
URI	67
Fields and Global Attributes	68
ApplicationArea	68
Header	68
Line	69
PartsPickList	69
Process	70
ProcessPartsPickList	71
Verb	71

Process Parts Pick List

Process Parts Pick List Guidelines

Overview

This document is a guideline on how to use the Process Parts Pick List Business Object Document (BOD). Process Parts Pick List has been defined in the context of STAR for the Automotive Retail Industry. The scope of this BOD is to define the Process Parts Pick List process for individual consumers who service their automobiles through their OEM's authorized Dealers. The focus is on Dealer and OEM interactions, not third party organizations. NOTE: Although this is the traditional use of the Process Parts Pick List, this BOD could be used to send Process Parts Pick List information between any two business parties.

Implementation Guidelines provide detailed information regarding the structure and meaning of the Process Parts Pick List BOD and corresponds directly to the Process Parts Pick List schema. In addition to structure and meaning, the Implementation Guidelines identify various business rules for specific fields/components that due to their nature, i.e. field interdependence, are not possible to express using schema. Please note that although these business rules are not included in the schema, they **MUST** be followed to be STAR Compliant. Therefore, the Process Parts Pick List Implementation Guidelines must be used in concert with the Process Parts Pick List schema during development and should **NOT** be considered a supplement or substitution to the schema. For more information regarding STAR XML Data Compliance, please review the STAR Data Compliance Guidelines document located on the STAR Web site.

For a copy of the corresponding Process Parts Pick List schema, please download the appropriate STAR schema repository from the XML portion of the STAR website (www.starstandard.org). Prior to downloading the schema, users are encouraged to download the STAR XML Reference/Implementation document also located on the XML portion of the STAR website. This document provides an overview of the STAR BOD development methodology, how to download and read STAR schema, and various frequently asked questions related to the implementation of STAR BODs.

STAR has followed the Open Application Group's Business Object Document methodology to develop the Process Parts Pick List BOD. Where possible, STAR has mapped to existing OAGI fields and components. Note however that the STAR Process Parts Pick List BOD is unique to the Retail Automotive industry and is not an extension of any existing OAGIS BODs.

For more information on the Open Applications Group's BODs and related documentation please refer to the Open Applications Group's Web site at (www.openapplications.org).

Schema Field Usage

STAR uses the same Noun in the schema for all the Noun/Verb combinations of the Process Parts Pick List except the Get verb. Please refer to each Noun/Verb combination within this document to understand the requirements for each specific BOD. Although the Noun will always have every field defined for the Noun in the schema, each Noun/Verb combination may not use all of the fields. If a field is not used by a BOD, it will be noted in the business rules.


Process Parts Pick List

Business Scenario

BUSINESS SCENARIO MISSING. Please make sure it is defined in the build script.

Relationship Diagram

The following is a representation of the Noun for this BOD. It is a high level overview provided to give an idea of the hierarchy of the Noun's components.

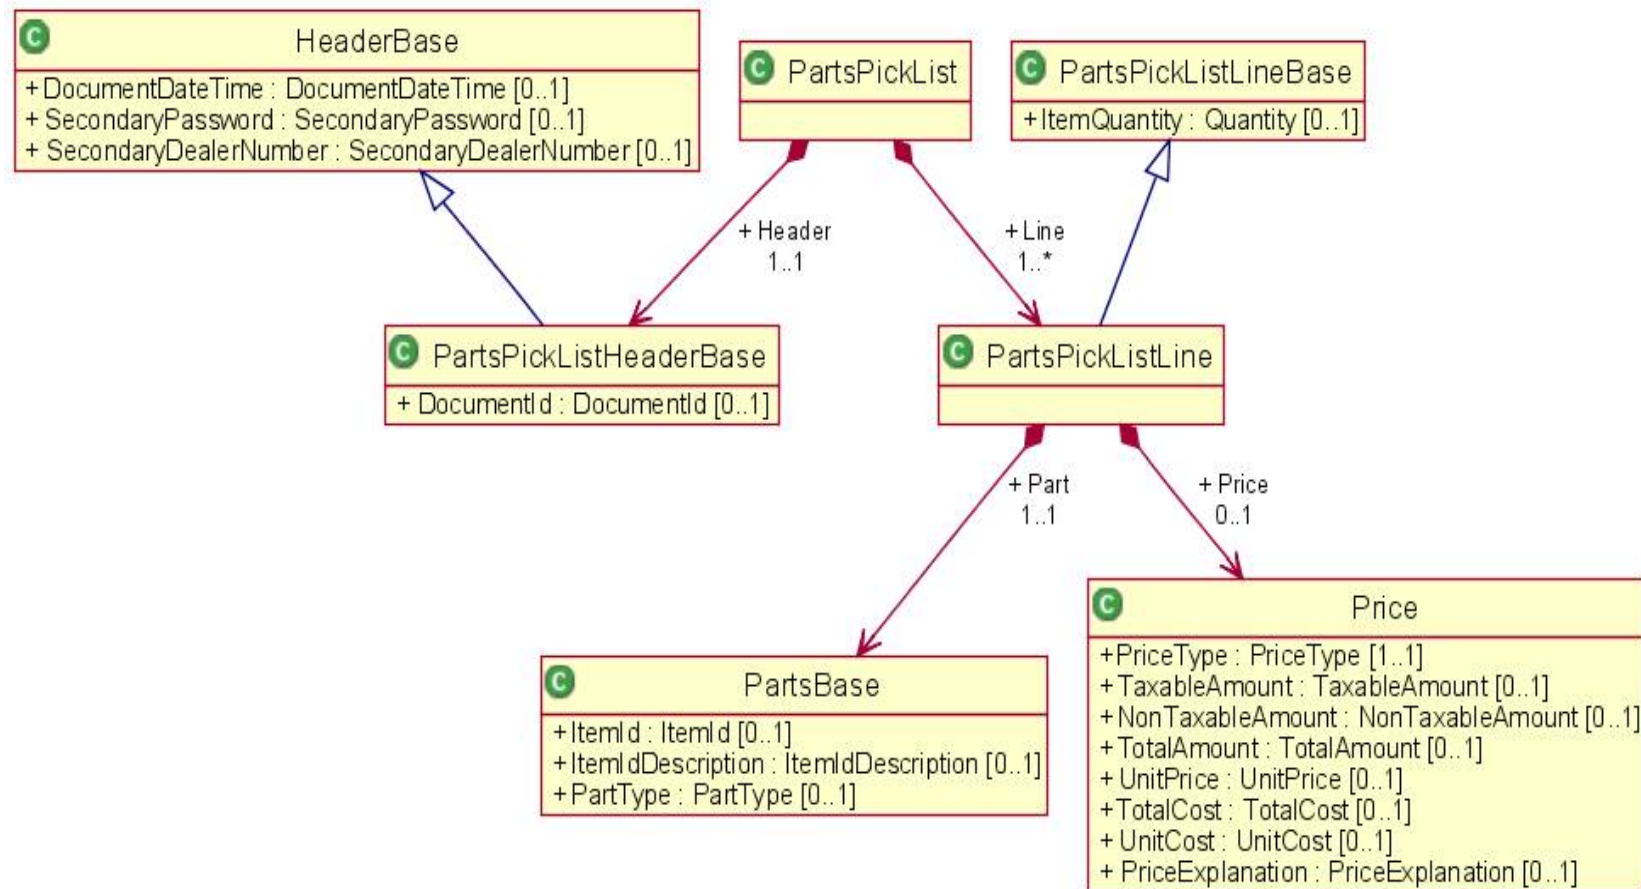

Schema Document Properties

Declared Namespaces

A schema can contain more than one namespace. According to Whatis.com, "In general, a namespace uniquely identifies a set of names so that there is no ambiguity when objects having different origins but the same names are mixed together." An example would be two namespaces that both defined an element called ID, without a namespace it would be impossible to determine which definition was being used.

Prefix	Namespace
Default namespace	http://www.starstandards.org/STAR
xml	http://www.w3.org/XML/1998/namespace
xsd	http://www.w3.org/2001/XMLSchema

Components and Data Types

Global definitions include components, code lists, and data types. Components are used to build the data structures that make up a Noun and it's requirements. Data types specify the type of data that a component's fields may contain. Not all definitions are included in this documentation. Please see either the STAR Code List guideline or Data Type Guidelines for further information.

AcknowledgableVerb

Name	AcknowledgableVerb
Abstract	yes

Attributes

Field / Component	Description	R/O	Business Rule
acknowledge		R	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Verb		R	
Criteria		O	

XML Instance Representation

```
<...  
confirm="ConfirmType [0..1]"  
acknowledge="AcknowledgementType [0..1]">  
  <Criteria> ActionExpressionCriteria </Criteria> [0..1]  
</...>
```

ActionExpressionCriteria

These field(s) use this type: **Criteria**.

Process Parts Pick List

Name	ActionExpressionCriteria
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
expressionLanguage		R	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Expression		R	

XML Instance Representation

```
<...  
expressionLanguage="ExpressionLanguage [0..1]">  
  <Expression> ... </Expression> [1..*]  
</...>
```

ActionVerb

Name	ActionVerb
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Verb		R	
Criteria		O	

XML Instance Representation

Process Parts Pick List

```
<...  
confirm="ConfirmType [0..1]">  
  <Criteria> ActionExpressionCriteria </Criteria> [0..1]  
</...>
```

Amount

Based on OAGI Amount. Simple content with the currency as an attribute

Name	Amount
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
currency		R	

XML Instance Representation

```
<...  
currency="Currency [1]">  
  xsd:decimal  
</...>
```

ApplicationArea

These field(s) use this type: **ApplicationArea**.

Name	ApplicationArea
Abstract	no

Data Elements and Components

Process Parts Pick List

Field / Component	Description	R/O	Business Rule
Sender	Identifies characteristics and control identifiers that relate to the application that created the Business Object Document. The sender area can indicate the logical location of the application and/or database server, the application, and the task that was processing to create the BOD.	R	
CreationDateTime	is the date time stamp that the given instance of the Business Object Document was created. This date must not be modified during the life of the Business Object Document.	R	DateTime fields must be formatted as XML Schema Datetimes in UTC/GMT format without offsets. Example: 2003-11-05T13:15:30Z
Signature	If the BOD is to be signed the signature element is included, otherwise it is not. Signature supports any digital signature that maybe used by an implementation of OAGIS. The qualifyingAgency identifies the agency that provided the format for the signature. This element supports any digital signature specification that is available today and in the future. This is accomplished by not actually defining the content but by allowing the implementation to specify the digital signature to be used via an external XML Schema namespace declaration. The Signature element is defined to have any content from any other namespace. This allows the user to carry a digital signature in the xml instance of a BOD. The choice of which digital signature to use is left up to the user and their integration needs.	O	Optional. "qualifyingAgency" attribute.
BODId	The BODId provides a place to carry a Globally Unique Identifier (GUID) that will make each Business Object Document instance uniquely identifiable. This is a critical success factor to enable software developers to use the Globally Unique Identifier (GUID) to build the following services or capabilities: 1. Legally binding transactions, 2. Transaction logging, 3. Exception handling, 4. Re-sending, 5. Reporting, 6. Confirmations, 7. Security.	O	
Destination	Information related to the receiver of the BOD	R	See Destination Component.

XML Instance Representation

```
<...>
  <Sender> Sender </Sender> [1]
  <CreationDateTime> DateTime </CreationDateTime> [1]
```

Process Parts Pick List

```
<Signature> Signature </Signature> [0..1]
<BODId> Code </BODId> [0..1]
<Destination> Destination </Destination> [1]
</...>
```

BusinessObjectDocument

Name	BusinessObjectDocument
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
revision	This should contain the STAR repository version in the following recommended format. 4.2.1_M20080416. Where the first part indicates the version of the STAR repository and anything after the _ indicates the Milestone build that is being used. If referring to an official published version then only the STAR Repository version is required.	O	
release	Indicates the OAGIS release that this BOD belongs.	O	
environment	Indicates whether this BOD is being sent in a "Test" or a "Production" mode. If the BOD is being sent in a test mode, it's information should not affect the business operation. However, if the BOD is sent in "Production" mode it is assumed that all test has been complete and the contents of the BOD are to affect the operation of the receiving business application(s).	O	
lang	Indicates the language that the contents of the BOD is in unless otherwise stated.	O	
bodVersion	Deprecated as of STAR 4.2.2. It is recommended to use the revision attribute to identify the repository and the noun. May be removed in a new major version of the STAR repository. Indicates the version number of the BOD.	O	

Data Elements and Components

Process Parts Pick List

Field / Component	Description	R/O	Business Rule
ApplicationArea	Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of. Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.	R	

XML Instance Representation

```
<...  
revision="Text [0..1]"  
release="8.1-Lite [0..1]"  
environment="Text [0..1]"  
lang="Language [0..1]"  
bodVersion="Text [0..1]">  
  <ApplicationArea> ... </ApplicationArea> [1]  
</...>
```

ConfirmableVerb

Name	ConfirmableVerb
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
confirm		R	

Data Elements and Components

Process Parts Pick List

Field / Component	Description	R/O	Business Rule
Verb		R	

XML Instance Representation

```
<...  
confirm="ConfirmType [0..1]"/>
```

Description

Description

Name	Description
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
language	The ISO language code that the description is written.	O	

XML Instance Representation

```
<...  
language="Language [0..1]">  
  xsd:string  
</...>
```

Destination

These field(s) use this type: **Destination.**

Name	Destination
Abstract	no

Data Elements and Components

Process Parts Pick List

Field / Component	Description	R/O	Business Rule
DestinationNameCode	Code for destination of file (i.e.Short Manufacturer or DSP code)	O	Must use a valid code from the ShortMfg/RSP list on http://www.starstandards.org
DestinationURI	Physical address of the destination	O	
DestinationSoftwareCode	Additional information about the destination application	O	
DestinationSoftware	For which software destination file is intended (may not be known).	O	
DealerNumber	Target Dealer Code receiving information	O	
StoreNumber	Dealer code store number (DMS assigned)	O	
AreaNumber	Dealer code area number (DMS vendor assigned)	O	
DealerCountry	Target Dealer country location	O	
PartyId	The Party Id field uniquely identifies the Receiver of the message. This element can be used for parties within the Automotive Community as well as external parties. Party Id is not intended as a replacement for the Dealer Number. Suggested formats for OEMs or other large institutions include: DUNs Number, ShortMfgCode + DUNs, or ShortMfgCode. The suggested format for Dealers is: ShortMfgCode+Dealer Number.	O	
LocationId	The Location Id field uniquely identifies the location of the Receiver of a O message. This Id may be aligned with a physical address or data centers. This field provides an additional level of granularity beyond the usage of the Party Id for additional routing and deliver of data.		
ServiceId	The Service Id field identifies the particular service to which a message is being sent, e.g., an inventory service.	O	

XML Instance Representation

```

<...>
  <DestinationNameCode> ShortMfg </DestinationNameCode> [0..1]
  <DestinationURI> URI </DestinationURI> [0..1]
  <DestinationSoftwareCode> Text </DestinationSoftwareCode> [0..1]
  <DestinationSoftware> Text </DestinationSoftware> [0..1]

```

Process Parts Pick List

```
<DealerNumber> PartyId </DealerNumber> [0..1]
<StoreNumber> Text </StoreNumber> [0..1]
<AreaNumber> Text </AreaNumber> [0..1]
<DealerCountry> Country </DealerCountry> [0..1]
<PartyId> PartyId </PartyId> [0..1]
<LocationId> LocationId </LocationId> [0..1]
<ServiceId> ServiceId </ServiceId> [0..1]
</...>
```

DocumentId

These field(s) use this type: **DocumentId**.

Is the identifier for the document.

Name	DocumentId
Abstract	no

XML Instance Representation

```
<...>
  Id
</...>
```

HeaderBase

Used on all STAR BODs

Name	HeaderBase
Abstract	no

Data Elements and Components

Process Parts Pick List

Field / Component	Description	R/O	Business Rule
DocumentDateTime	Is the date and time the document was last created. This is not the date and time that the BOD message instance was created.	O	Date/Time fields must be formatted as XML Schema DateTimes in UTC/GMT format without offsets. Example: 2003-11-05T13:15:30Z
SecondaryPassword	Secondary password used to validate access to the dealer information	O	
SecondaryDealerNumber	Identifies secondary dealer number if different than primary "Dealer Number"	O	

XML Instance Representation

```
<...>
  <DocumentDateTime> DocumentDateTime </DocumentDateTime> [0..1]
  <SecondaryPassword> SecondaryPassword </SecondaryPassword> [0..1]
  <SecondaryDealerNumber> SecondaryDealerNumber </SecondaryDealerNumber> [0..1]
</...>
```

Id

These field(s) use this type: **AuthorizationId**.

Party Identification number

Name	Id
Abstract	no

XML Instance Representation

```
<...>
  xsd:string
</...>
```

ItemId

These field(s) use this type: **ItemId**.

Process Parts Pick List

Item part number

Name	ItemId
Abstract	no

XML Instance Representation

```
<...>  
  Id  
</...>
```

ItemIdDescription

These field(s) use this type: ItemIdDescription.

Item part number detail description

Name	ItemIdDescription
Abstract	no

XML Instance Representation

```
<...  
  language="Language [0..1]">  
    Description  
</...>
```

LocationId

These field(s) use this type: LocationId,LocationId.

Code identifying a physical location

Name	LocationId
Abstract	no

XML Instance Representation

Process Parts Pick List

```
<...>
  Id
</...>
```

NonTaxableAmount

These field(s) use this type: **NonTaxableAmount**.

Total non-taxable price.

Name	NonTaxableAmount
Abstract	no

XML Instance Representation

```
<...
currency="Currency [1]">
  Amount
</...>
```

PartsBase

These field(s) use this type: **Part**.

Name	PartsBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ItemId	Item part number identifier	O	
ItemIdDescription	Item part number detail description	O	
PartType	Specifies whether the parts are indicated by manufacturer part code or Part Number	O	
SupplierItemId	Supplier identification of part on order.	O	

Process Parts Pick List

XML Instance Representation

```
<...>
  <ItemId> ItemId </ItemId> [0..1]
  <ItemIdDescription> ItemIdDescription </ItemIdDescription> [0..1]
  <PartType> PartType </PartType> [0..1]
  <SupplierItemId> SupplierItemId </SupplierItemId> [0..1]
</...>
```

PartsPickList

These field(s) use this type: **PartsPickList**.

STAR Version 3.0 - Draft

STAR Version 2.1, STAR approved 04/20/2005; effective date 07/04/2005

STAR Version 2.0, STAR approved 05/07/2004; effective date 07/04/2004

STAR Version 1.0, STAR approved 8/7/2002; OAGI approved 8/16/2002; effective date 1/01/2003

Name	PartsPickList
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Header	.	R	
Line	.	R	

XML Instance Representation

```
<...>
  <Header> ... </Header> [1]
  <Line> ... </Line> [1..*]
</...>
```

PartsPickListHeaderBase

Process Parts Pick List

These field(s) use this type: **Header**.

Name	PartsPickListHeaderBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
DocumentDateTime	Is the date and time the document was last created. This is not the date and time that the BOD message instance was created.	O	Date/Time fields must be formatted as XML Schema DateTimes in UTC/GMT format without offsets. Example: 2003-11-05T13:15:30Z
SecondaryPassword	Secondary password used to validate access to the dealer information	O	
SecondaryDealerNumber	Identifies secondary dealer number if different than primary "Dealer Number"	O	
DocumentId	The primary DocumentId of the document for the given content.	O	

XML Instance Representation

```
<...>
  <DocumentDateTime> DocumentDateTime </DocumentDateTime> [0..1]
  <SecondaryPassword> SecondaryPassword </SecondaryPassword> [0..1]
  <SecondaryDealerNumber> SecondaryDealerNumber </SecondaryDealerNumber> [0..1]
  <DocumentId> DocumentId </DocumentId> [0..1]
</...>
```

PartsPickListLine

These field(s) use this type: **Line**.

Name	PartsPickListLine
Abstract	no

Process Parts Pick List

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ItemQuantity	Is the Quantity to Pick.	O	
Part		R	
Price		O	

XML Instance Representation

```
<...>
  <ItemQuantity> Quantity </ItemQuantity> [0..1]
  <Part> PartsBase </Part> [1]
  <Price> Price </Price> [0..1]
</...>
```

PartsPickListLineBase

Name	PartsPickListLineBase
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ItemQuantity	Is the Quantity to Pick.	O	

XML Instance Representation

```
<...>
  <ItemQuantity> Quantity </ItemQuantity> [0..1]
</...>
```

PartyId

These field(s) use this type: DealerNumber,PartyId,DealerNumber,PartyId.

Process Parts Pick List

Party Identification Number

Name	PartyId
Abstract	no

XML Instance Representation

```
<...>  
  Id  
</...>
```

Price

These field(s) use this type: Price.

Name	Price
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
PriceType	Identifies the price type	R	
TaxableAmount	Total Taxable Price	O	
NonTaxableAmount	Total non-taxable price.	O	
TotalAmount	Total price (cost + markup)	O	
UnitPrice	UnitPrice	O	
TotalCost	Value at unit cost times quantity	O	
UnitCost	Cost at inventory value	O	
PriceExplanation	Explanatory Note for Pricing	O	

XML Instance Representation

Process Parts Pick List

```
<...>
  <PriceType> PriceType </PriceType> [1]
  <TaxableAmount> TaxableAmount </TaxableAmount> [0..1]
  <NonTaxableAmount> NonTaxableAmount </NonTaxableAmount> [0..1]
  <TotalAmount> TotalAmount </TotalAmount> [0..1]
  <UnitPrice> UnitPrice </UnitPrice> [0..1]
  <TotalCost> TotalCost </TotalCost> [0..1]
  <UnitCost> UnitCost </UnitCost> [0..1]
  <PriceExplanation> PriceExplanation </PriceExplanation> [0..1]
</...>
```

Process

These field(s) use this type: **Process**.

Name	Process
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Verb		R	
Criteria		O	

XML Instance Representation

```
<...
confirm="ConfirmType [0..1]"
acknowledge="AcknowledgementType [0..1]">
  <Criteria> ActionExpressionCriteria </Criteria> [0..1]
</...>
```

ProcessPartsPickList

These field(s) use this type: **ProcessPartsPickList**.

Process Parts Pick List

Name	ProcessPartsPickList
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
ApplicationArea	Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of. Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.	R	
DataArea		R	

XML Instance Representation

```
<...  
revision="Text [0..1]"  
release="8.1-Lite [0..1]"  
environment="Text [0..1]"  
lang="Language [0..1]"  
bodVersion="Text [0..1]">  
  <ApplicationArea> ... </ApplicationArea> [1]  
  <DataArea> ProcessPartsPickListDataArea </DataArea> [1]  
</...>
```

ProcessPartsPickListDataArea

These field(s) use this type: **DataArea**.

Name	ProcessPartsPickListDataArea
------	------------------------------

Process Parts Pick List

Abstract no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
Process	The Process verb is used to request processing of the associated noun by the receiving application or business to party. In a typical external exchange scenario a Process BOD is considered to be a legally binding message. For example, if a customer sends a ProcessPurchaseOrder BOD to a supplier and the supplier acknowledges with a positive AcknowledgePurchaseOrder, then the customer is obligated to fulfill the agreement, unless of course other BODs are allowed to cancel or change the original order.	R	
PartsPickList	..	R	

XML Instance Representation

```
<...>
  <Process> ... </Process> [1]
  <PartsPickList> ... </PartsPickList> [1..*]
</...>
```

Quantity

These field(s) use this type: **ItemQuantity**.

A decimal value with uom

Name Quantity
Abstract no

Attributes

Field / Component	Description	R/O	Business Rule
uom		R	

Process Parts Pick List

XML Instance Representation

```
<...  
uom="UOM [1]">  
  xsd:decimal  
</...>
```

SecondaryDealerNumber

These field(s) use this type: **SecondaryDealerNumber**.

Identifies secondary dealer number if different than primary "Dealer Number"

Name	SecondaryDealerNumber
Abstract	no

XML Instance Representation

```
<...>  
  Id  
</...>
```

Sender

These field(s) use this type: **Sender**.

Name	Sender
Abstract	no

Data Elements and Components

Process Parts Pick List

Field / Component	Description	R/O	Business Rule
LogicalId	Provides the logical location of the server and applications from which the Business Object Document originated. It can be used to establish a logical to physical mapping, however its use is optional. Each system or combination of systems should maintain an external central reference table containing the logical names or logical addresses of the application systems in the integration configuration. This enables the logical names to be mapped to the physical network addresses of the resources needed on the network. Note: The technical implementation of this Domain Naming Service is not dictated by this specification. This logical to physical mapping may be done at execution time by the application itself or by a middleware transport mechanism, depending on the integration architecture used. This provides for a simple but effective directory access capability while maintaining application independence from the physical location of those resources on the network	O	
Component	Provides a finer level of control than Logical Identifier and represents the business application that issued the Business Object Document. Its use is optional. For STAR's use this is the DCS Software code name		
Task	Describes the business event that initiated the need for the Business Object Document to be created. For STAR, the task is defined in the Implementation Guidelines for each BOD. It is usually a short description of the BOD. Ex: SalesLead, CreditDecision, etc.	R	
ReferenceId	Enables the sending application to indicate the instance identifier of the event or task that caused the BOD to be created. This is used to correlate a response BOD to an originating BOD	O	
AuthorizationId	Identifies the authorization level of the user or application that is sending the Business Object Document Message. This authorization level being recognized by the receiving system indicates what can be done on the receiving system. For STAR, this is the User ID.	O	
CreatorNameCode	DCS Software Creator Code	R	
SenderNameCode	Additional information about the sending platform (i.e., Short MFG or DSP code).	R	Must use a valid code from the ShortMfg/RSP list on http://www.starstandards.org
SenderURI	Physical address of the sender	O	

Process Parts Pick List

Field / Component	Description	R/O	Business Rule
DealerNumber	Dealer Code of source of information	O	Dealer Number is Required if originating from DMS.
StoreNumber	Dealer code store number (DMS assigned)	O	
AreaNumber	Dealer code area number (DMS vendor assigned)	O	
DealerCountry	Source Dealer country location	O	Reference Country enumerator.
Language	This code is used to define the language of the data used in this transaction	O	Reference Language enumerator.
DeliverPendingMailInd	Indicates if the user requests to receive pending mail that has been stored O and has yet not been delivered yet. By selecting 0, the user will only receive the response for the current transaction the user is performing.	O	1 - Receive Pending Mail. 0 - Do not receive pending mail.
Password	Token for application specific authentication. Used to authenticate dealership/users through application specific security	O	
SystemVersion	The sender's software version number.	O	
PartyId	The Party Id field uniquely identifies the Sender of the message. This element can be used for parties within the Automotive Community as well as external parties. Party Id is not intended as a replacement for the Dealer Number. Suggested formats for OEMs or other large institutions include: DUNs Number, ShortMfgCode + DUNs, or ShortMfgCode. The suggested format for Dealers is: ShortMfgCode+Dealer Number.	O	
LocationId	The Location Id field uniquely identifies the location of the Sender of a message. This Id may be aligned with a physical address or data centers. This field provides an additional level of granularity beyond the usage of the Party Id for additional routing and deliver of data.	O	
ServiceId	The Service Id field identifies the particular service from which a message is being sent, e.g., an inventory service.	O	

XML Instance Representation

```
<...>
  <LogicalId> Text </LogicalId> [0..1]
```


Process Parts Pick List

```
<Component> Text </Component> [1]
<Task> Text </Task> [1]
<ReferenceId> Reference </ReferenceId> [0..1]
<AuthorizationId> Id </AuthorizationId> [0..1]
<CreatorNameCode> Text </CreatorNameCode> [1]
<SenderNameCode> ShortMfg </SenderNameCode> [1]
<SenderURI> URI </SenderURI> [0..1]
<DealerNumber> PartyId </DealerNumber> [0..1]
<StoreNumber> Text </StoreNumber> [0..1]
<AreaNumber> Text </AreaNumber> [0..1]
<DealerCountry> Country </DealerCountry> [0..1]
<Language> Language </Language> [0..1]
<DeliverPendingMailInd> Indicator </DeliverPendingMailInd> [0..1]
<Password> Text </Password> [0..1]
<SystemVersion> SystemVersion </SystemVersion> [0..1]
<PartyId> PartyId </PartyId> [0..1]
<LocationId> LocationId </LocationId> [0..1]
<ServiceId> ServiceId </ServiceId> [0..1]
</...>
```

SenderBase

Name	SenderBase
Abstract	no

Data Elements and Components

Process Parts Pick List

Field / Component	Description	R/O	Business Rule
LogicalId	Provides the logical location of the server and applications from which the Business Object Document originated. It can be used to establish a logical to physical mapping, however its use is optional. Each system or combination of systems should maintain an external central reference table containing the logical names or logical addresses of the application systems in the integration configuration. This enables the logical names to be mapped to the physical network addresses of the resources needed on the network. Note: The technical implementation of this Domain Naming Service is not dictated by this specification. This logical to physical mapping may be done at execution time by the application itself or by a middleware transport mechanism, depending on the integration architecture used. This provides for a simple but effective directory access capability while maintaining application independence from the physical location of those resources on the network	O	
Component	Provides a finer level of control than Logical Identifier and represents the business application that issued the Business Object Document. Its use is optional. For STAR's use this is the DCS Software code name		
Task	Describes the business event that initiated the need for the Business Object Document to be created. For STAR, the task is defined in the Implementation Guidelines for each BOD. It is usually a short description of the BOD. Ex: SalesLead, CreditDecision, etc.	R	
ReferenceId	Enables the sending application to indicate the instance identifier of the event or task that caused the BOD to be created. This is used to correlate a response BOD to an originating BOD	O	
AuthorizationId	Identifies the authorization level of the user or application that is sending the Business Object Document Message. This authorization level being recognized by the receiving system indicates what can be done on the receiving system. For STAR, this is the User ID.	O	

XML Instance Representation

```
<...>
  <LogicalId> Text </LogicalId> [0..1]
  <Component> Text </Component> [1]
  <Task> Text </Task> [1]
```

Process Parts Pick List

```
<ReferenceId> Reference </ReferenceId> [0..1]
<AuthorizationId> Id </AuthorizationId> [0..1]
</...>
```

ServiceId

These field(s) use this type: **ServiceId,ServiceId.**

The Service Id field identifies the particular service to or from which a message is being sent, e.g., an inventory service.

Name	ServiceId
Abstract	no

XML Instance Representation

```
<...>
  Id
</...>
```

Signature

These field(s) use this type: **Signature.**

Name	Signature
Abstract	no

Attributes

Field / Component	Description	R/O	Business Rule
qualifyingAgency		O	

Data Elements and Components

Field / Component	Description	R/O	Business Rule
-------------------	-------------	-----	---------------

Process Parts Pick List

XML Instance Representation

```
<...  
qualifyingAgency="Text [0..1]">  
Allow any elements from any namespace (strict validation). [0..1]  
</...>
```

SupplierItemId

These field(s) use this type: **SupplierItemId**.

Supplier identification of part on order.

Name	SupplierItemId
Abstract	no

XML Instance Representation

```
<...>  
  ItemId  
</...>
```

TaxableAmount

These field(s) use this type: **TaxableAmount**.

Total Taxable Price

Name	TaxableAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

Process Parts Pick List

TotalAmount

These field(s) use this type: **TotalAmount**.

Total price (cost + markup)

Name	TotalAmount
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

TotalCost

These field(s) use this type: **TotalCost**.

Value at unit cost times quantity

Name	TotalCost
Abstract	no

XML Instance Representation

```
<...  
currency="Currency [1]">  
  Amount  
</...>
```

UnitCost

These field(s) use this type: **UnitCost**.

Cost at inventory value

Name	UnitCost
-------------	-----------------

Process Parts Pick List

Abstract	no
-----------------	----

XML Instance Representation

```
<...  
  currency="Currency [1]">  
    Amount  
</...>
```

UnitPrice

These field(s) use this type: UnitPrice.

UnitPrice

Name	UnitPrice
Abstract	no

XML Instance Representation

```
<...  
  currency="Currency [1]">  
    Amount  
</...>
```

Verb

These field(s) use this type: Verb.

Name	Verb
Abstract	no

Data Elements and Components

Field / Component	Description	R/O	Business Rule
-------------------	-------------	-----	---------------

Process Parts Pick List

XML Instance Representation

```
<.../>
```

AcknowledgementType

Name	AcknowledgementType
------	---------------------

*Base XSD Type: NMTOKEN

Code Value	Description
Always	
OnChange	
Never	

Action

Name	Action
------	--------

*Base XSD Type: string

Code Value	Description
Add	
Delete	
Change	
Replace	
A	
D	
C	
R	

Process Parts Pick List

Code

These field(s) use this type: **BODId**.

Unique code name

Name	Code
------	------

*Base XSD Type: string

ConfirmType

Name	ConfirmType
------	-------------

*Base XSD Type: NMTOKEN

Code Value	Description
Always	
OnChange	
Never	

Country

These field(s) use this type: **DealerCountry,DealerCountry**.

Country in which the Address is in. Conforms to ISO 3166-2. AF -AFGHANISTAN AL -ALBANIA DZ -ALGERIA AS -AMERICAN SAMOA AD -ANDORRA AO -ANGOLA AI -ANGUILLA AQ -ANTARCTICA AG -ANTIGUA AND BARBUDA AR -ARGENTINA AM -ARMENIA AW -ARUBA AU -AUSTRALIA AT -AUSTRIA AZ -AZERBAIJAN BS -BAHAMAS BH -BAHRAIN BD -BANGLADESH BB -BARBADOS BY -BELARUS BE -BELGIUM BZ -BELIZE BJ -BENIN BM -BERMUDA BT -BHUTAN BO -BOLIVIA BA -BOSNIA AND HERZEGOVINA BW -BOTSWANA BV -BOUVET ISLAND BR -BRAZIL IO-BRITISH INDIAN OCEAN TERRITORY BN -BRUNEI DARUSSALAM BG -BULGARIA BF -BURKINA FASO BI -BURUNDI KH -CAMBODIA CM -CAMEROON CA -CANADA CV -CAPE VERDE KY -CAYMAN ISLANDS CF -CENTRAL AFRICAN REPUBLIC TD -CHAD CL -CHILE CN -CHINA CX -CHRISTMAS ISLAND CC -COCOS (KEELING) ISLANDS CO -COLOMBIA KM -COMOROS CG -CONGO CD -CONGO, THE DEMOCRATIC REPUBLIC OF THE CK -COOK ISLANDS CR -COSTA RICA CI -CÔTE D'IVOIRE HR -CROATIA CU -CUBA CY -CYPRUS CZ -CZECH REPUBLIC DK -DENMARK DJ -DJIBOUTI DM -DOMINICA DO -DOMINICAN REPUBLIC EC -ECUADOR EG -EGYPT SV -EL SALVADOR GQ -EQUATORIAL GUINEA ER -ERITREA EE -ESTONIA ET

Process Parts Pick List

-ETHIOPIA FK -FALKLAND ISLANDS (MALVINAS) FO -FAROE ISLANDS FJ -FIJI FI -FINLAND FR -FRANCE GF -FRENCH GUIANA PF
 -FRENCH POLYNESIA TF -FRENCH SOUTHERN TERRITORIES GA -GABON GM -GAMBIA GE -GEORGIA DE -GERMANY GH -GHANA GI
 -GIBRALTAR GR -GREECE GL -GREENLAND GD -GRENADA GP -GUADELOUPE GU -GUAM GT -GUATEMALA GN -GUINEA GW
 -GUINEA-BISSAU GY -GUYANA HT -HAITI HM -HEARD ISLAND AND MCDONALD ISLANDS VA -HOLY SEE (VATICAN CITY STATE)
 HN -HONDURAS HK -HONG KONG HU -HUNGARY IS -ICELAND IN -INDIA ID -INDONESIA IR -IRAN, ISLAMIC REPUBLIC OF IQ -IRAQ
 IE -IRELAND IL -ISRAEL IT -ITALY JM -JAMAICA JP -JAPAN JO -JORDAN KZ -KAZAKHSTAN KE -KENYA KI -KIRIBATI KP -KOREA,
 DEMOCRATIC PEOPLE'S REPUBLIC OF KR -KOREA, REPUBLIC OF KW -KUWAIT KG -KYRGYZSTAN LA -LAO PEOPLE'S DEMOCRATIC
 REPUBLIC LV -LATVIA LB -LEBANON LS -LESOTHO LR -LIBERIA LY -LIBYAN ARAB JAMAHIRIYA LI -LIECHTENSTEIN LT
 -LITHUANIA LU -LUXEMBOURG MO -MACAO MK -MACEDONIA, THE FORMER YUGOSLAV REPUBLIC OF MG -MADAGASCAR MW
 -MALAWI MY -MALAYSIA MV -MALDIVES ML -MALI MT -MALTA MH -MARSHALL ISLANDS MQ -MARTINIQUE MR -MAURITANIA
 MU -MAURITIUS YT -MAYOTTE MX -MEXICO FM -MICRONESIA, FEDERATED STATES OF MD -MOLDOVA, REPUBLIC OF MC
 -MONACO MN -MONGOLIA MS -MONTSERRAT MA -MOROCCO MZ -MOZAMBIQUE MM -MYANMAR NA -NAMIBIA NR -NAURU NP
 -NEPAL NL -NETHERLANDS AN -NETHERLANDS ANTILLES NC -NEW CALEDONIA NZ -NEW ZEALAND NI -NICARAGUA NE -NIGER
 NG -NIGERIA NU -NIUE NF -NORFOLK ISLAND MP -NORTHERN MARIANA ISLANDS NO -NORWAY OM -OMAN PK -PAKISTAN PW
 -PALAU PS -PALESTINIAN TERRITORY, OCCUPIED PA -PANAMA PG -PAPUA NEW GUINEA PY -PARAGUAY PE -PERU PH -PHILIPPINES
 PN -PITCAIRN PL -POLAND PT -PORTUGAL PR -PUERTO RICO QA -QATAR RE -RÅ#Å#UNION RO -ROMANIA RU -RUSSIAN
 FEDERATION RW -RWANDA SH -SAINT HELENA KN -SAINT KITTS AND NEVIS LC -SAINT LUCIA PM -SAINT PIERRE AND MIQUELON
 VC -SAINT VINCENT AND THE GRENADINES WS -SAMOA SM -SAN MARINO ST -SAO TOME AND PRINCIPE SA -SAUDI ARABIA SN
 -SENEGAL CS -SERBIA AND MONTENEGRO SC -SEYCHELLES SL -SIERRA LEONE SG -SINGAPORE SK -SLOVAKIA SI -SLOVENIA SB
 -SOLOMON ISLANDS SO -SOMALIA ZA -SOUTH AFRICA GS -SOUTH GEORGIA AND THE SOUTH SANDWICH ISLANDS ES -SPAIN LK
 -SRI LANKA SD -SUDAN SR -SURINAME SJ -SVALBARD AND JAN MAYEN SZ -SWAZILAND SE -SWEDEN CH -SWITZERLAND SY
 -SYRIAN ARAB REPUBLIC TW -TAIWAN, PROVINCE OF CHINA TJ -TAJIKISTAN TZ -TANZANIA, UNITED REPUBLIC OF TH -THAILAND
 TL -TIMOR-LESTE TG - TOGO TK -TOKELAU TO -TONGA TT -TRINIDAD AND TOBAGO TN -TUNISIA TR -TURKEY TM
 -TURKMENISTAN TC -TURKS AND CAICOS ISLANDS TV -TUVALU UG -UGANDA UA -UKRAINE AE -UNITED ARAB EMIRATES GB
 -UNITED KINGDOM US -UNITED STATES UM -UNITED STATES MINOR OUTLYING ISLANDS UY -URUGUAY UZ -UZBEKISTAN VU
 -VANUATU VE -VENEZUELA VN -VIET NAM VG -VIRGIN ISLANDS, BRITISH VI -VIRGIN ISLANDS, U.S. WF -WALLIS AND FUTUNA EH
 -WESTERN SAHARA YE -YEMEN ZM -ZAMBIA ZW -ZIMBABWE

Name	Country
*Base XSD Type: string	
Code Value	Description
US	
AF	
AL	

Process Parts Pick List

Code Value	Description
DZ	
AS	
AD	
AO	
AI	
AQ	
AG	
AR	
AM	
AW	
AU	
AT	
AZ	
BS	
BH	
BD	
BB	
BY	
BE	
BZ	
BJ	
BM	

Process Parts Pick List

Code Value	Description
BT	
BO	
BA	
BW	
BV	
BR	
IO	
BN	
BG	
BF	
BI	
KH	
CM	
CA	
CV	
KY	
CF	
TD	
CL	
CN	
CX	
CC	

Process Parts Pick List

Code Value	Description
CO	
KM	
CG	
CD	
CK	
CR	
CI	
HR	
CU	
CY	
CZ	
DK	
DJ	
DM	
DO	
EC	
EG	
SV	
GQ	
ER	
EE	
ET	

Process Parts Pick List

Code Value	Description
FK	
FO	
FJ	
FI	
FR	
GF	
PF	
TF	
GA	
GM	
GE	
DE	
GH	
GI	
GR	
GL	
GD	
GP	
GU	
GT	
GN	
GW	

Process Parts Pick List

Code Value	Description
GY	
HT	
HM	
VA	
HN	
HK	
HU	
IS	
IN	
ID	
IR	
IQ	
IE	
IL	
IT	
JM	
JP	
JO	
KZ	
KE	
KI	
KP	

Process Parts Pick List

Code Value	Description
KR	
KW	
KG	
LA	
LV	
LB	
LS	
LR	
LY	
LI	
LT	
LU	
MO	
MK	
MG	
MW	
MY	
MV	
ML	
MT	
MH	
MQ	

Process Parts Pick List

Code Value	Description
MR	
MU	
YT	
MX	
FM	
MD	
MC	
MN	
MS	
MA	
MZ	
MM	
NA	
NR	
NP	
NL	
AN	
NC	
NZ	
NI	
NE	
NG	

Process Parts Pick List

Code Value	Description
NU	
NF	
MP	
NO	
OM	
PK	
PW	
PS	
PA	
PG	
PY	
PE	
PH	
PN	
PL	
PT	
PR	
QA	
RE	
RO	
RU	
RW	

Process Parts Pick List

Code Value	Description
SH	
KN	
LC	
PM	
VC	
WS	
SM	
ST	
SA	
SN	
CS	
SC	
SL	
SG	
SK	
SI	
SB	
SO	
ZA	
GS	
ES	
LK	

Process Parts Pick List

Code Value	Description
SD	
SR	
SJ	
SZ	
SE	
CH	
SY	
TW	
TJ	
TZ	
TH	
TL	
TG	
TK	
TO	
TT	
TN	
TR	
TM	
TC	
TV	
UG	

Process Parts Pick List

Code Value	Description
UA	
AE	
GB	
UM	
UY	
UZ	
VU	
VE	
VN	
VG	
VI	
WF	
EH	
YE	
ZM	
ZW	

Currency

The ISO code identifying the type of currency in use.

Name	Currency
------	----------

Base XSD Type: string

Process Parts Pick List

Code Value	Description
USD	
ADP	
AED	
AFA	
ALL	
ANG	
AOK	
ARA	
ATS	
AUD	
AWG	
BBD	
BDT	
BEF	
BGL	
BHD	
BIF	
BMD	
BND	
BOB	
BRC	
BSD	

Process Parts Pick List

Code Value	Description
BTN	
BUK	
BWP	
BZD	
CAD	
CHF	
CLF	
CLP	
CNY	
COP	
CRC	
CSK	
CUP	
CVE	
CYP	
DDM	
DEM	
DJF	
DKK	
DOP	
DZD	
ECS	

Process Parts Pick List

Code Value	Description
EGP	
ESP	
ETB	
EUR	
FIM	
FKP	
FRF	
GBP	
GHC	
GIP	
GMD	
GNF	
GRD	
GTQ	
GWP	
GYD	
HKD	
HNL	
HTG	
HUF	
IDR	
IEP	

Process Parts Pick List

Code Value	Description
ILS	
INR	
IQD	
IRR	
ISK	
ITL	
JMD	
JOD	
JPY	
KES	
KHR	
KMF	
KPW	
KRW	
KWD	
KYD	
LAK	
LBP	
LKR	
LRD	
LSL	
LUF	

Process Parts Pick List

Code Value	Description
LYD	
MAD	
MGF	
MNT	
MOP	
MRO	
MTL	
MUR	
MVR	
MWK	
MXN	
MYR	
MZM	
NGN	
NIC	
NLG	
NOK	
NPR	
NZD	
OMR	
PAB	
PEI	

Process Parts Pick List

Code Value	Description
PGK	
PHP	
PKR	
PLZ	
PTE	
PYG	
QAR	
ROL	
RWF	
SAR	
SBD	
SCR	
SDP	
SEK	
SGD	
SHP	
SLL	
SKK	
SOS	
SRG	
STD	
SUR	

Process Parts Pick List

Code Value	Description
SVC	
SYP	
SZL	
THB	
TND	
TOP	
TPE	
TRL	
TTD	
TWD	
TZS	
UGS	
UYP	
VEB	
VND	
VUV	
WST	
YDD	
YER	
YUD	
ZAR	
ZRZ	

Process Parts Pick List

Code Value	Description
ZWD	
Other	

DateTime

These field(s) use this type: CreationDateTime.

Date and time conforms to ISO 8601 format rules without offset EX:2003-11-05T13:15:30Z

Name	DateTime
------	----------

*Base XSD Type: dateTime

DocumentDateTime

These field(s) use this type: DocumentDateTime.

Is the date and time the document was last created. This is not the date and time that the BOD message instance was created.

Name	DocumentDateTime
------	------------------

*Base XSD Type: dateTime

Expression

Name	Expression
------	------------

*Base XSD Type: string

ExpressionLanguage

Name	ExpressionLanguage
------	--------------------

Process Parts Pick List

*Base XSD Type: string

Indicator

These field(s) use this type: **DeliverPendingMailInd.**

0 = No, 1 = Yes

Name	Indicator
*Base XSD Type: string	
Code Value	Description
0	
1	

Language

These field(s) use this type: **Language.**

Language conforms to ISO 639-2 rules. Note the format for this field is language-Country (see Country data type for the list of countries with definitions).
AA "Afar", AB "Abkhazian", AF "Afrikaans", AM "Amharic", AR "Arabic", AS "Assamese", AY "Aymara", AZ "Azerbaijani", BA "Bashkir", BE "Byelorussian", BG "Bulgarian", BH "Bihari", BI "Bislama", BN "Bengali" "Bangla", BO "Tibetan", BR "Breton", CA "Catalan", CO "Corsican", CS "Czech", CY "Welsh", DA "Danish", DE "German", DZ "Bhutani", EL "Greek", EN "English" "American", ES "Spanish", ET "Estonian", EU "Basque", FA "Persian", FI "Finnish", FJ "Fiji", FO "Faeroese", FR "French", FY "Frisian", GA "Irish", GD "Gaelic" "Scots Gaelic", GL "Galician", GN "Guarani", GU "Gujarati", HA "Hausa", HI "Hindi", HR "Croatian", HU "Hungarian", HY "Armenian", IK "Inupiak", IN "Indonesian", IS "Icelandic", IT "Italian", IW "Hebrew", JA "Japanese", JI "Yiddish", JW "Javanese", KA "Georgian", KK "Kazakh", KL "Greenlandic", KM "Cambodian", KN "Kannada", KO "Korean", KS "Kashmiri", KU "Kurdish", KY "Kirghiz", LA "Latin", LN "Lingala", LO "Laothian", LT "Lithuanian", LV "Latvian" "Lettish", MG "Malagasy", MI "Maori", MK "Macedonian", ML "Malayalam", MN "Mongolian", MO "Moldavian", MR "Marathi", MS "Malay", MT "Maltese", MY "Burmese", NA "Nauru", NE "Nepali", NL "Dutch", NO "Norwegian", OC "Occitan", OM "Oromo" "Afan", OR "Oriya", PA "Punjabi", PL "Polish", PS "Pashto" "Pushto", PT "Portuguese", QU "Quechua", RM "Rhaeto-Romance", RN "Kirundi", RO "Romanian", RU "Russian", RW "Kinyarwanda", SA "Sanskrit", SD "Sindhi", SG "Sangro", SH "Serbo-Croatian", SI "Singhalese", SK "Slovak", SL "Slovenian", SM "Samoan", SN "Shona", SO "Somali", SQ "Albanian", SR "Serbian", SS "Siswati", ST "Sesotho", SU "Sudanese", SV "Swedish", SW "Swahili", TA "Tamil", TE "Tegulu", TG "Tajik", TH "Thai", TI "Tigrinya", TK "Turkmen", TL "Tagalog", TN "Setswana", TO "Tonga", TR "Turkish", TS "Tsonga", TT "Tatar", TW "Twi", UK "Ukrainian", UR "Urdu", UZ "Uzbek", VI "Vietnamese", WO "Wolof", XH "Xhosa", YO "Yoruba", ZH "Chinese", ZU "Zulu"

Process Parts Pick List

Name	Language
*Base XSD Type: string	
Code Value	Description
en-US	
en-CA	
aa-ET	
ab-GE	
af-ZA	
am- ET	
ar-SA	
as-IN	
ay-BO	
az-AZ	
ba-RU	
be-BY	
bg-BG	
bh-IN	
bi-VU	
bn-BD	
bo-BT	
br-FR	
ca-ES	
co-FR	

Process Parts Pick List

Code Value	Description
cs-CZ	
cy-GB	
da-DE	
de-DE	
dz-BT	
el-GR	
es-ES	
et-EE	
eu-ES	
fa-AF	
fi-FI	
fj-FJ	
fo-FO	
fr-CA	
fr-FR	
fy-NL	
ga-IE	
gd-GB	
gl-ES	
gn-PY	
gu-IN	
ha-NG	

Process Parts Pick List

Code Value	Description
hi-IN	
hr-HR	
hu-HU	
hy-AM	
ik-GL	
in-ID	
is-IS	
it-IT	
iw-IL	
ja-JP	
ji-IL	
jw-ID	
ka-GE	
kk-KZ	
kl-GL	
km-KH	
kn-IN	
ko-KP	
ko-KR	
ks-IN	
ku-IQ	
ky-CN	

Process Parts Pick List

Code Value	Description
la-VA	
ln-CD	
lo-LA	
lt-LT	
lv-LV	
mg-MG	
mi-NZ	
mk-MK	
ml-IN	
mn-MN	
mo-MO	
mr-IN	
ms-MY	
mt-MH	
my-MM	
na-NR	
ne-NP	
nl-NL	
no-NO	
oc-FR	
om- ET	
or-IN	

Process Parts Pick List

Code Value	Description
pa-IN	
pl-PL	
ps-PK	
pt-PT	
qu-PE	
rm-CH	
rn-BI	
ro-RO	
ru-RU	
rw-RW	
sa-IN	
sd-PK	
sg-CF	
sh-HR	
si-LK	
sk-SK	
sl-SI	
sm-WS	
sn-ZW	
so-SO	
sq-AL	
sr-CS	

Process Parts Pick List

Code Value	Description
ss-ZA	
st-ZA	
su-SD	
sv-SE	
sw-TL	
ta-IN	
te-IN	
tg-TJ	
th-TH	
ti-ET	
tk-TM	
tl-PH	
tn-ZA	
to-TO	
tr-TR	
ts-ZA	
tt-RU	
tw-GH	
uk-UA	
ur-PK	
uz-UZ	
vi-VN	

Process Parts Pick List

Code Value	Description
wo-SN	
xh-ZA	
yo-NG	
zh-CN	
zu-ZA	

Note

A free form note.

Name	Note
------	------

*Base XSD Type: string

PartType

These field(s) use this type: **PartType**.

Specifies whether the parts are indicated by manufacturer part code or Part Number - H = Manufacturer Part Code, P = Part Number

Name	PartType
------	----------

*Base XSD Type: string

Code Value	Description
H	Manufacturer Part Code
P	"P" = Pending

PriceExplanation

Process Parts Pick List

These field(s) use this type: **PriceExplanation**.

Explanatory Note for Pricing

Name	PriceExplanation
------	------------------

*Base XSD Type: string

PriceType

These field(s) use this type: **PriceType**.

Price Type

Name	PriceType
------	-----------

*Base XSD Type: string

Code Value	Description
------------	-------------

Job

Labor

Parts

Sublet

Miscellaneous

GasOilGrease

PaintMaterials

ShopSupplies

Freight

Claim

SubletLabor

SubletParts

Process Parts Pick List

Code Value	Description
ReturnCore	
Customer	Initiative applies to Customer category, e.g. First Time Buyer, etc.
Internal	
RentLoaner	
Return	
Splits	
Total	
Other	Other

Reference

These field(s) use this type: **ReferenceId.**

Reference notation

Name	Reference
------	-----------

*Base XSD Type: string

ReferenceNumber

Reference number

Name	ReferenceNumber
------	-----------------

*Base XSD Type: string

SecondaryPassword

These field(s) use this type: **SecondaryPassword.**

Process Parts Pick List

Secondary password used to validate access to the dealer information

Name	SecondaryPassword
------	-------------------

*Base XSD Type: string

ShortMfg

These field(s) use this type: SenderNameCode, DestinationNameCode.

Short Manufacturer or RSP Codes

Name	ShortMfg
------	----------

*Base XSD Type: string

SystemVersion

These field(s) use this type: SystemVersion.

The sender's software version number .

Name	SystemVersion
------	---------------

*Base XSD Type: string

Text

These field(s) use this type:

CreatorNameCode, StoreNumber, AreaNumber, Password, DestinationSoftwareCode, DestinationSoftware, StoreNumber, AreaNumber, LogicalId, Component, T

Indicates generic text type

Name	Text
------	------

*Base XSD Type: string

Process Parts Pick List

UOM

Units of Measure - ea=Each; bx=Box; case=Case; ctn=Carton; gal=Gallon; qt=Quart; pt=Pint; ft=Feet; yd=Yard; in=Inch; L=Liter; m=Meter; cm=Centimeter; kg=Kilograms; g=grams; other=Other

Name	UOM
Base XSD Type: string	
Code Value	Description
ea	Each
bx	Box
case	Case
ctn	Carton
gal	Gallon
qt	Quart
pt	Pint
ft	ft = feet
yd	yd = yard
in	in = inch
L	"L" = Canceled
m	m = meter
cm	cm = centimeter
kg	Kilogram
g	Gram
other	
tn	Ton

Process Parts Pick List

Code Value	Description
km	kilometers
mi	miles
hp	horsepower
kw	kilowatt

URI

These field(s) use this type: **SenderURI, DestinationURI.**

URI

Name	URI
------	-----

*Base XSD Type: anyURI

Fields and Global Attributes

Global declarations are items such as elements, attribute groups, and group definitions. These items are not defined within any particular component. A component may reference these definitions. Within a STAR XML Schemas these are typically known as global fields.

ApplicationArea

These field(s) use this type: ApplicationArea.

Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.

Provides the information that an application may need to know in order to communicate in an integration of two or more business applications. The ApplicationArea is used at the applications layer of communication. While the integration frameworks web services and middleware provide the communication layer that OAGIS operates on top of.

Name	ApplicationArea
Type	ApplicationArea
Nillable	no
Abstract	no

XML Instance Representation

```
<ApplicationArea>
  <Sender> Sender </Sender> [1]
  <CreationDateTime> DateTime </CreationDateTime> [1]
  <Signature> Signature </Signature> [0..1]
  <BODId> Code </BODId> [0..1]
  <Destination> Destination </Destination> [1]
</ApplicationArea>
```

Header

Process Parts Pick List

Name	Header
Type	PartsPickListHeaderBase
Nilable	no
Abstract	no

XML Instance Representation

```
<Header>  
  <DocumentDateTime> DocumentDateTime </DocumentDateTime> [0..1]  
  <SecondaryPassword> SecondaryPassword </SecondaryPassword> [0..1]  
  <SecondaryDealerNumber> SecondaryDealerNumber </SecondaryDealerNumber> [0..1]  
  <DocumentId> DocumentId </DocumentId> [0..1]  
</Header>
```

Line

.

Name	Line
Type	PartsPickListLine
Nilable	no
Abstract	no

XML Instance Representation

```
<Line>  
  <ItemQuantity> Quantity </ItemQuantity> [0..1]  
  <Part> PartsBase </Part> [1]  
  <Price> Price </Price> [0..1]  
</Line>
```

PartsPickList

These field(s) use this type: **PartsPickList**.

Process Parts Pick List

..

Name	PartsPickList
Type	PartsPickList
Nilable	no
Abstract	no

XML Instance Representation

```
<PartsPickList>
  <Header> ... </Header> [1]
  <Line> ... </Line> [1..*]
</PartsPickList>
```

Process

These field(s) use this type: **Process**.

The Process verb is used to request processing of the associated noun by the receiving application or business to party. In a typical external exchange scenario a Process BOD is considered to be a legally binding message. For example, if a customer sends a ProcessPurchaseOrder BOD to a supplier and the supplier acknowledges with a positive AcknowledgePurchaseOrder, then the customer is obligated to fulfil the agreement, unless of course other BODs are allowed to cancel or change the original order.

Name	Process
Type	Process
Nilable	no
Abstract	no

XML Instance Representation

```
<Process
confirm="ConfirmType [0..1]"
acknowledge="AcknowledgementType [0..1]">
  <Criteria> ActionExpressionCriteria </Criteria> [0..1]
```

Process Parts Pick List

```
</Process>
```

ProcessPartsPickList

These field(s) use this type: **ProcessPartsPickList**.

Name	ProcessPartsPickList
Type	ProcessPartsPickList
Nilable	no
Abstract	no

XML Instance Representation

```
<ProcessPartsPickList  
revision="Text [0..1]"  
release="8.1-Lite [0..1]"  
environment="Text [0..1]"  
lang="Language [0..1]"  
bodVersion="Text [0..1]">  
  <ApplicationArea> ... </ApplicationArea> [1]  
  <DataArea> ProcessPartsPickListDataArea </DataArea> [1]  
</ProcessPartsPickList>
```

Verb

These field(s) use this type: **Verb**.

Name	Verb
Type	Verb
Nilable	no
Abstract	yes

XML Instance Representation

Process Parts Pick List

<Verb/>

Process Parts Pick List
